
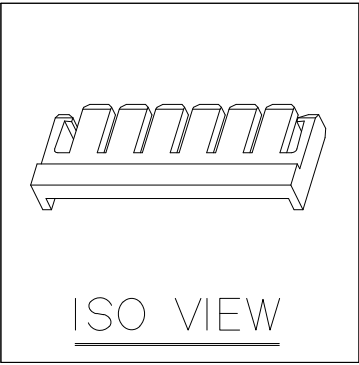


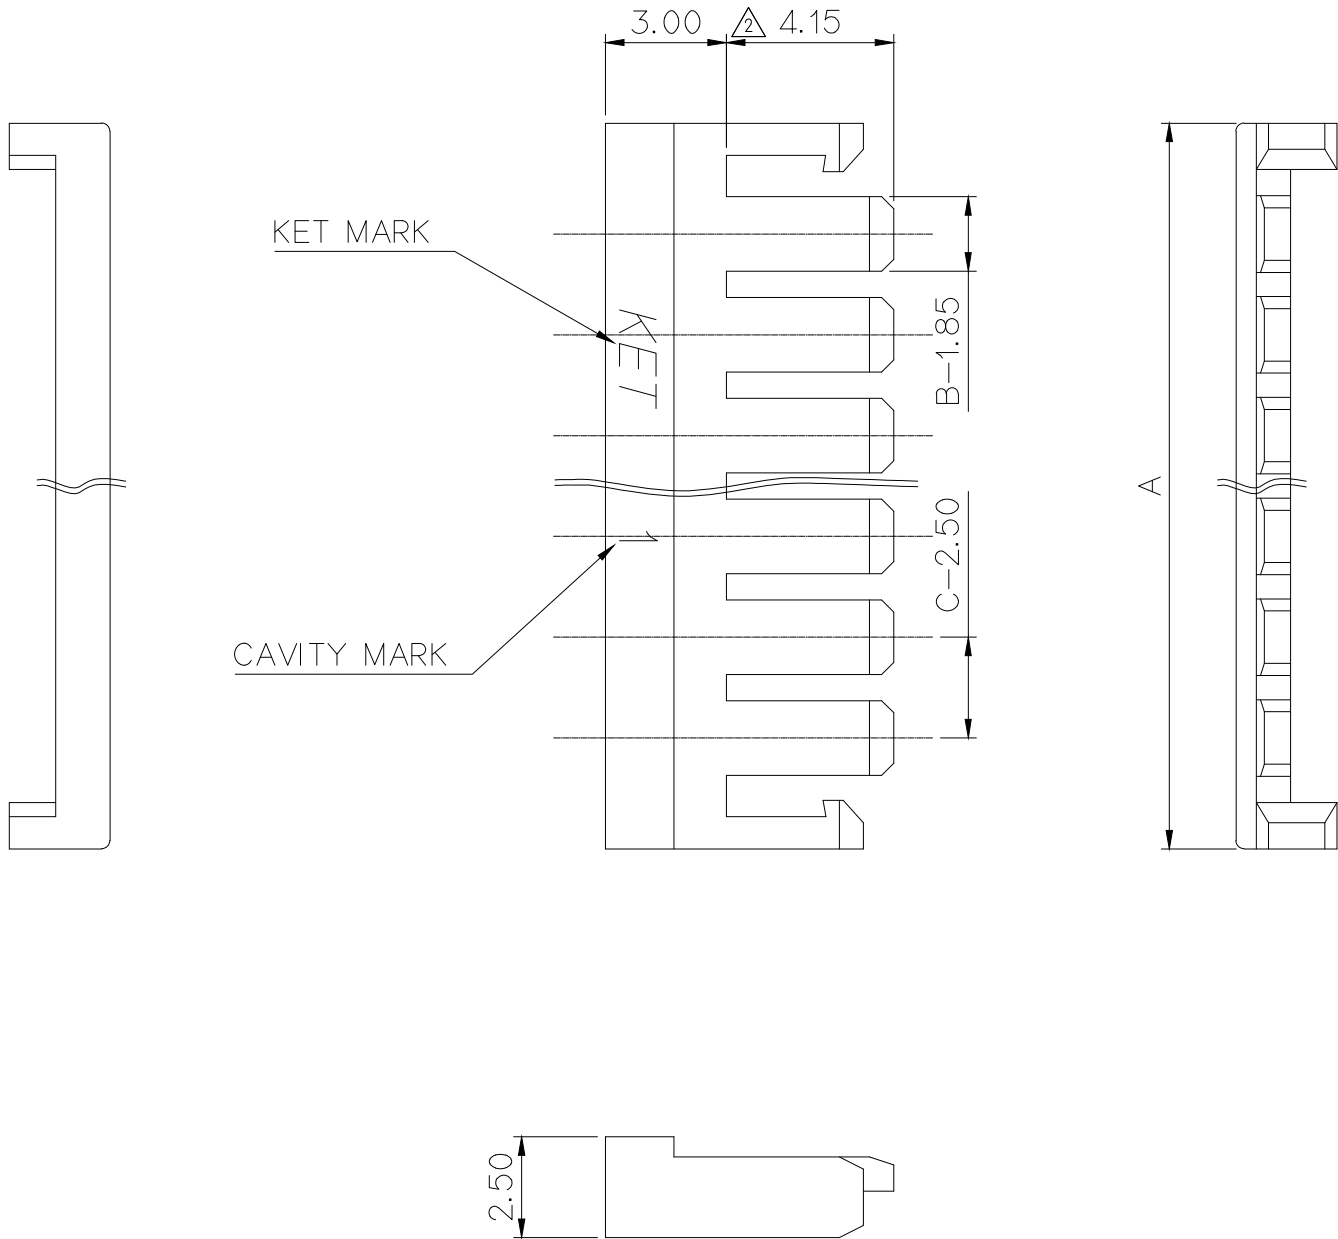

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

PIN	PART NO.	A	B	C
2	635826-∗02	8.0	2	1
3	635826-∗03	10.5	3	2
4	635826-∗04	13.0	4	3
5	635826-∗05	15.5	5	4
6	635826-∗06	18.0	6	5
7	635826-∗07	20.5	7	6
8	635826-∗08	23.0	8	7
9	635826-∗09	25.5	9	8
10	635826-∗10	28.0	10	9
11	635826-∗11	30.5	11	10
12	635826-∗12	33.0	12	11
13	635826-∗13	35.5	13	12
14	635826-∗14	38.0	14	13
15	635826-∗15	40.5	15	14

△	NO.	COLOR
	0	NATURAL
*	1	RED
*	2	BLUE

주 기

- 1.기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
- 2.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- 3.MATING HOUSING : MG615632-∗NN
4. * : COLOR

APPROVED

2019-11-06

**KOREA ELECTRIC
TERMINAL CO., LTD.**
Electronic Product Development Team

ISSUE MARK

						MATERIAL		PET+PC(GWIT)			KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH		SEE TABLE			
						WIRE RANGE				CLASS	2.5mm WTB
	ECO-1811-065근거 수정		PSH KSH	BUC	'18.11.05	INSULATION				TYPE	
	ECO-1804-067근거 수정		PSH KSH	BUC	'18.04.09						
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 5/1	PART NO. MG635826-∗NN	
DR.		PSH.	CHK.		KSH.		PART NAME 2.5 REAR HOLDER (2P~15P)				
CHK.				APP.	BUC.						