

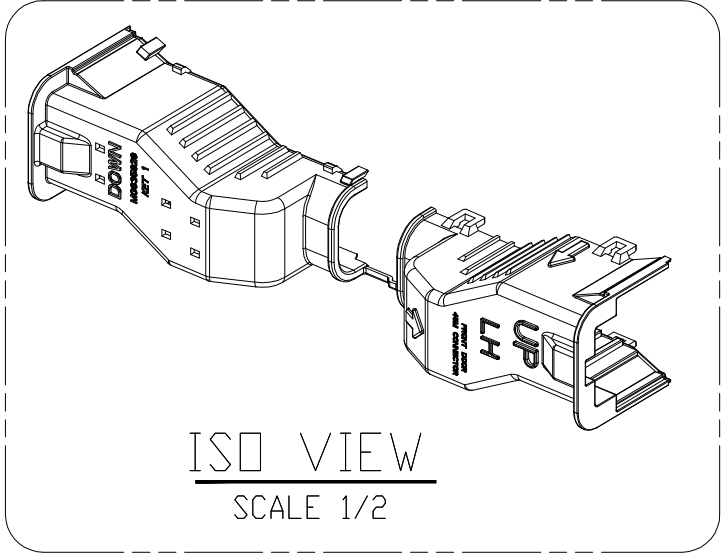
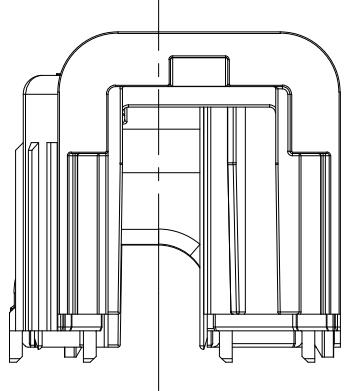


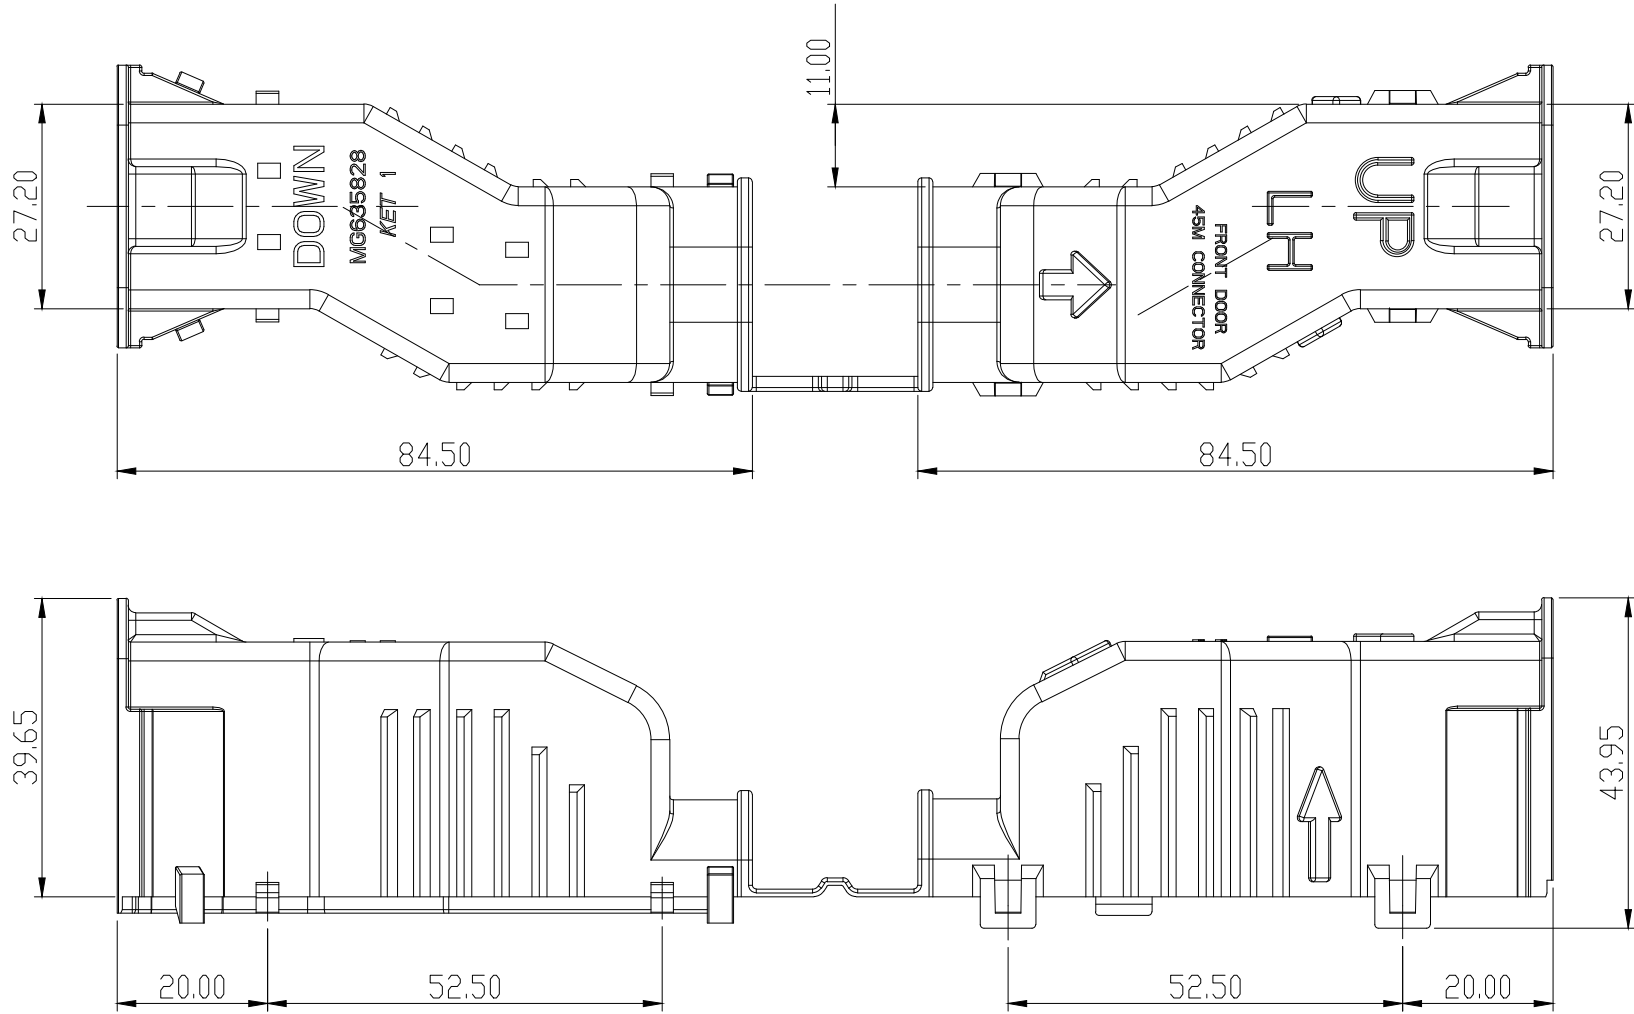

ISO VIEW
SCALE 1/2

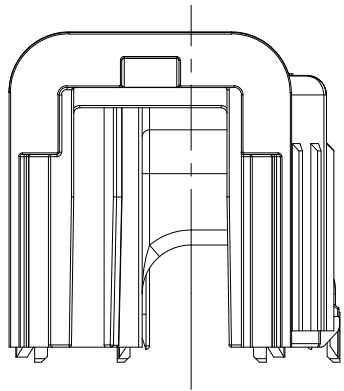

GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

NO.	MATERIAL	COLOR
0	P P	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE MALE ASSY: MG646085-5
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHOULD NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 지시하지 않은 반경 R은 0.3로 한다.
- 지시하지 않은 모따기 C는 0.3으로 한다.
- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 MALE ASSY: MG646085-5
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH	SEE TABLE			
					WIRE RANGE	—		CLASS 025/060/110/FAKRA	
					INSULATION	—		TYPE 비방수	
	도면 이력<개발->양산) ECO-1705-233 근거 도면 재작성	KIN	CHK	SUK	17.05.18				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG635828-5
DR. CYK 2016.12.21		CHK.							
CHK. LJE 2016.12.21		APP. BIN 2016.12.21				PART_NAME 025060110 FAKRA_FRONT_DOOR_45M WIRE COVER_LH			