
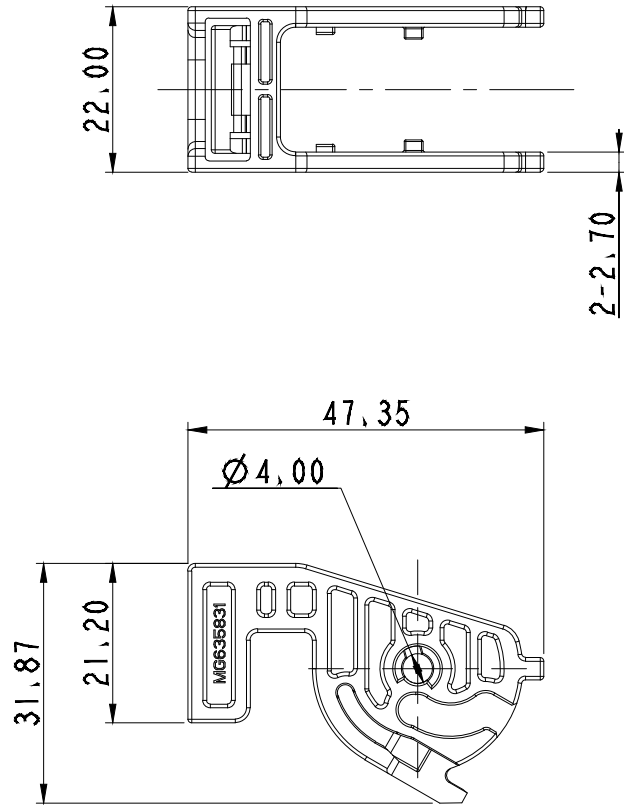
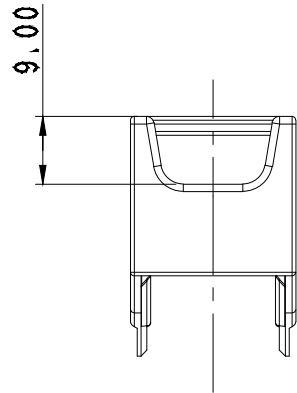
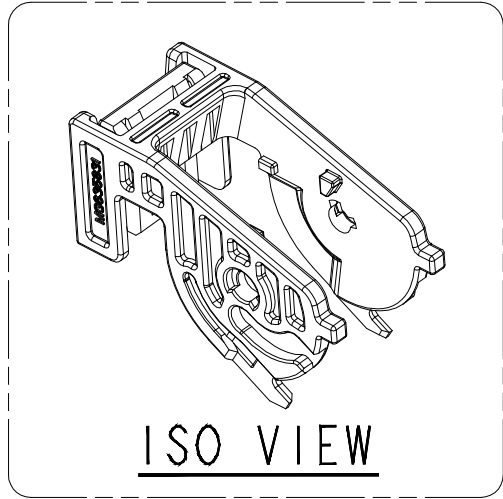
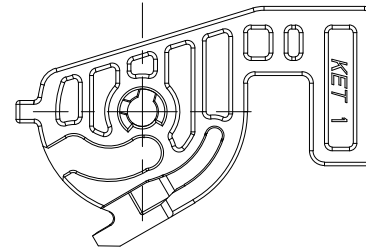


GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

- 주 기
1. 지시하지 않은 반경 R은 0.3로 한다.
 2. 지시하지 않은 모따기 C는 0.3으로 한다.
 3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
 4. 적용 HOUSING: MG656928
 5. KET 문자 : 기울기 15° (H: 0.1~0.2, SIZE: 2.0)
CAVITY NO. : 기울기 0° (H: 0.1~0.2, SIZE: 2.0)
 6. HOUSING 표면 부사사양 : KDP-6A
 7. 제품내 함유된 6대 유해물질(납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

- NOTE
1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
 2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
 3. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 4. APPLICABLE HOUSING: MG656928
 5. KEY MARK : TAPER 15° (H: 0.1~0.2, SIZE: 2.0)
CAVITY NO. : TAPER 0° (H: 0.1~0.2, SIZE: 2.0)
 6. HOUSING ETCHING SPEC : KDP-6A
 7. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PPDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL		SEE TABLE		KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH		SEE TABLE				
					WIRE RANGE		CLASS			HYBRID	
					INSULATION		TYPE			025060	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO.	MG635831
DR, NST 2017, 04, 03			CHK.								
CHK, WDH 2017, 04, 03			APP, LJE 2017, 04, 03			PART_NAME					025060 44F LEVER