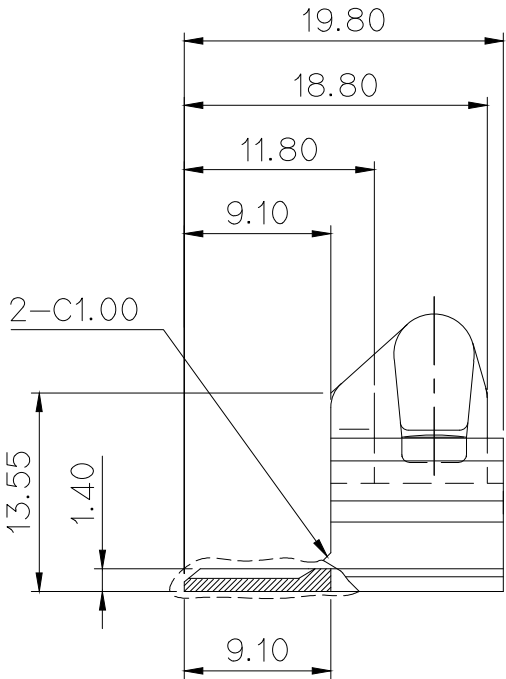
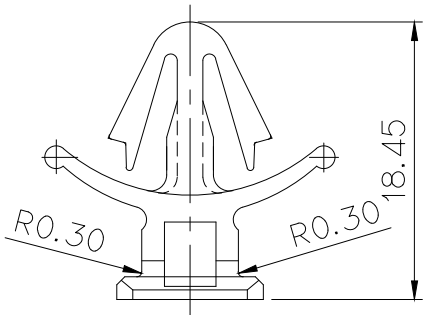
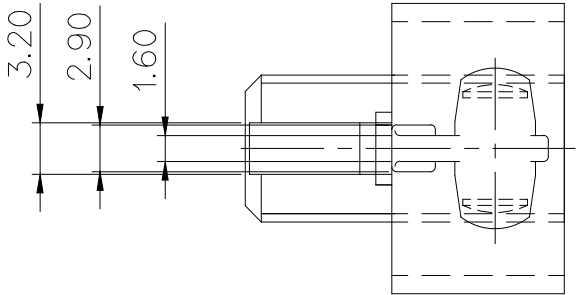
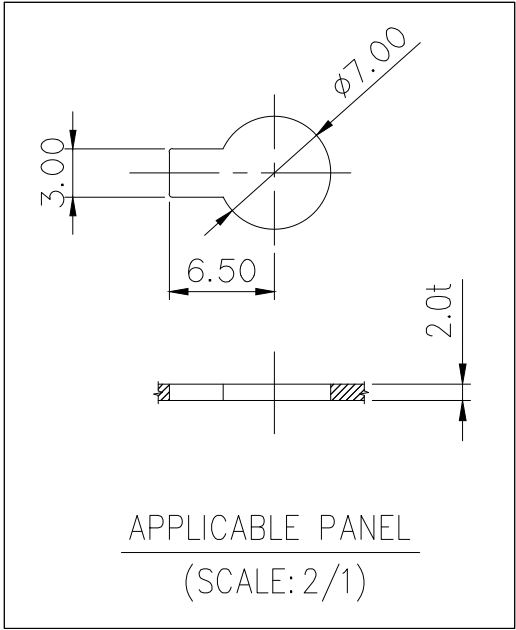



GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 HS'G : MG650943, MG652934
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG650943, MG652934
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

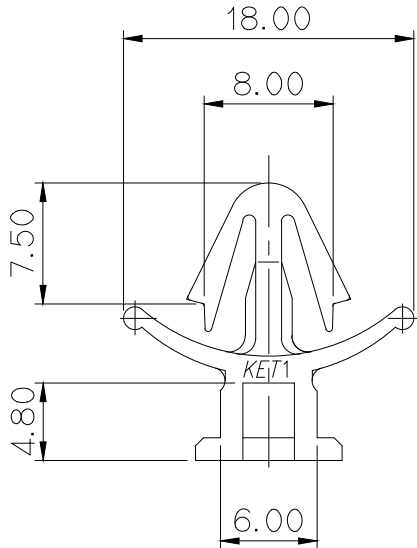

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL	NYLON66	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	BLACK		
						WIRE RANGE		CLASS	
						INSULATION		TYPE	
△	ECO-1711-133 근거 도면 변경 (GENERAL TOLERANCE TABLE 변경)	YSS	CKI	CMS	17.11.09	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG635843
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NAME	△312II WP 1P 2P CLIP (ø7 KEY HOLE)		
	DR. CYK 17.07.06	CHK. CKI		APP. LJE	17.07.06				