

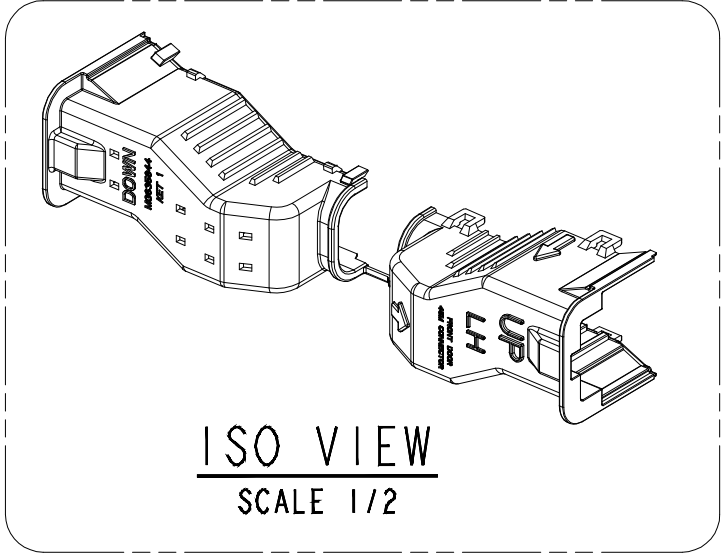


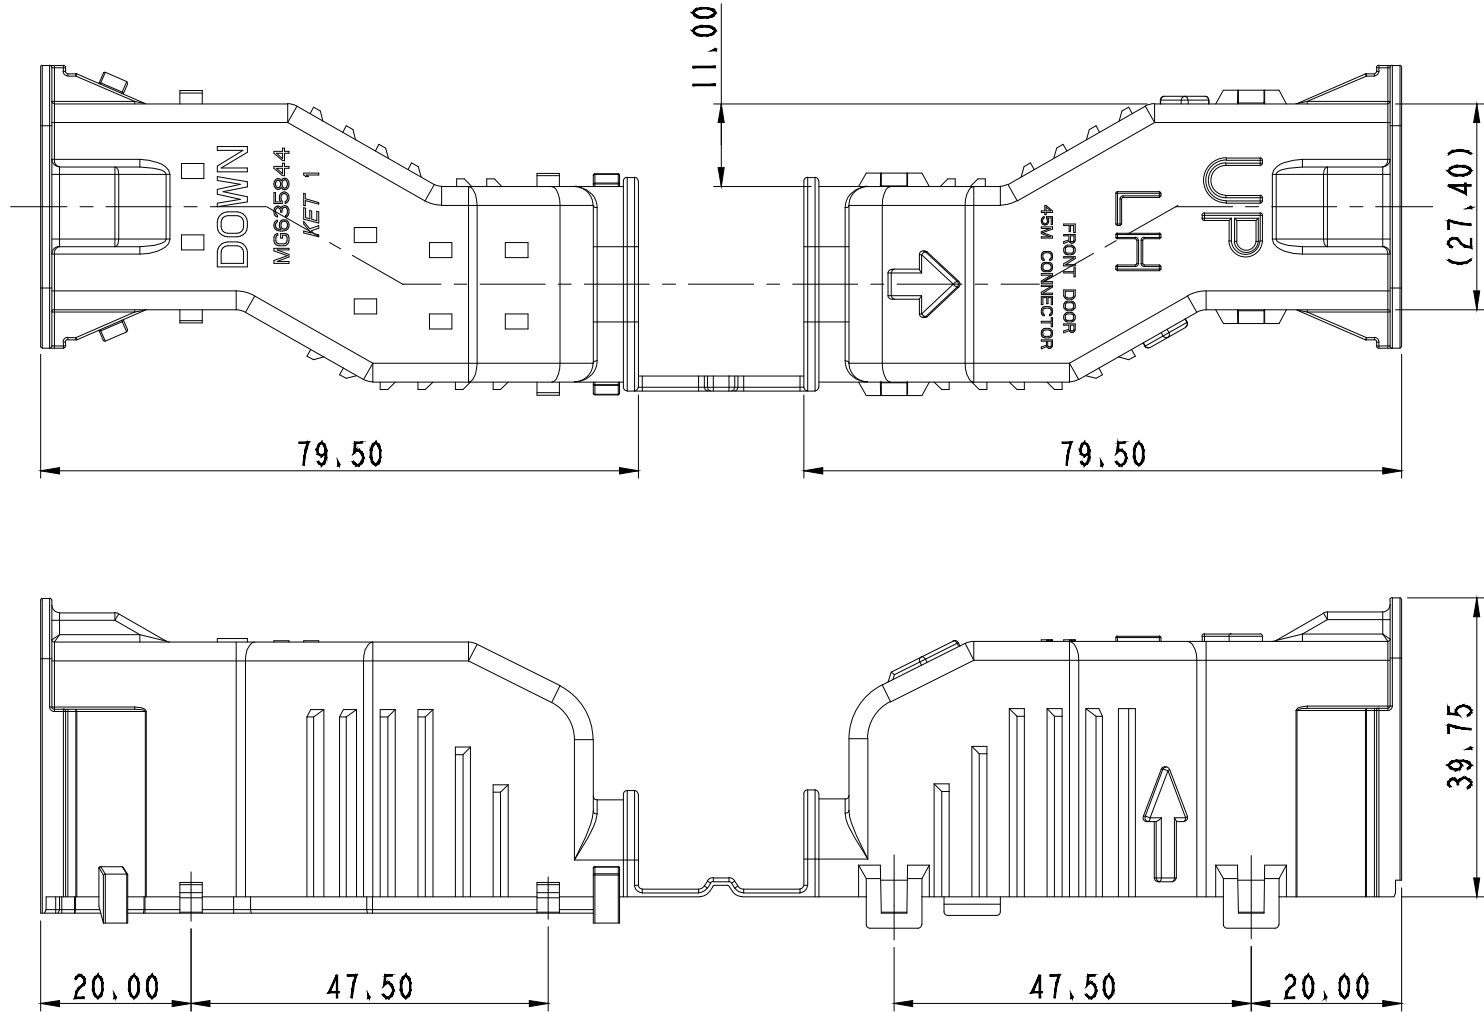

ISO VIEW
SCALE 1/2

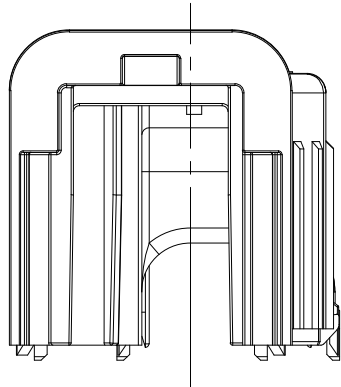

GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

NO.	MATERIAL	COLOR
0	P P	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

NOTE

1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE MALE ASSY: MG646085-5
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
2. 적용 MALE ASSY: MG646085-5
3. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

				MATERIAL	SEE TABLE	KIET ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD.
				FINISH	SEE TABLE	
				WIRE RANGE	-	
				INSULATION	-	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	CLASS 025/060/110/FAKRA TYPE 비방수 PART NO. MG635844-5
DR. JY.K	2017.08.22	CHK.				
CHK. WDH	2017.08.22	APP. LJE			2017.08.22	
				TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1
				PART_NAME		025060110 FAKRA FRONT DOOR 45M WIRE COVER LH (B)