
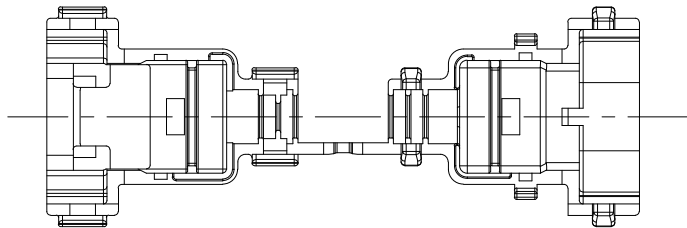
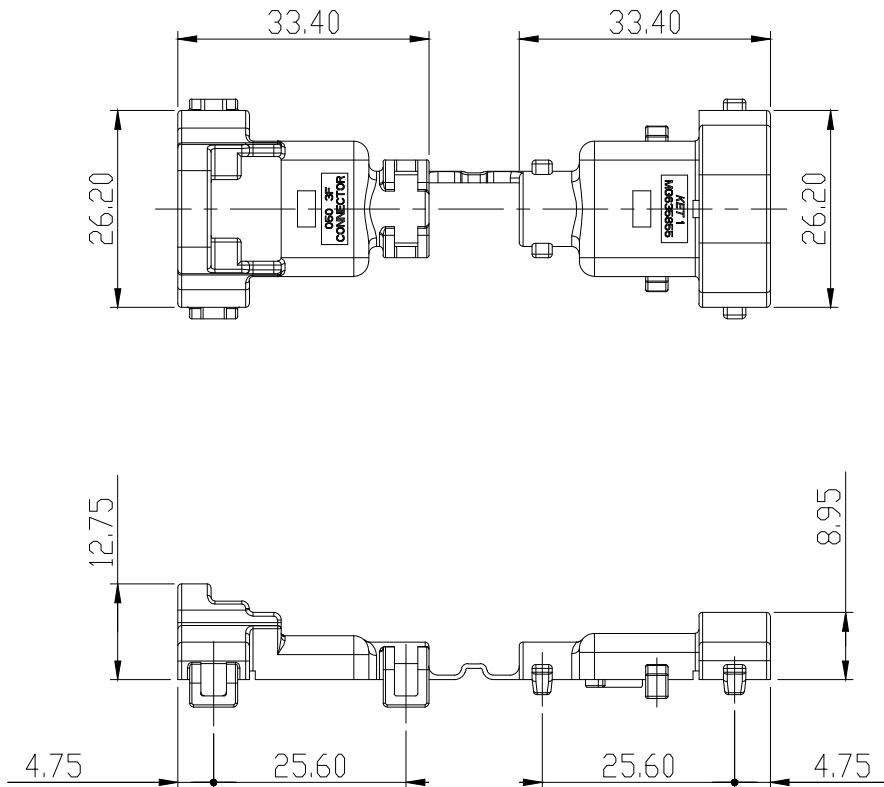



PART NO. MG635855

CUSTOMER DRAWING

DIMENSIONS IN MM

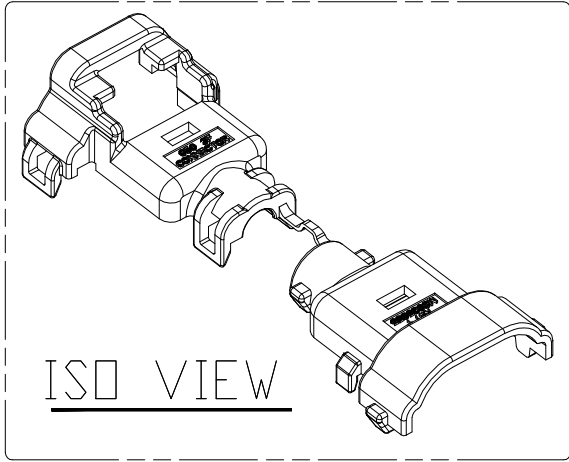

GENERAL TOLERANCE (HOUSING)

10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

- NOTE
1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
 2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
 3. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 4. APPLICABLE FEMALE ASSY: MG643744
APPLICABLE CORRUGATED TUBE : Ø5.0
 5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHOULD NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

- 주 기
1. 지시하지 않은 반경 R은 0.3로 한다.
 2. 지시하지 않은 모따기 C는 0.3으로 한다.
 3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
 4. 적용 FEMALE ASSY: MG643744
적용 CORRUGATED : Ø5.0
 5. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	MATERIAL	COLOR
0	PP	NATURAL
1		RED
11		ORANGE
2		BLUE
22		JADE
3		YELLOW
4		GRAY
41		LIGHT GRAY
42		DARK GRAY
* 5		BLACK
61		LIGHT GREEN
62		DARK GREEN
7		BROWN
9		MAGENTA

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL	SEE TABLE	KIET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	SEE TABLE		
					WIRE RANGE	—	CLASS	050
					INSULATION	—	TYPE	
△	검보 합격에 의한 양산도면 출도	LJJ	AJH	CMS	17.12.08			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG635855
	DR. KMY 2017.09.11				CHK. CKI 2017.09.11			
	CHK.				APP. SSH 2017.09.11	PART_NAME	050 WP 3F WIRE COVER	