


PART NO. MG635859

CUSTOMER DRAWING



ISO VIEW
SCALE 1/2






GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE FEMALE ASSY; MG641238
APPLICABLE CORRUGATED TUBE ; $\varnothing 5.0$
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHOULD NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

1. 지시하지 않은 반경 R은 0.3로 한다.
2. 지시하지 않은 모따기 C는 0.3으로 한다.
3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
4. 적용 FEMALE ASSY; MG641238
적용 CORRUGATED TUBE ; $\varnothing 5.0$
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

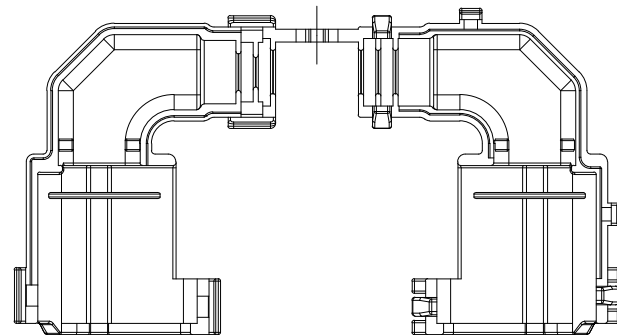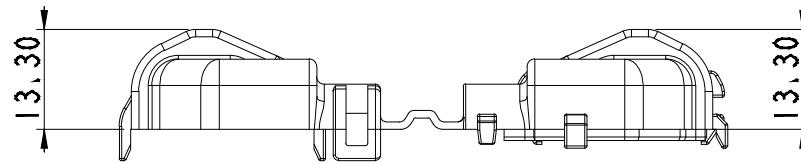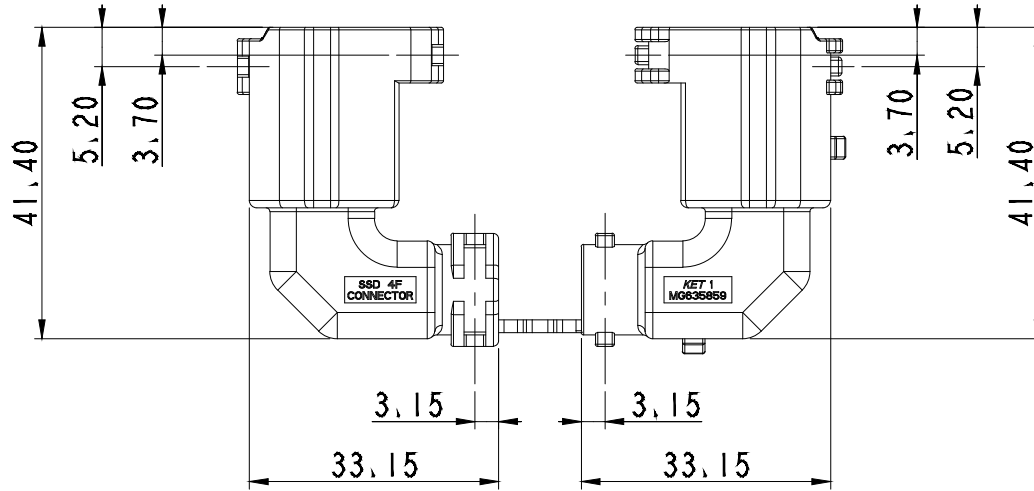

NO.	MATERIAL	COLOR
0	PP	NATURAL
1		RED
11		ORANGE
2		BLUE
22		JADE
3		YELLOW
4		GRAY
41		LIGHT GRAY
42		DARK GRAY
* 5		BLACK
61		LIGHT GREEN
62		DARK GREEN
7		BROWN
9		MAGENTA

ISSUE MARK

					MATERIAL	SEE TABLE			
					FINISH	SEE TABLE			
					WIRE RANGE	-		CLASS	WIRE COVER
					INSULATION	-		TYPE	SSD
	경보 알람에 의한 불조도전 종료			LJJ	AJH	CMS	18.02.23		
LTR	REVISION RECORD			DR,	CHK,	APP,	DATE		
DR, LJJ 2017, 10, 27				CHK, CKI 2017, 10, 27					
CHK,				APP, CMS 2017, 10, 27					
				TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE 1/1	PART NO, MG635859	
				PART_NAME SSD WP 4F WIRE COVER					