

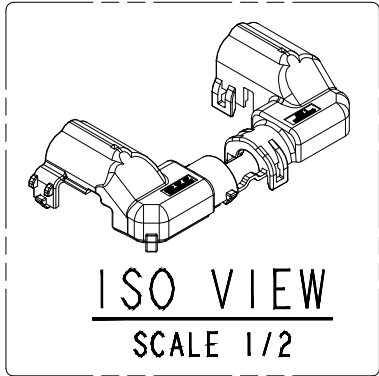



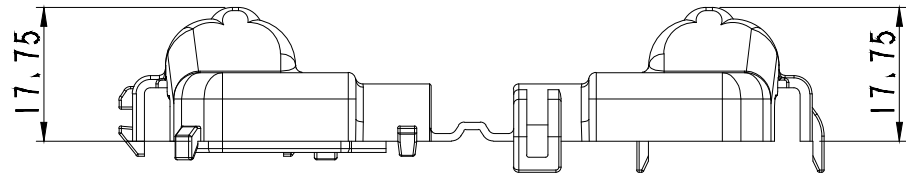


GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

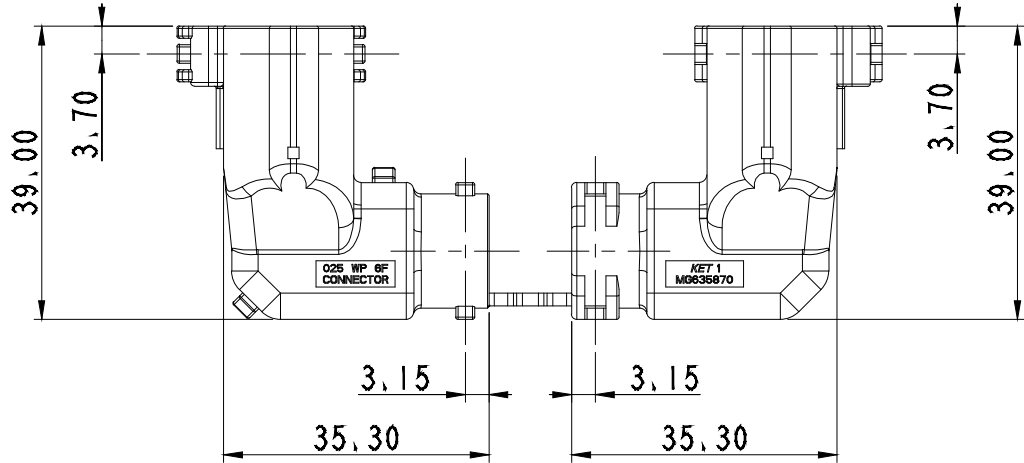

- 주 기
- 1, 지시하지 않은 반경 R은 0.3로 한다,
 - 2, 지시하지 않은 모따기 C는 0.3으로 한다,
 - 3, 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
 - 4, 적용 FEMALE ASSY; MG643284
적용 CORRUGATED TUBE ; Ø7.0
 - 5, 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,

- NOTE
- 1, UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS,
 - 2, UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER,
 - 3, MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION,
 - 4, APPLICABLE FEMALE ASSY; MG643284
APPLICABLE CORRUGATED TUBE ; Ø7.0
 - 5, 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHOULD NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION,

NO.	MATERIAL	COLOR
0	PP	NATURAL
1		RED
11		ORANGE
2		BLUE
22		JADE
3		YELLOW
4		GRAY
41		LIGHT GRAY
42		DARK GRAY
* 5		BLACK
61		LIGHT GREEN
62		DARK GREEN
7		BROWN
9		MAGENTA

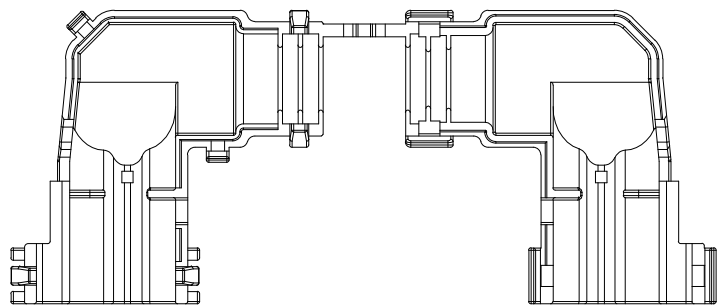

				MATERIAL	SEE NOTE	 KOREA ELECTRIC TERMINAL CO., LTD. 2018-11-19	
				FINISH	SEE NOTE		
				WIRE RANGE	-	CLASS	WIRE COVER
				INSULATION	-	TYPE	025
				LTR	REVISION RECORD	DR, YSS 2018.03.06	CHK, APP, DATE
				CHK, AJH 2018.03.06	APP, CMS 2018.03.06	PART NO.	MG635870
				PART_NAME			
				025 WP 6F WIRE COVER (B)			

