
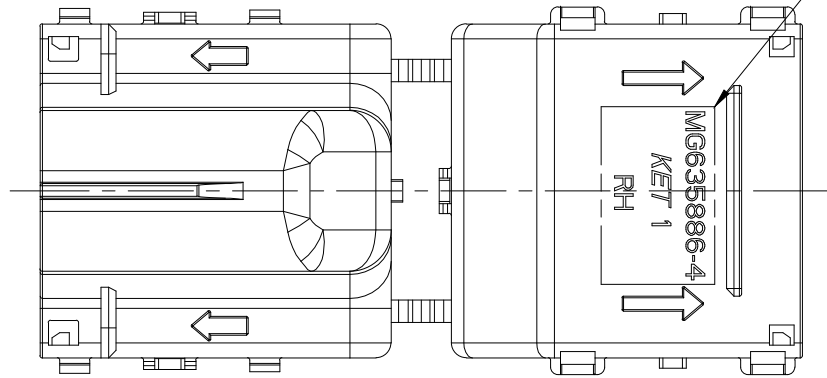
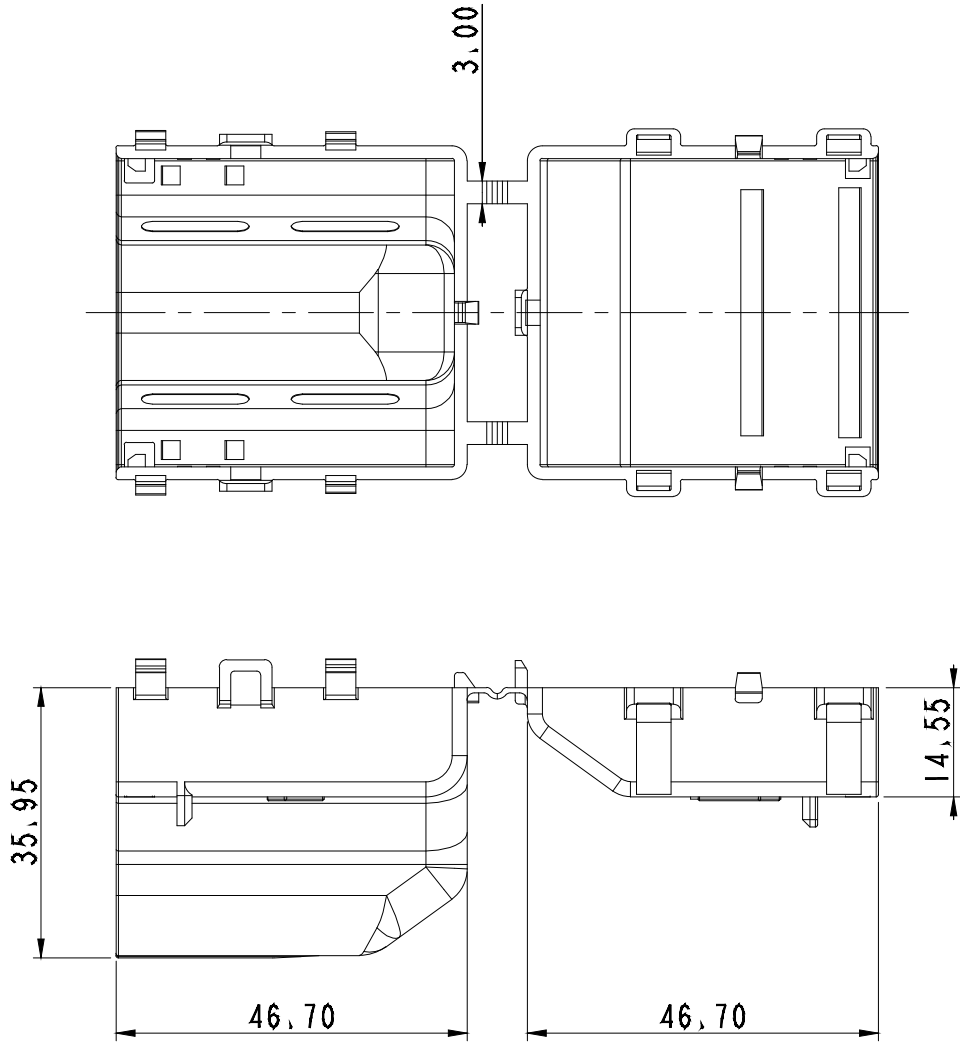
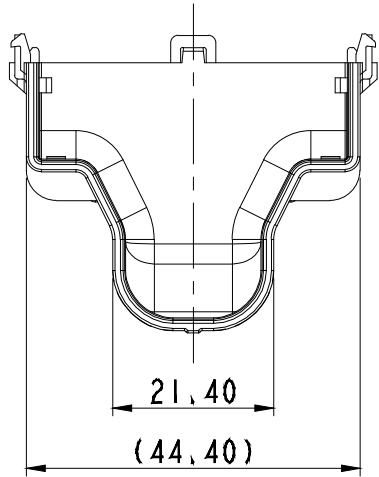


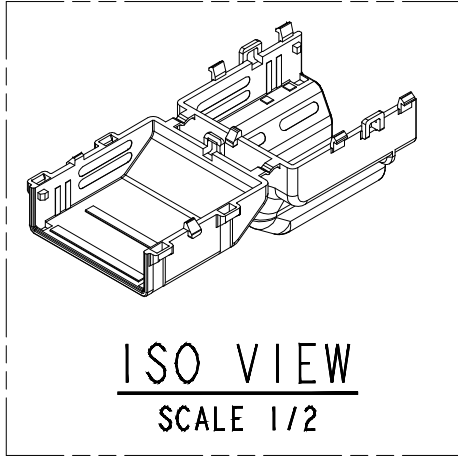

GENERAL TOLERANCE (HOUSING)

USED ON

10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

- 주 기
- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
 - 적용 HOUSING: MG646195
 - KET 문자 : 기울기 15° (H: 0.1~0.2, SIZE: 2.0)
CAVITY NO. : 기울기 0° (H: 0.1~0.2, SIZE: 2.0)
 - HOUSING 표면 부식사양 : KDP-6A
 - 제품내 함유된 6대 유해물질(납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	MATERIAL	COLOR
0	P.P	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
* 4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

각인 TABLE 참조

- NOTE
- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 - APPLICABLE HOUSING: MG646195
 - KEY MARK : TAPER 15° (H: 0.1~0.2, SIZE: 2.0)
CAVITY NO. : TAPER 0° (H: 0.1~0.2, SIZE: 2.0)
 - HOUSING ETCHING SPEC : KDP-6A
 - 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXVALENT CHROMIUM, PBBs, PPDEs) SHOULD NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

				MATERIAL	SEE TABLE	
				FINISH	SEE TABLE	
				WIRE RANGE	-	
				INSULATION	-	
				TOLEANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1
				PART_NAME	025060110250 RF 50M WIRE COVER	

ISSUE MARK



△	중대 결함시 열처리 또는 도금 재작업 (ECO-1810-382)	LCK	WDH	CMS	'18.10.31
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR, LCK 2018.04.11		CHK, WDH 2018.04.11			
CHK,		APP, CMS 2018.04.11			

PART NO.	PART NAME	FINISH	각인사양
MG635885-5	025060110250 RF 50M WIRE COVER_LH	BLACK	LH
MG635886-4	025060110250 RF 50M WIRE COVER_RH	GRAY	RH