
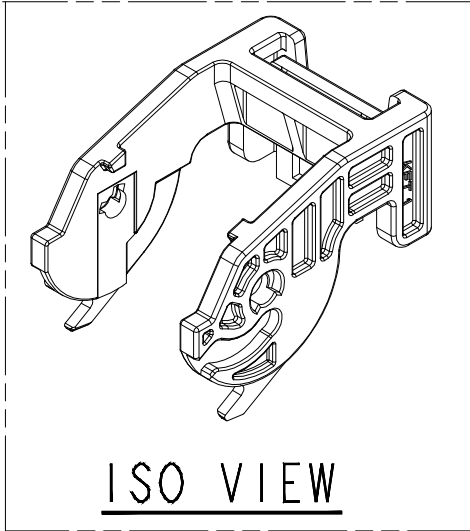
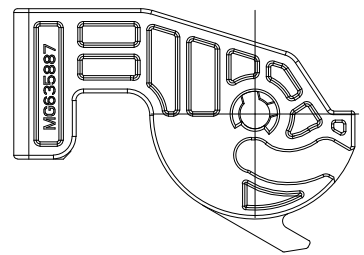


GENERAL TOLERANCE (HOUSING)

10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 CONNECTOR: MG657013
3. KET 문자 : 기울기 15° (H; 0.1~0.2, SIZE; 1.5)
CAVITY NO. : 기울기 0° (H; 0.1~0.2, SIZE; 1.5)
4. HOUSING 표면 부식 사양: KDP-6A
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

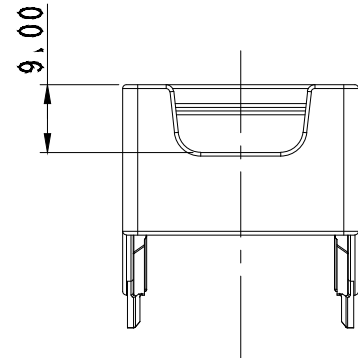

NO.	MATERIAL	COLOR
0	P O M	NATURAL
1		RED
2		BLUE
22		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
62		DARK GREEN
7		BROWN
61		LIGHT GREEN
9		MAGENTA
11		ORANGE

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE CONNECTOR: MG657013
3. KET MARK : TAPER 15° (H; 0.1~0.2, SIZE; 1.5)
CAVITY NO. : TAPER 0° (H; 0.1~0.2, SIZE; 1.5)
4. HOUSING ETCHING SPEC : KDP-6A
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL	SEE TABLE	KIET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.			
						FINISH	SEE TABLE					
						WIRE RANGE	-	CLASS	비방수			
						INSULATION	-	TYPE	C025/C060/N110/N250/RF			
	중대 실책시 열악해 되면 모든 제작상 (ECO-1810-382)	LCK	WDH	CMS	'18.10.31	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO.	MG635887			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE							
DR, LCK 2018.04.11		CHK, WDH 2018.04.11			PART_NAME							
CHK,		APP, CMS 2018.04.11			025060110250 RF 50F LEVER							