


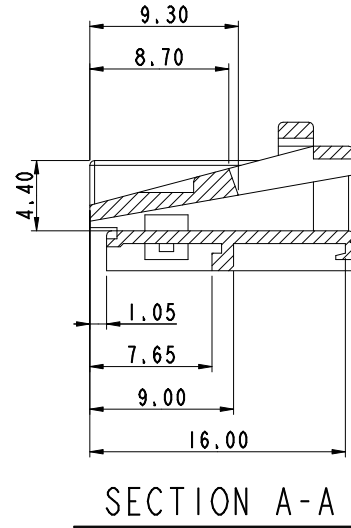


GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	



NO.	MATERIAL	COLOR
0	PBT-GF15	NATURAL
* 1		RED
11		ORANGE
2		BLUE
22		JADE
3		YELLOW
4		GRAY
41		LIGHT GRAY
42		DARK GRAY
* 5		BLACK
61		LIGHT GREEN
62		DARK GREEN
7		BROWN
9		MAGENTA



AK 064 4F COVER (A TYPE)/BLACK		AK 064 4F COVER (C TYPE)/RED	
PART NO.	MG635923-5	PART NO.	MG635916-1

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 HOUSING : MG615665
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING : MG615665
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

				MATERIAL	SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD.	
				FINISH	SEE TABLE		
				WIRE RANGE	-	CLASS	NON WATERPROOF
				INSULATION	-	TYPE	AK 064
				DR.	CHK.	APP.	DATE
LTR REVISION RECORD				DR.	CHK.	APP.	DATE
DR. CYK 2018.11.30				CHK.			
CHK. AJH 2018.11.30				APP.	CMS	2018.11.30	
				TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 3/1	PART NO. MG635916
				PART-NAME	AK 064 4F COVER (C TYPE)		