

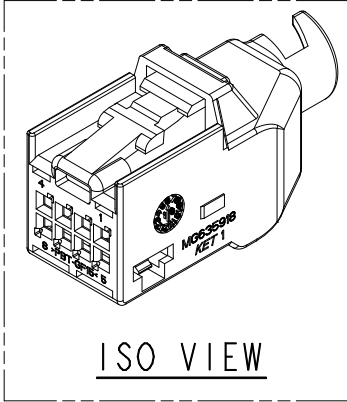
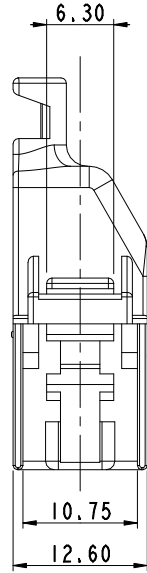
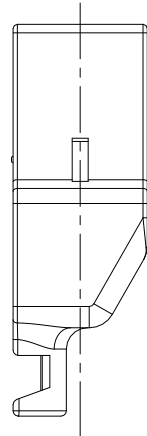




ISO VIEW

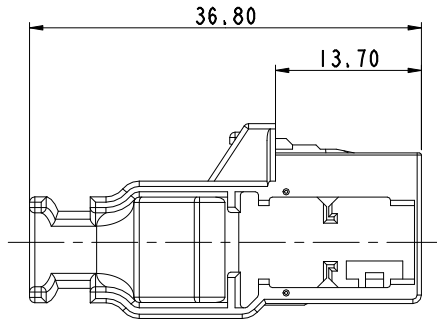

GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	



주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 HOUSING: MG615667
3. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING: MG615667
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	MATERIAL	COLOR
0	PBT-GF15	NATURAL
1		RED
11		ORANGE
2		BLUE
22		JADE
3		YELLOW
4		GRAY
41		LIGHT GRAY
42		DARK GRAY
* 5		BLACK
61		LIGHT GREEN
62		DARK GREEN
7		BROWN
9		MAGENTA

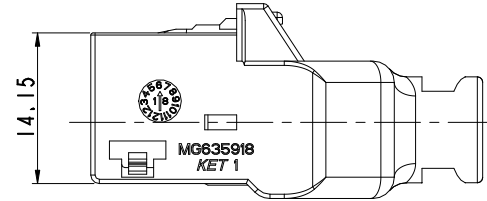

ISSUE MARK

				MATERIAL	SEE TABLE		KOREA ELECTRIC TERMINAL CO., LTD.
				FINISH	SEE TABLE		
				WIRE RANGE	-		
				INSULATION	-		
Drawing Transfer (Development) -> Mass Production ECO-2002-524 Basic Drawing Verifying				DR.	CHK.	APP.	DATE
LTR				DR.	CHK.	APP.	DATE
DR. KTK 2018.11.30				CHK. LJJ 2018.11.30			
CHK. AJH 2018.11.30				APP. CMS 2018.11.30			
TOLERANCE EXCEPT AS NOTED					SEE TABLE	SCALE 2/1	PART NO. MG635918
PART_NAME					AK 064 8F HOUSING COVER A		