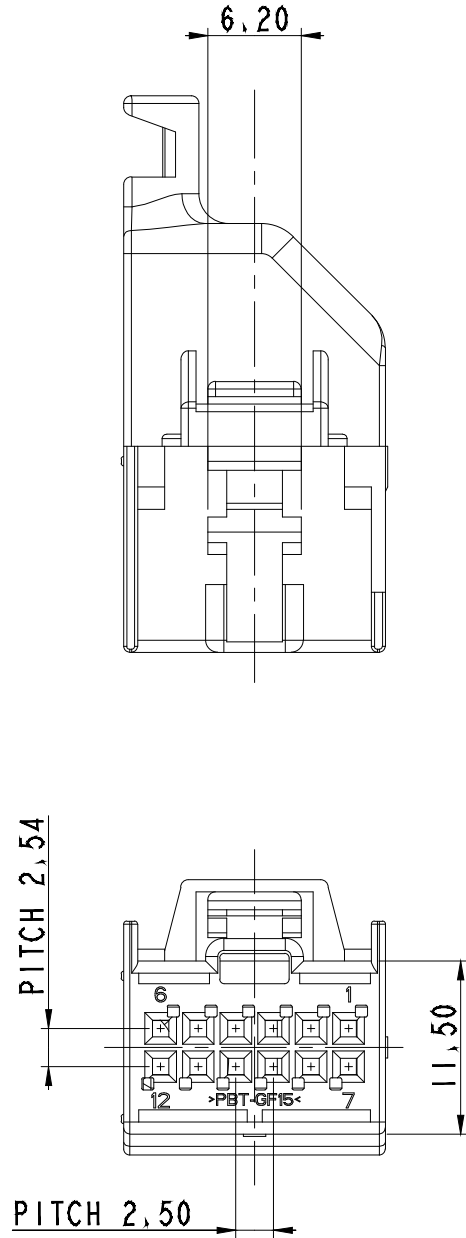
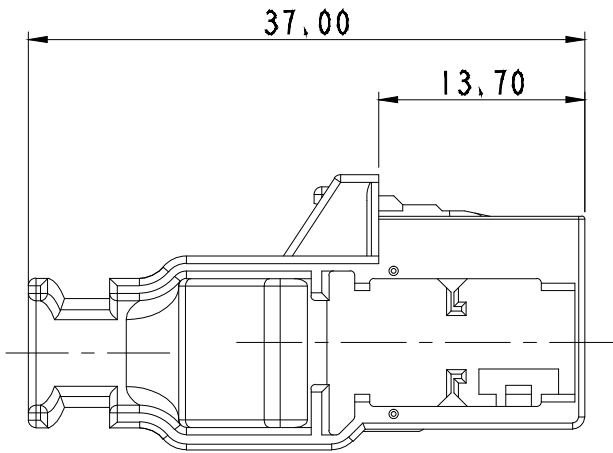
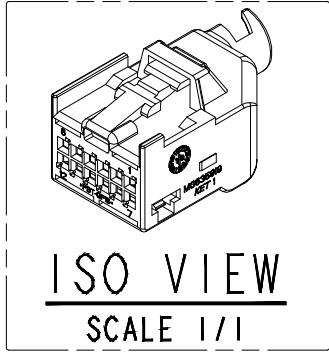


GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

- 주기
- 1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
 - 2. 적용 HOUSING : MG615668
 - 3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,

- NOTE
- 1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION,
 - 2. APPLICABLE HOUSING : MG615668
 - 3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION,

NO.	MATERIAL	COLOR
0	PBT GF15	NATURAL
1		RED
11		ORANGE
2		BLUE
22		JADE
3		YELLOW
4		GRAY
41		LIGHT GRAY
42		DARK GRAY
* 5		BLACK
61		LIGHT GREEN
62		DARK GREEN
7		BROWN
9		MAGENTA

APPROVED

2021-04-02

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH SEE TABLE			
						WIRE RANGE -			CLASS AK 064
						INSULATION -			TYPE non-waterproof
	Drawing Transfer (Development -> Mass Production) ECO-2002-372 basic drawing rewriting	LJJ	AJH	CMS	20.02.28				
LTR	REVISION RECORD	DR,	CHK,	APP,	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG635919	
DR, LJJ 2018.11.30		CHK,							
CHK, AJH 2018.11.30		APP, CMS 2018.11.30				PART_NAME AK 064 12F COVER A			