
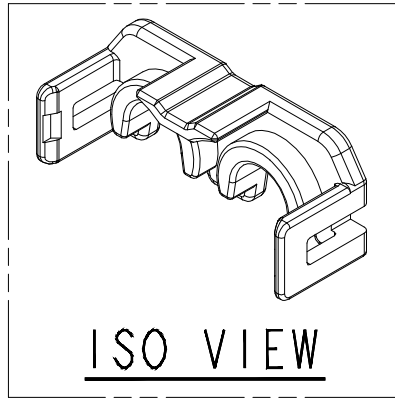
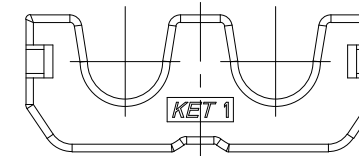



SECTION B-B

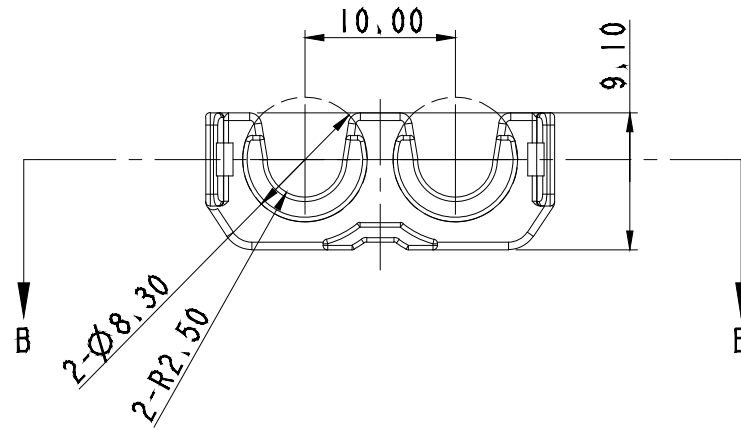

GENERAL TOLERANCE (HOUSING)

10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1	

NO.	MATERIAL	COLOR
0	PBT	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
41		LIGHT GRAY
* 42		DARK GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
4. THIS PART IS A COMPONENT OF MG646277 SUB-ASSEMBLES WITH MG677349
5. KET MARK : TAPER 15° (H; 0.3~0.5, SIZE; 1.0) CAVITY NO. : TAPER 0° (H; 0.3~0.5, SIZE; 1.0)
6. HOUSING ETCHING SPEC : KDP-6A
7. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

1. 지시하지 않은 반경 R은 0.3로 한다.
2. 지시하지 않은 모따기 C는 0.3으로 한다.
3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
4. 본 부품은 MG646277의 구성 부품으로 MG677349와 조립된다.
5. KET 문자 : 기울기 15° (H; 0.3~0.5, SIZE; 1.0) CAVITY NO. : 기울기 0° (H; 0.3~0.5, SIZE; 1.0)
6. HOUSING 표면 부식 사양 : KDP-6A
7. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2021-04-02

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL	SEE TABLE	KIET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	SEE TABLE		
					WIRE RANGE	-	CLASS	C060/110(280)/N250
					INSULATION	-	TYPE	WP
△	ECO-1911-16T 근거 도면 제작성	STJ	KSC	CJH	19.11.12		PART NO.	MG635920
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLENANCE EXCEPT AS NOTED	SCALE	2/1
	DR. YCH 2018.12.05				CHK. WDH 2018.12.05		PART_NAME	060110250 WP 16M REAR HOLDER
	CHK.				APP. CMS 2018.12.05			