



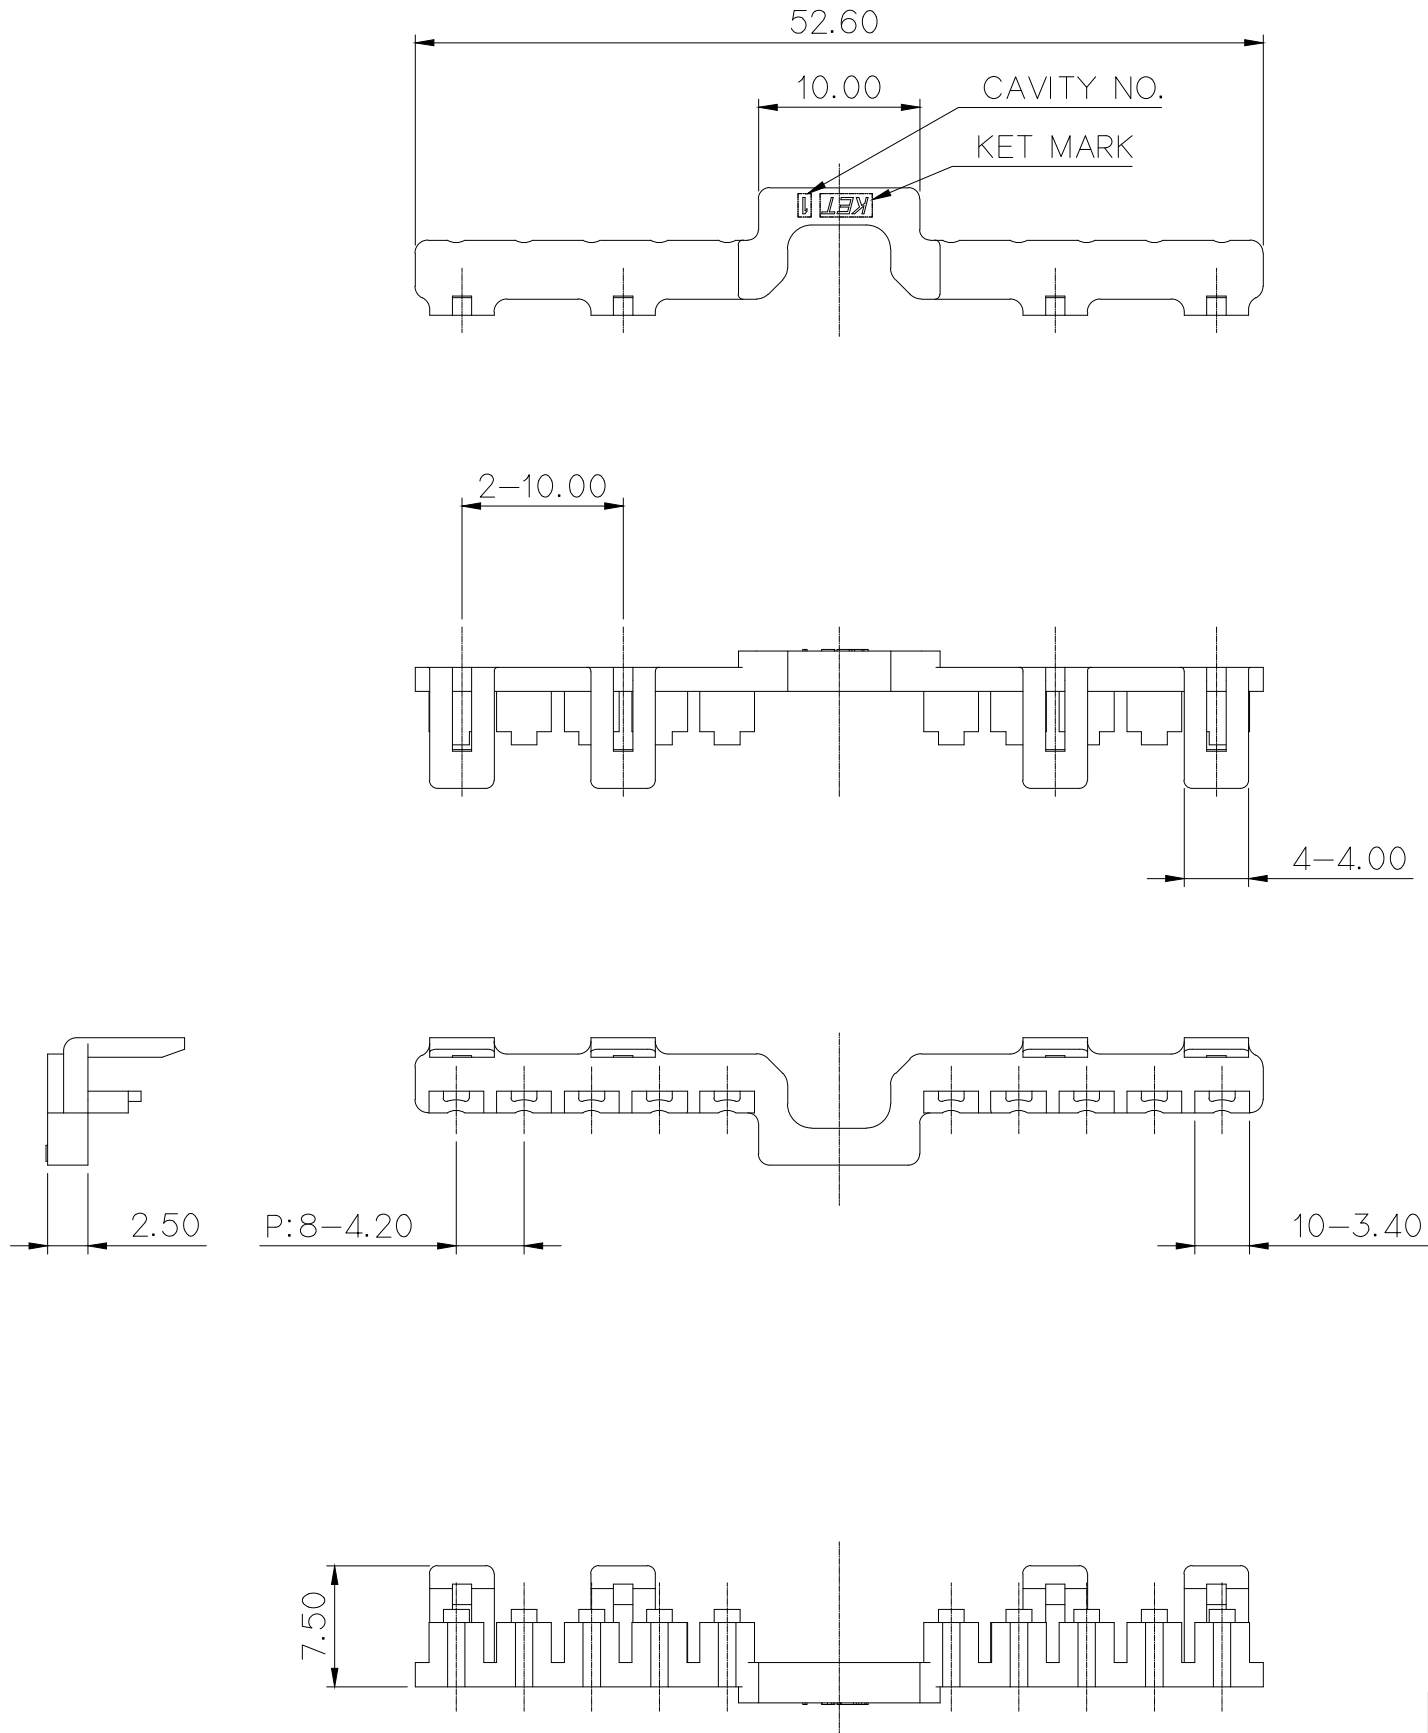

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100 VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

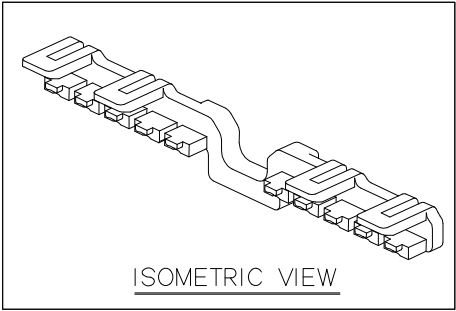

주 기

- 1.지시하지 않은 반경 R은 0.3으로 한다.
- 2.지시하지 않은 모따기 C는 0.3으로 한다.
- 3.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 4.적용 HOUSING : MG625488-024, MG615675-024
5. 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE HOUSING : MG625488-024, MG615675-024
5. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

-.PART NO, * 표시는 색상 표시 임.

NO.	COLOR
* 0	NATURAL
* 1	RED
* 2	BLUE
* 3	YELLOW
* 4	GRAY
* 5	BLACK
* 6	GREEN

APPROVED

2021-03-31

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

					MATERIAL PBT(V0)		 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH SEE TABLE		
					WIRE RANGE		CLASS HYBRID
					INSULATION		TYPE 060 X 035
	ECO-1907-487근거 도면변경	SMG KSH	KHG	'19.07.31	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG635955-*10
	ECO-1906-144 근거 도면변경	SMG KSH	KHG	'19.06.27			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE		
DR.	SMG '19.06.27	CHK.		PSH '19.06.27			
CHK.	KSH '19.06.27	APP.		KHG '19.06.27	HYBRID 10P REAR HOLDER		

2	ECO-1907-487근거 도면변경	SMG	KSH	KHG	'19.07.31
1	ECO-1906-144 근거 도면변경	SMG	KSH	KHG	'19.06.27
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.	SMG '19.06.27	CHK.	PSH	'19.06.27	
CHK.	KSH '19.06.27	APP.	KHG	'19.06.27	