

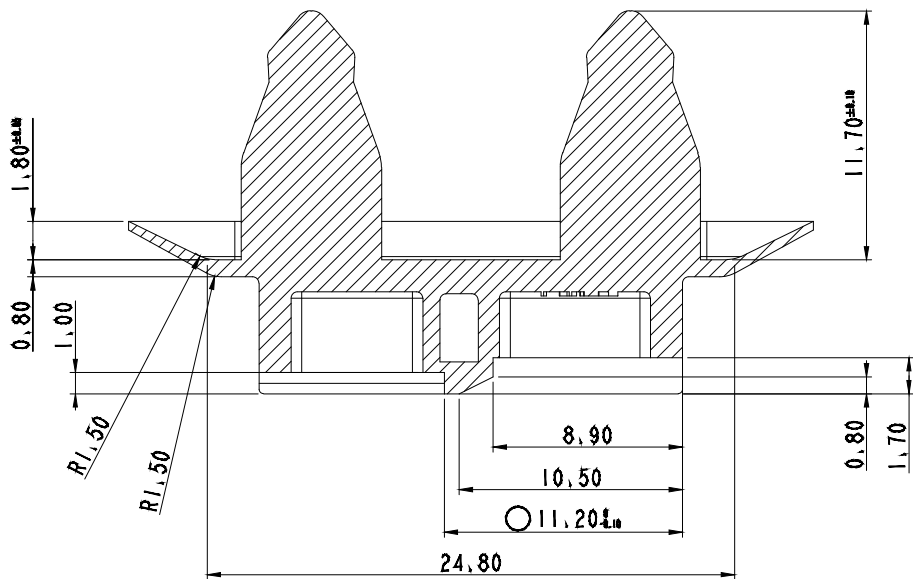
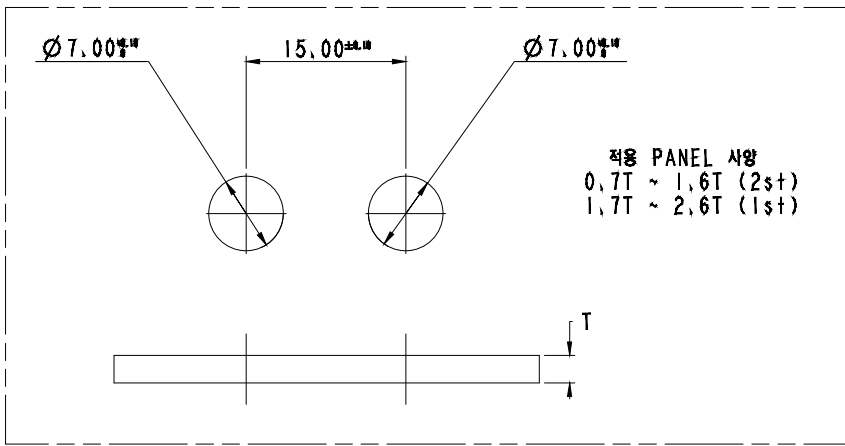


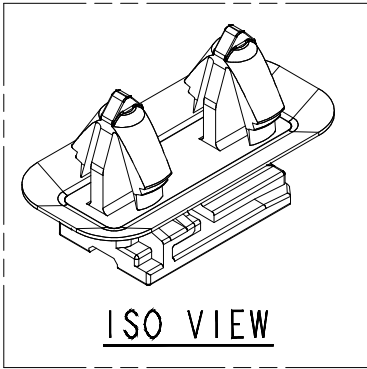

SECTION A-A
SCALE 4/1

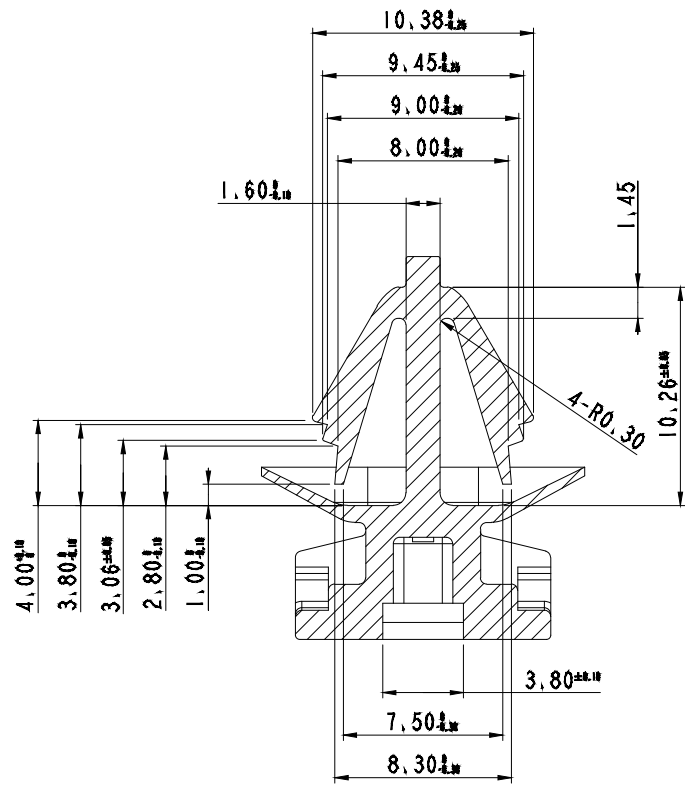





SECTION B-B
SCALE 4/1

- 주 기
1. 지시하지 않은 반경 R은 0.3로 한다.
2. 지시하지 않은 도파기 C는 0.3으로 한다.
3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
4. KET 문자 : 기울기 15° (H); 0.1~0.2, SIZE; 2.0
CAVITY NO. : 기울기 0° (H); 0.1~0.2, SIZE; 2.0
5. HOUSING 표면 부식 사양: KDP-6A
6. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
7. ○표시 치수는 중요 관리 항목으로 대외 측정 진행 할것,
NOTE
1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
4. KET MARK : TAPER 15° (H); 0.1~0.2, SIZE; 2.0
CAVITY NO. : TAPER 0° (H); 0.1~0.2, SIZE; 2.0
5. HOUSING ETCHING SPEC : KDP-6A
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
7. ○CRITICAL DIMENSION

NO.	MATERIAL	COLOR
0	△PA66 103HSL	NATURAL
1		RED
2		BLUE
22		JADE
3		YELLOW
4		GRAY
42		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
62		DARK GREEN
7		BROWN
61		LIGHT GREEN
9		MAGENTA
11		ORANGE

GENERAL TOLERANCE (HOUSING)							
	10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT
Ⓐ	±0.15	±0.2	±0.3	±0.5	±0.75	±30°	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1
C	±0.3	±0.5	±0.8	±1.4	±2.0	±30°	0.15

USED ON

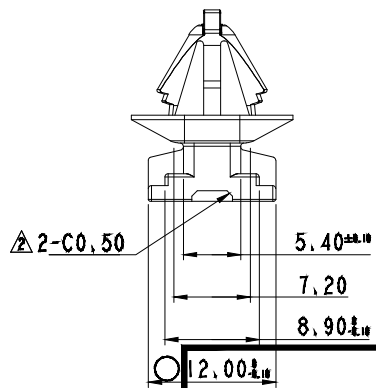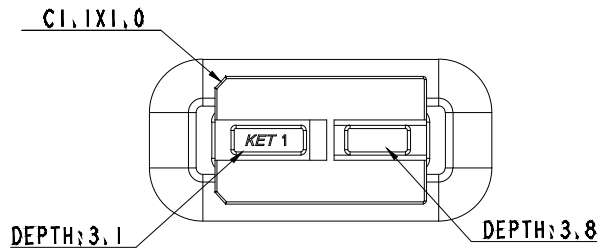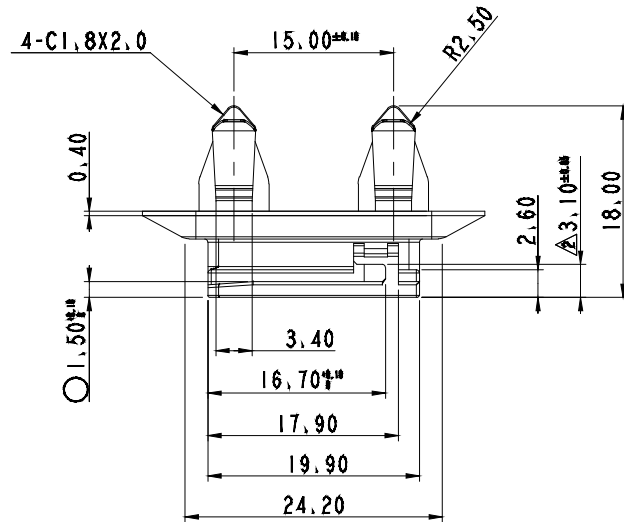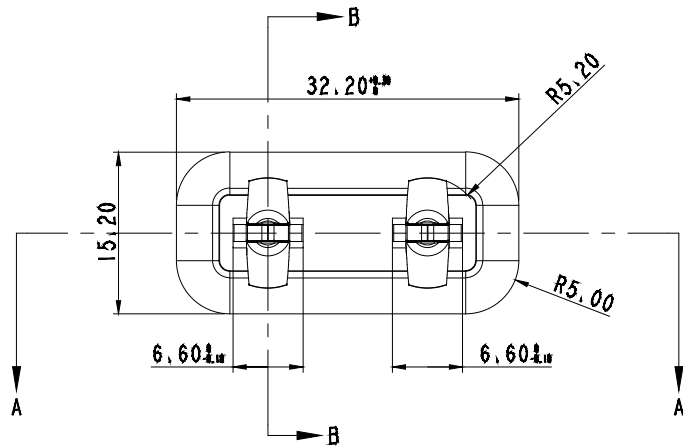

APPROVED

2025-08-19

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

25331

DIE NO

ISSUE MARK

				MATERIAL	SEE TABLE	KET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
				FINISH	SEE TABLE		
				WIRE RANGE	-	CLASS	-
				INSULATION	-	TYPE	-
LTR REVISION RECORD				DR, YCH 2019.03.05	CHK, WDH 2019.03.05	DATE	SCALE 2/1
CHK,				APP, CNS 2019.03.05	PART-NAME		
				060110 WP 26P DOUBLE CLIP			MG635958
				DESIGN REVISION NO. 0			