
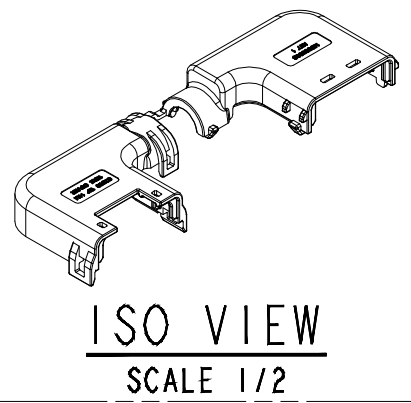


SECTION A-A

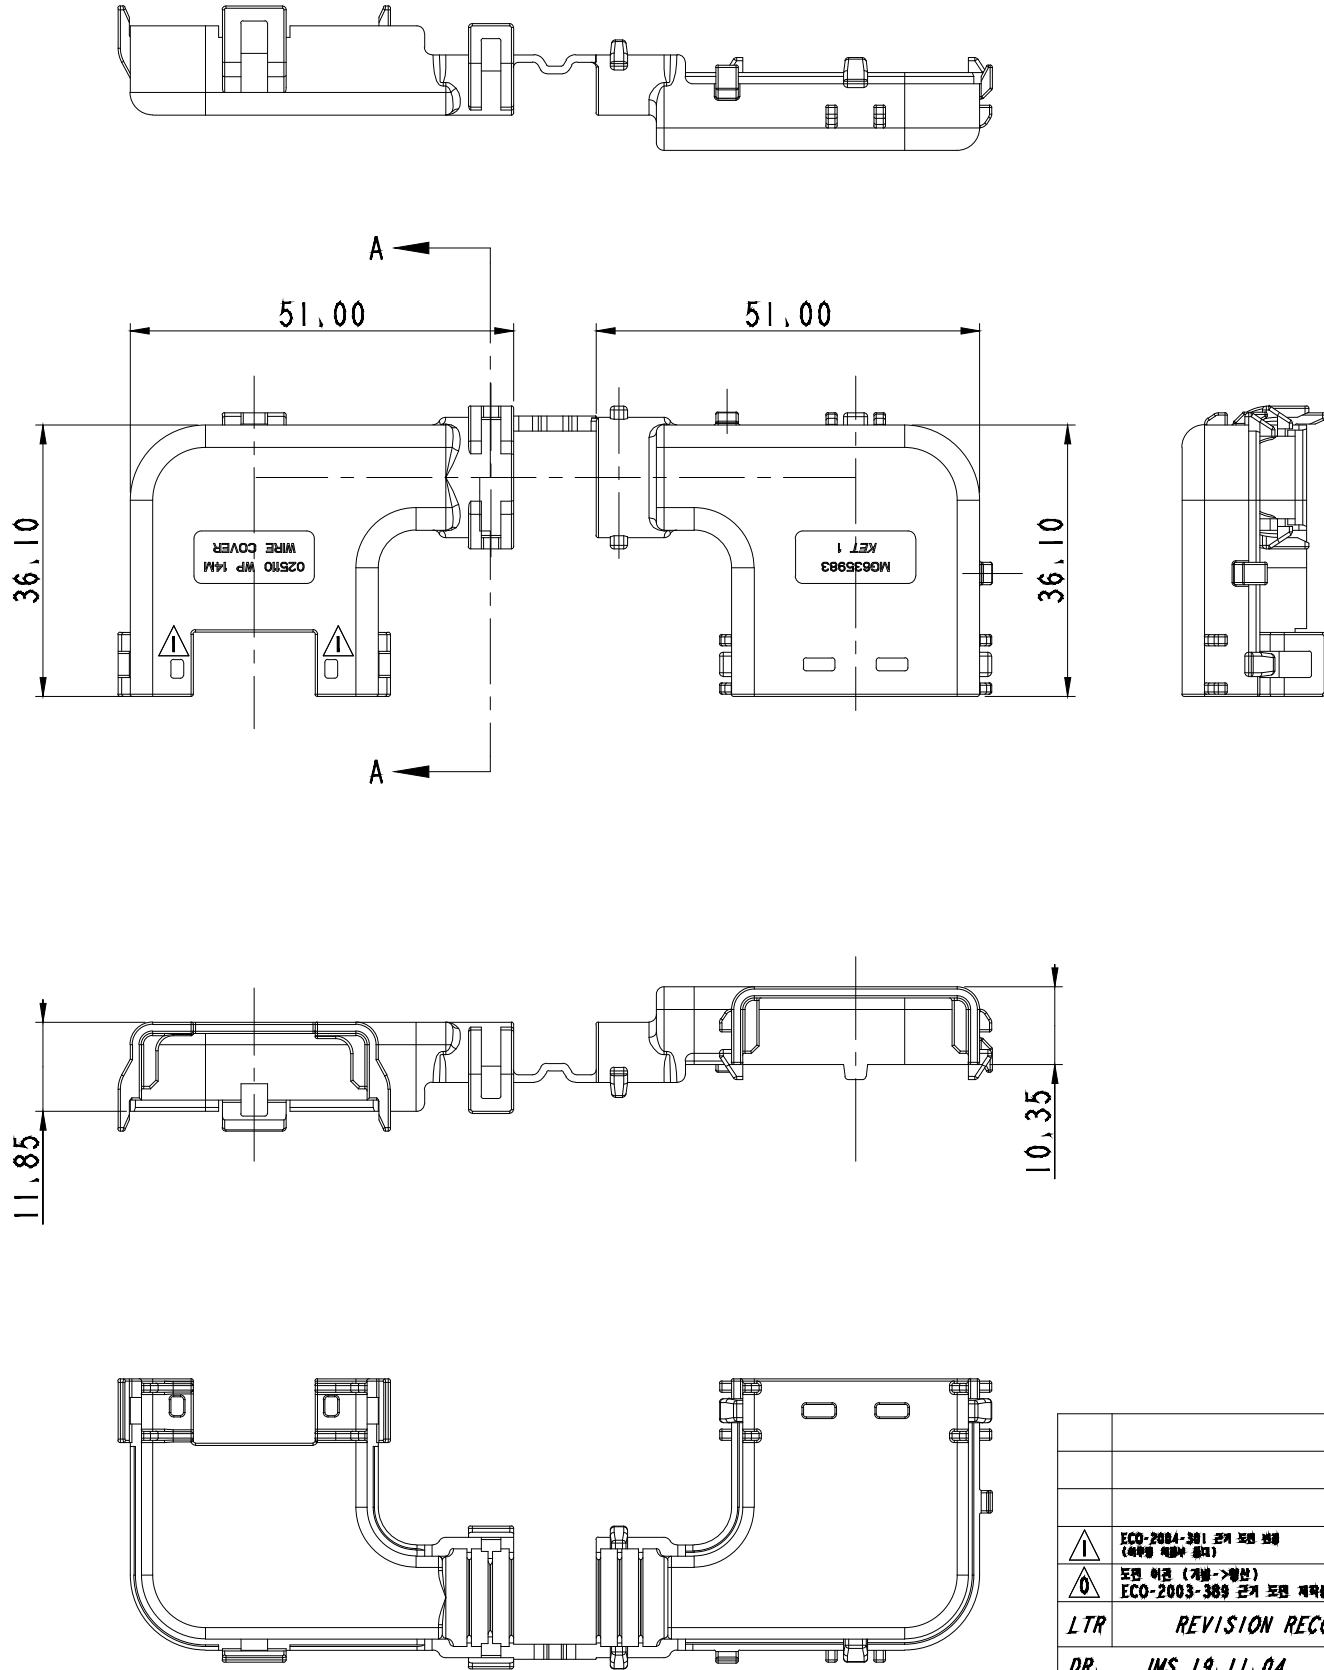

GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

- 주
1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
2. 적용 MALE ASSY: MG677533
적용 CORRUGATED TUBE : Ø9
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,
PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다,

- NOTE
1. MUST BE FREE OF FLASH, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE MALE ASSY: MG677533
APPLICABLE CORRUGATED TUBE : Ø9
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,
CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHOULD
NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE
& RoHS REGULATION.

NO.	MATERIAL	COLOR
0	PP	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

ISSUE MARK

				MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD. 2024-04-12
				FINISH	SEE TABLE	
				WIRE RANGE	-	
				INSULATION	-	CLASS 025 /
				TOLERANCE EXCEPT AS NOTED	SEE TABLE	TYPE WIRE COVER
				SCALE	1/1	PART NO. MG635983
				PART_NAME	025110 WP 14M WIRE COVER	
				DR. JMS 19, 11, 04	CHK.	
				CHK. AJH 19, 11, 04	APP. CMS 19, 11, 04	