


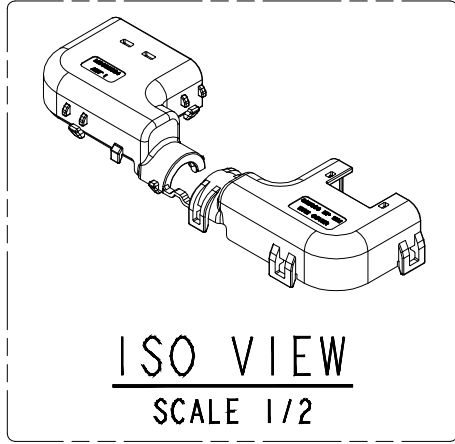
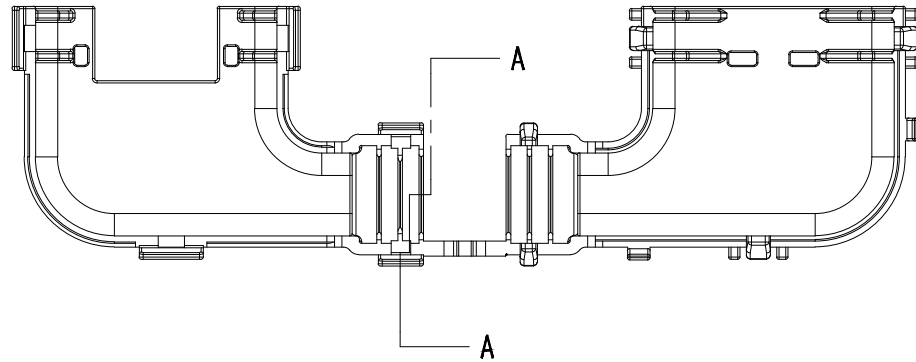
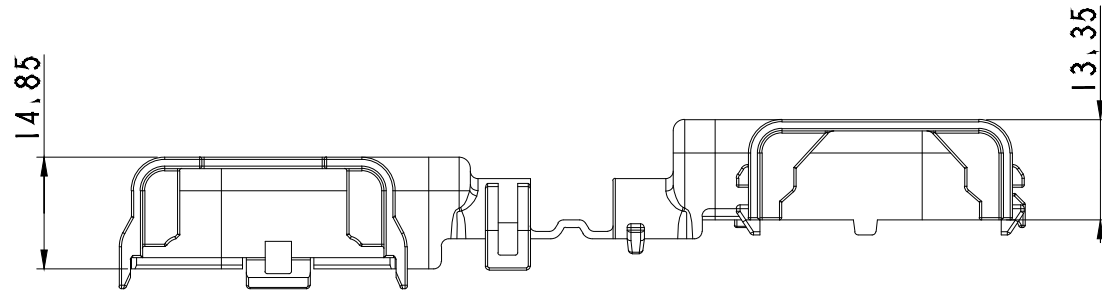


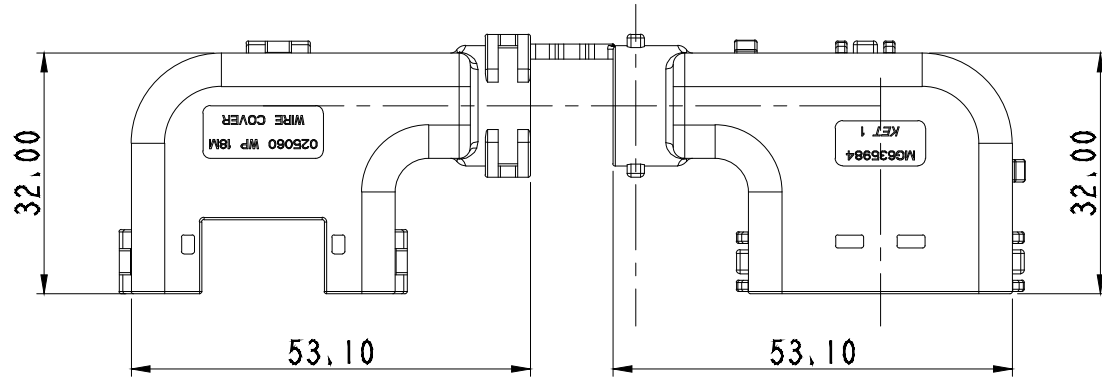


ISO VIEW
SCALE 1/2



GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

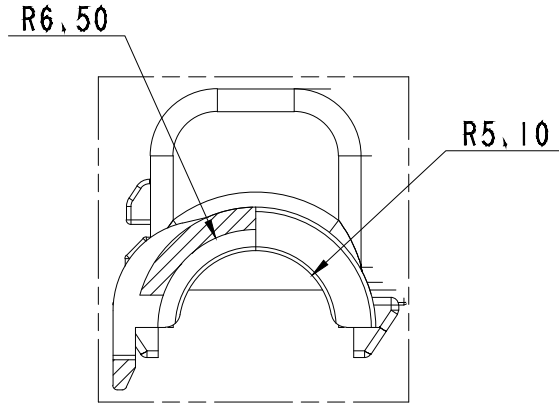

SECTION A-A
SCALE 2/1



NO.	MATERIAL	COLOR
0	PP	NATURAL
1		RED
11		ORANGE
2		BLUE
22		JADE
3		YELLOW
4		GRAY
41		LIGHT GRAY
42		DARK GRAY
* 5		BLACK
61		LIGHT GREEN
62		DARK GREEN
7		BROWN
9		MAGENTA

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
2. 적용 MALE ASSY: MG646357
적용 CORRUGATED TUBE : Ø9
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,

NOTE

1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE MALE ASSY: MG646357
APPLICABLE CORRUGATED TUBE : Ø9
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHOULD NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION,

APPROVED

2021-04-02

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

				MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
				FINISH	SEE TABLE	
				WIRE RANGE	-	
				INSULATION	-	CLASS 025 / 060
				TOLERANCE EXCEPT AS NOTED	SEE TABLE	TYPE WIRE COVER
				SCALE	1/1	PART NO. MG635984
				PART_NAME	025060 WP 18M WIRE COVER	

	도면 이관 (개발->생산) ECO-2007-032 근거 도면 제작됨	KJC	AJH	CMS	20.07.02
	LTR REVISION RECORD	DR.	CHK.	APP.	DATE
	DR. KJC 19.11.04	CHK.			
CHK. AJH 19.11.04		APP. CMS 19.11.04			