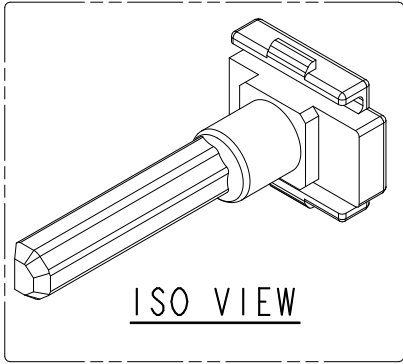


SECTION A-A

GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

- 주거
1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
 2. 적용 HOUSING: MG646290
 3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- NOTE
1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 2. APPLICABLE HOUSING: MG646290
 3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	MATERIAL	COLOR
0	PBT+GF30	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
* 4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

				MATERIAL	SEE TABLE	 KET ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD.
				FINISH	SEE TABLE	
				WIRE RANGE	-	
				INSULATION	-	
0 도면 이름(제명->명사) ECO-2002-238 근거 도면 제작명 LJJ AJH CMS 20.02.19				REVISION RECORD	DR. CHK. APP. DATE	TOLERANCE EXCEPT AS NOTED
DR. KTK 2019.07.26				CHK. LJJ 2019.07.26		SCALE 5/1
CHK. AJH 2019.07.26				APP. CMS 2019.07.26		PART NO. MG635985
				PART-NAME		025 WP 6P JOINT SPACER

ISSUE MARK