
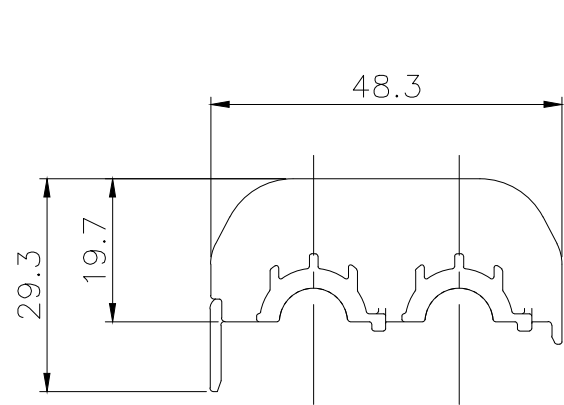
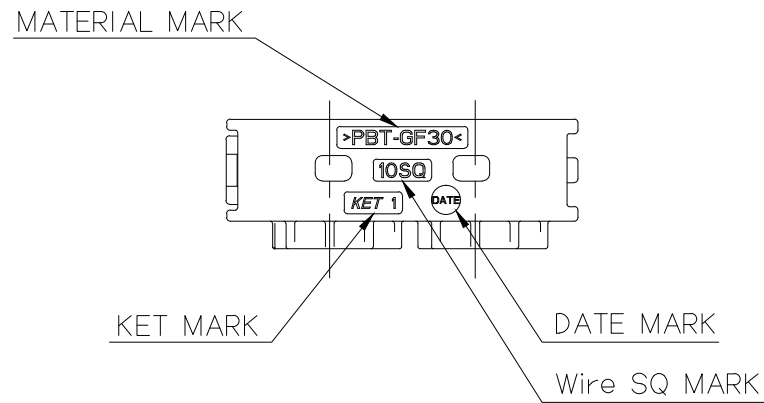


NOTE

1. MUST BE FREE OF FLASH AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE CONNECTOR:MG657178,9-11
3. 10 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) SHOULD NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.3	±0.5	±0.8	±1.4	±2.0	±30'	0.15	

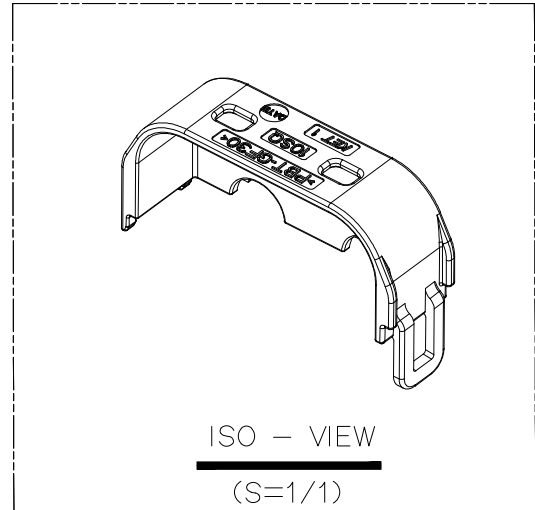

NO.	MATERIAL	COLOR
0	PBT-GF30	NATURAL
1		RED
* 2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE



ISSUE MARK

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		SEE TABLE		
	품명 변경(ECO-2010-376)	LJY	YSW	SSH	3.NOV'20	WIRE RANGE		10SQ	CLASS	HVSC 1500
	RELEASED	KYC	KSI	OHH	13.MAY'20	INSULATION			TYPE	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED		SCALE	PART NO.	
						SEE TABLE		1/1	MG636031-2	
DR.	Y.C KIM	CHK.								
CHK.	S.I KANG	APP.				H.H.OH		 HVSC 1500 2M WIRE REAR HOLDER (10SQ)		