
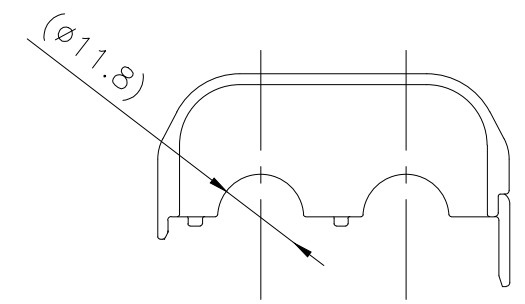
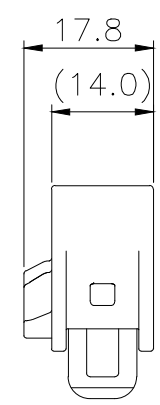
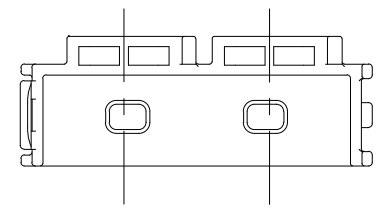
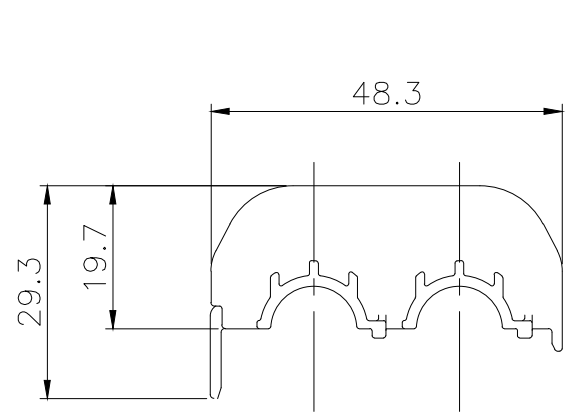


PART NO. MG636032-5

CUSTOMER DRAWING

(DIMENSIONS IN MM)

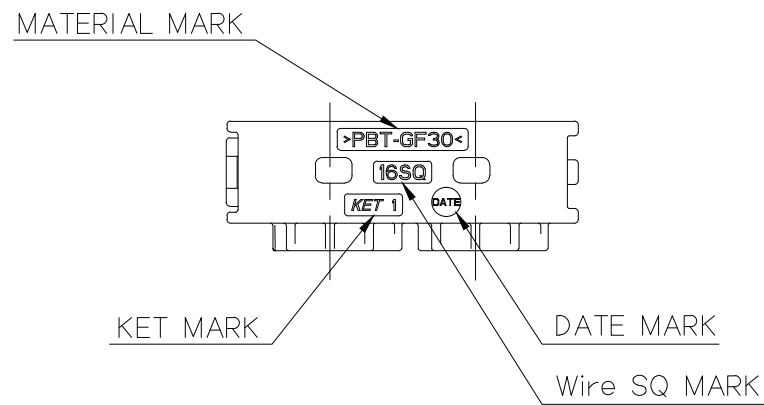


NOTE

1. MUST BE FREE OF FLASH AND IMPERFECTION THAT AFFECT FUNCTION.

2. APPLICABLE CONNECTOR:MG657178,9-11

3. 10 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) SHOULD NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.3	±0.5	±0.8	±1.4	±2.0	±30'	0.15	

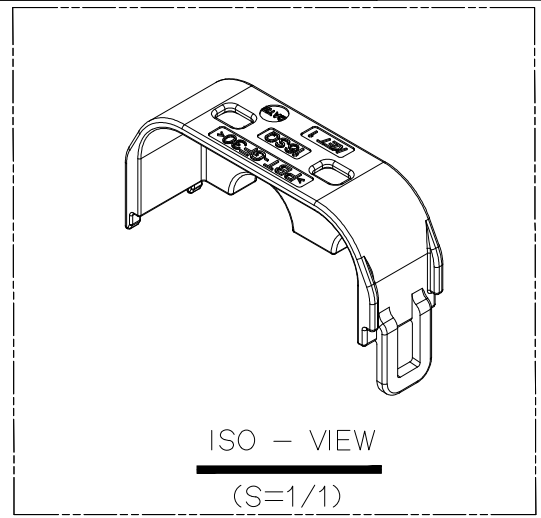

NO.	MATERIAL	COLOR
0	PBT-GF30	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE



ISSUE MARK

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.					
						FINISH		SEE TABLE						
						WIRE RANGE		16SQ		CLASS	HVSC 1500			
	품명 변경(ECO-2010-376)		LJY	YSW	SSH	3.NOV'20	INSULATION				TYPE			
	RELEASED		KYC	KSI	OHH	13.MAY'20	TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE	1/1	PART NO.		MG636032-5
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	PART NAME		 HVSC 1500 2M WIRE REAR HOLDER (16SQ)					
DR.	Y.C KIM		CHK.											
CHK.	S.I KANG		APP.		H.H.OH									