

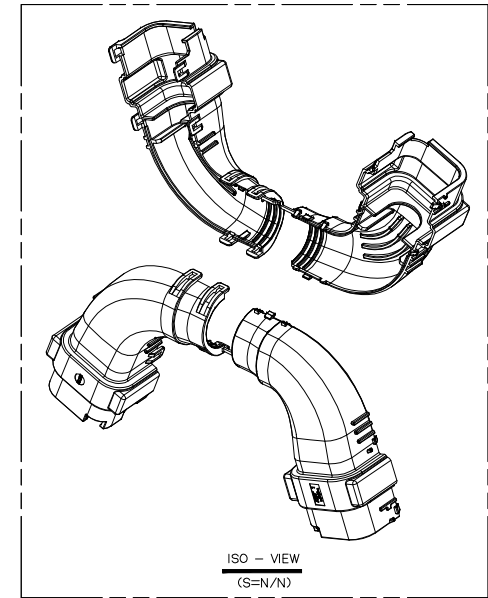
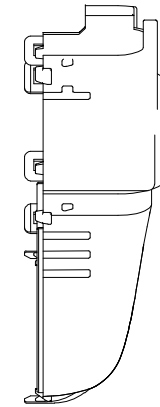
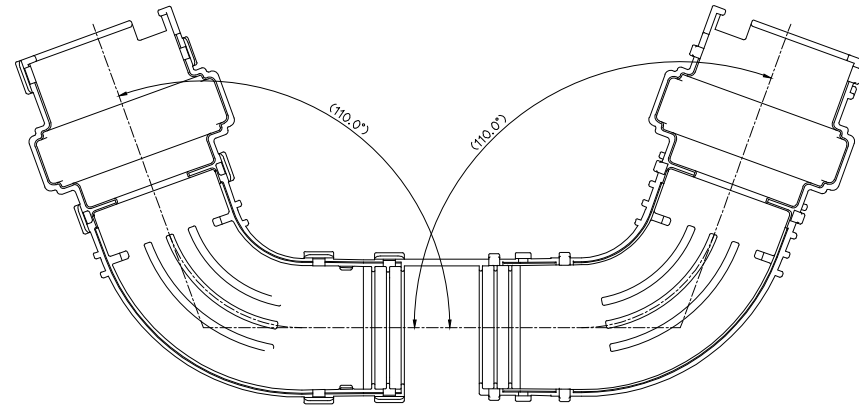
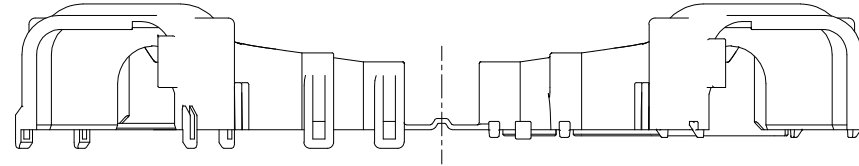


GENERAL TOLERANCE						
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT
±0.3	±0.5	±0.8	±1.4	±2.0	±30'	0.15

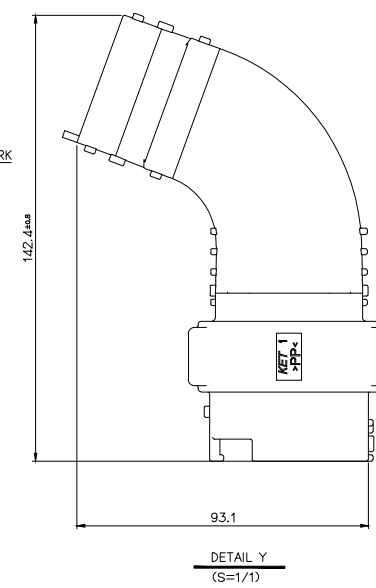

NO.	MATERIAL	COLOR
0	E.P	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8	LIGHT GREEN	
9	MAGENTA	
11	ORANGE	

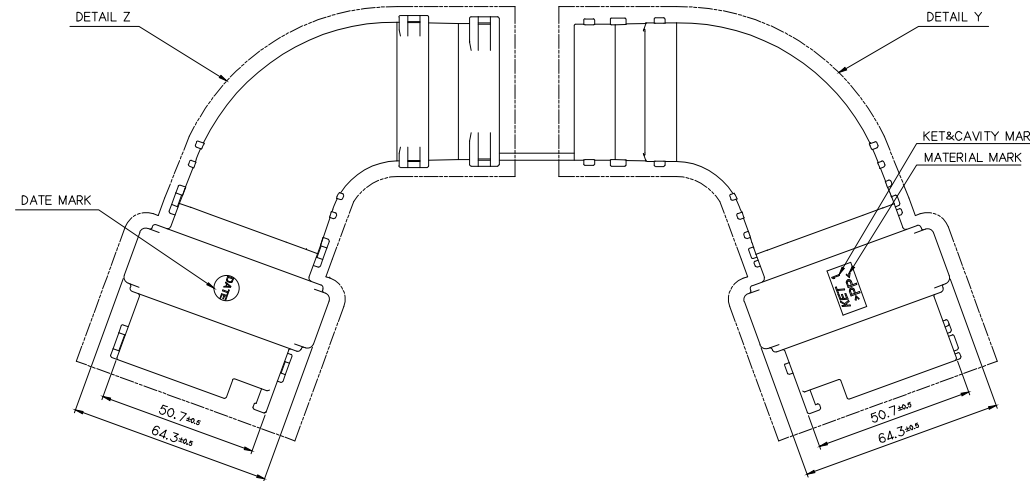

NOTE

1. MUST BE FREE OF FLASH AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE CONNECTOR: MQ657140-11
3. 10 HAZARDOUS SUBSTANCES IN PARTS (Pb, Hg, Cd, Cr+6, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



						MATERIAL		SEE NOTE	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH		SEE NOTE	
						WIRE RANGE		CLASS	
						INSULATION		TYPE	
 RELEASED		 JIS		 DIN		 28420			
 LTR		 REVISION RECORD		 CHK		 DATE			
 DL		 J.W.KANG		 CHK		 SCALE		 PART NO.	
 C.K. YEO		 APP.		 H.H. OH		 PART NAME		 M636035-2	
						HYVC 2800 2F PLUG SHIELD GUIDE HOUSING			