




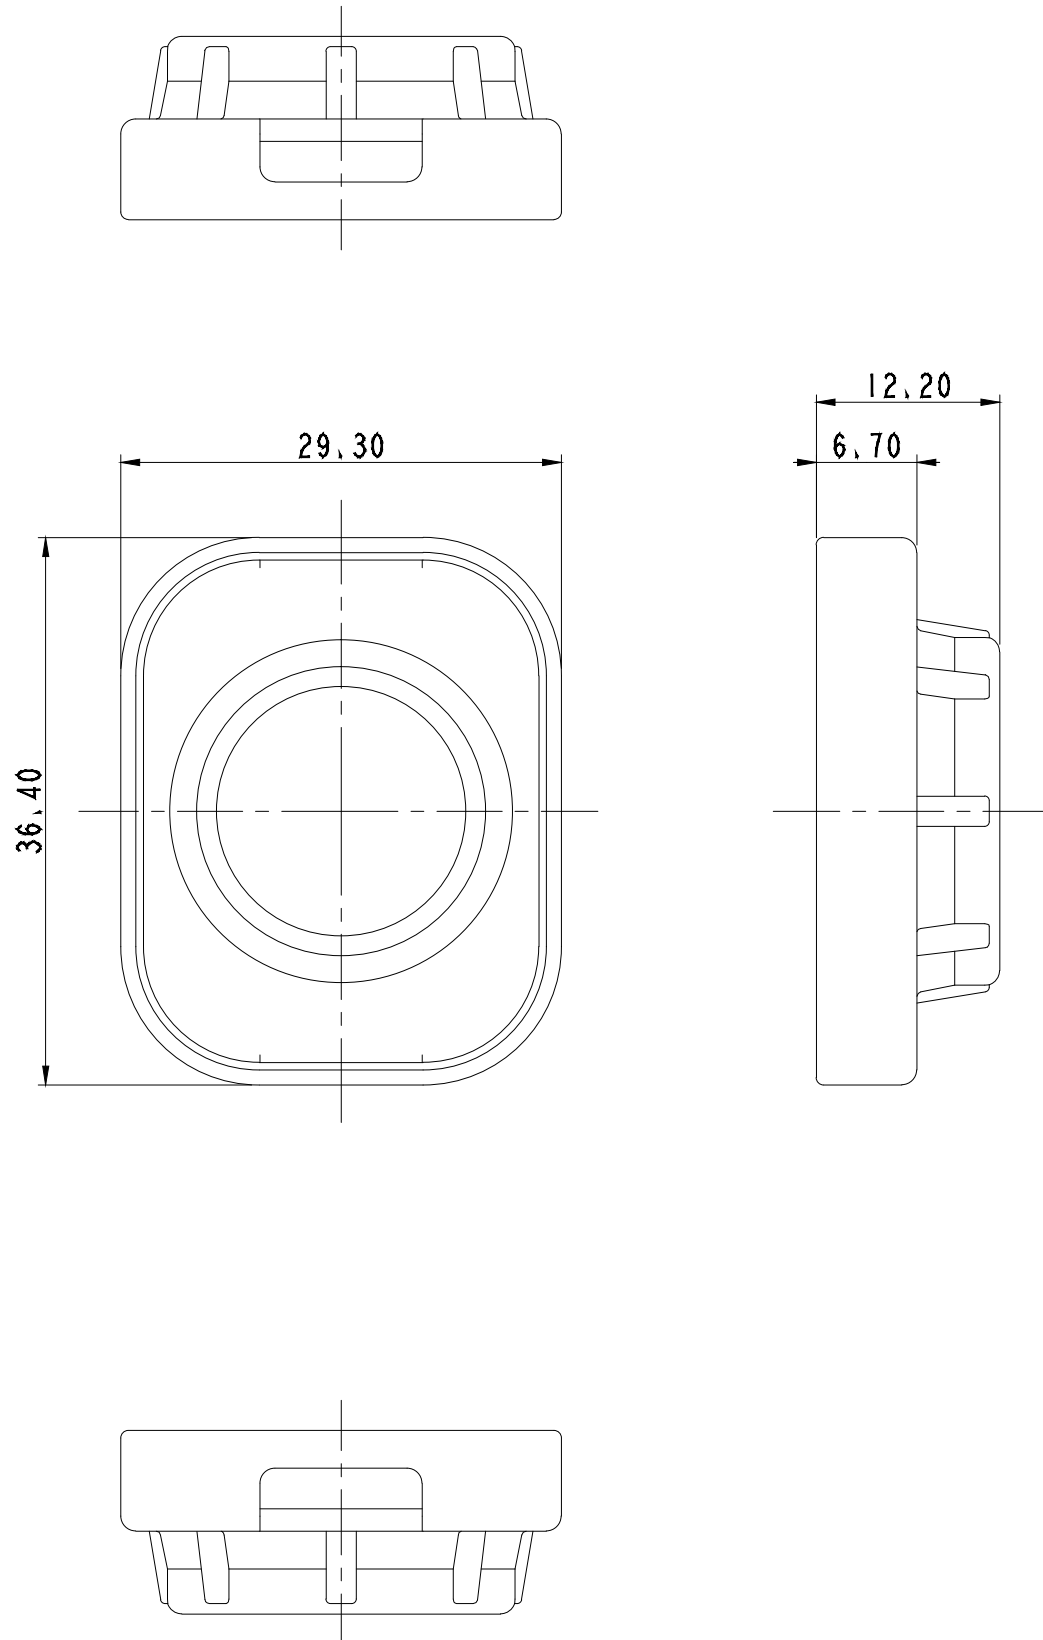

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.3	±0.5	±0.8	±1.4	±2.0	±30'	0.15	

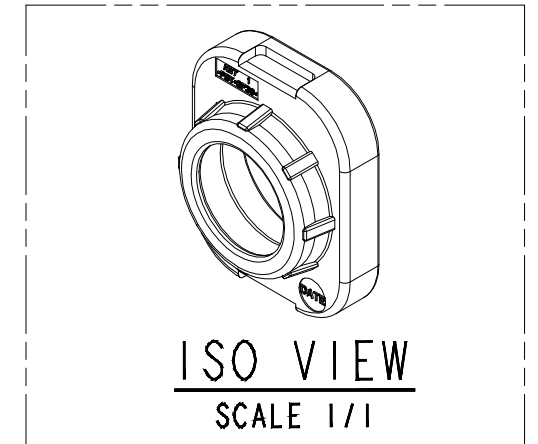

NO.	MATERIAL	COLOR
0	PBT-GF30	NATURAL
1		RED
* 2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

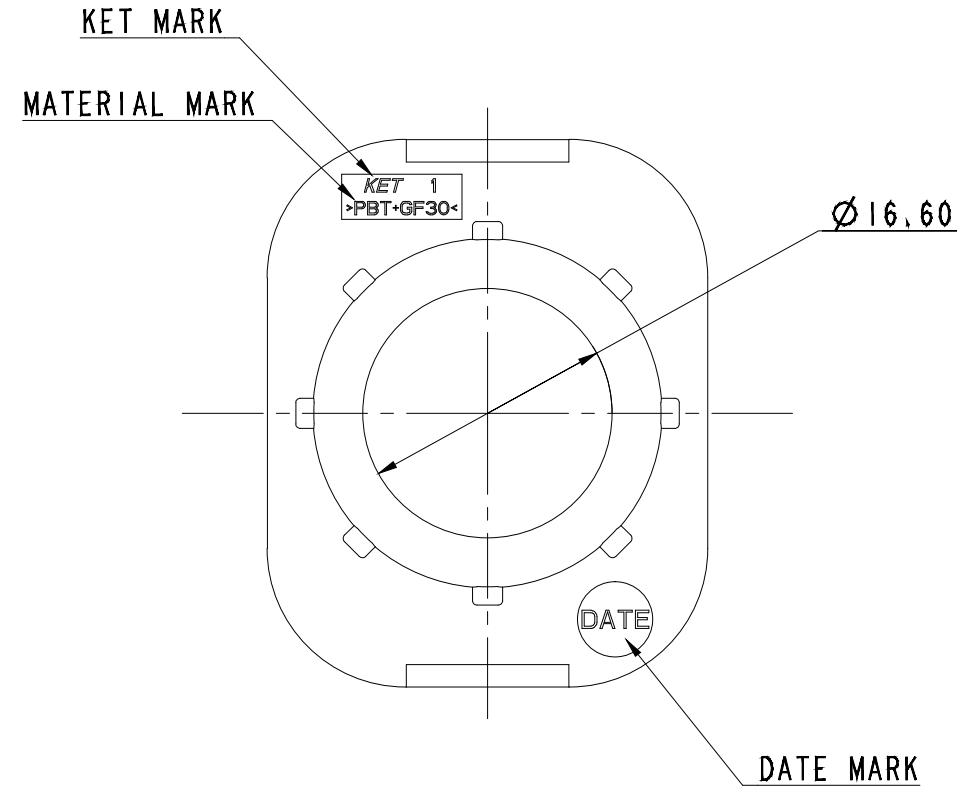

NOTE

- MUST BE FREE OF FLASH AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE CONNECTOR ; MG657140-11, MG657146~7-11
- 10 HAZARDOUS SUBSTANCES IN PARTS (Pb, Hg, Cd, Cr+6, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



ISSUE MARK

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH SEE TABLE			
						WIRE RANGE -		CLASS -	
						INSULATION -		TYPE -	
 도면 이관 (개발 -> 양산) (ECO-2105-255)		LCK	WDH	CMS	'21.06.03				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG636037-2
DR, J, W. KANG		CHK,							
CHK, C, K. YEO		APP, H, H. OH				PART_NAME HVSC 2800 2M Plug Wire Rear Holder			

HVSC 2800 2M Plug Wire Rear Holder

DESIGN REVISION NO. 1