





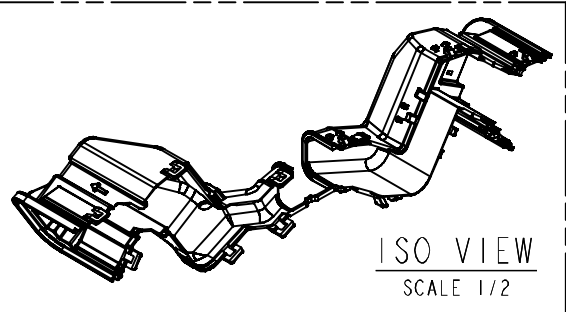


GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

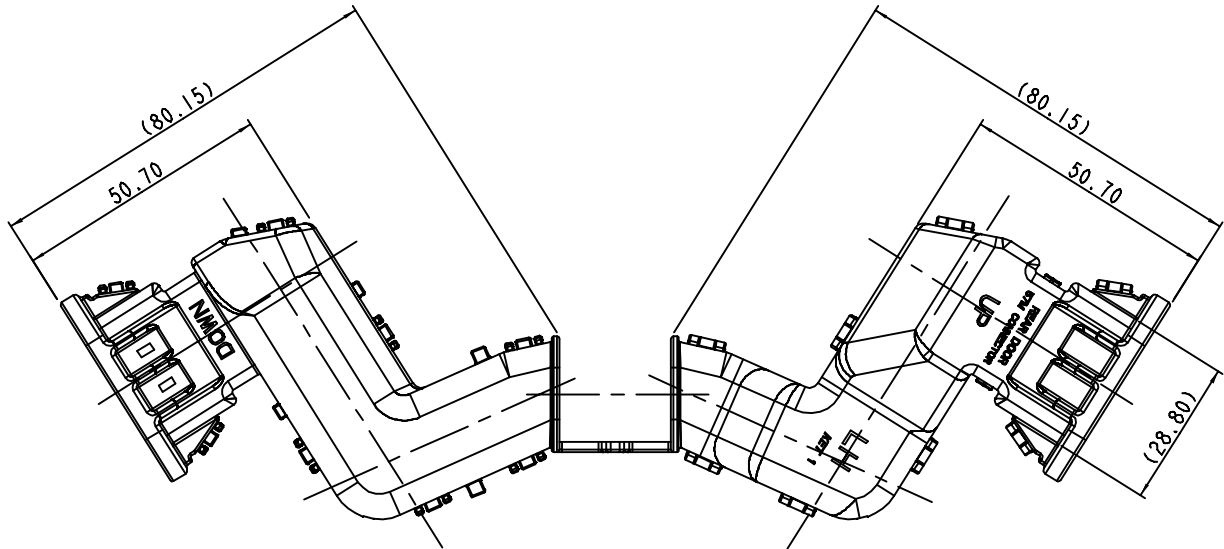


주
1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 MALE ASSY: MG646394
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE
1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE MALE ASSY: MG646394
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHOULD NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

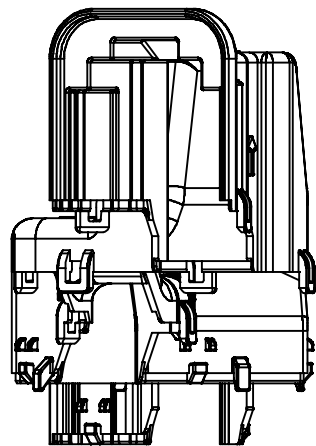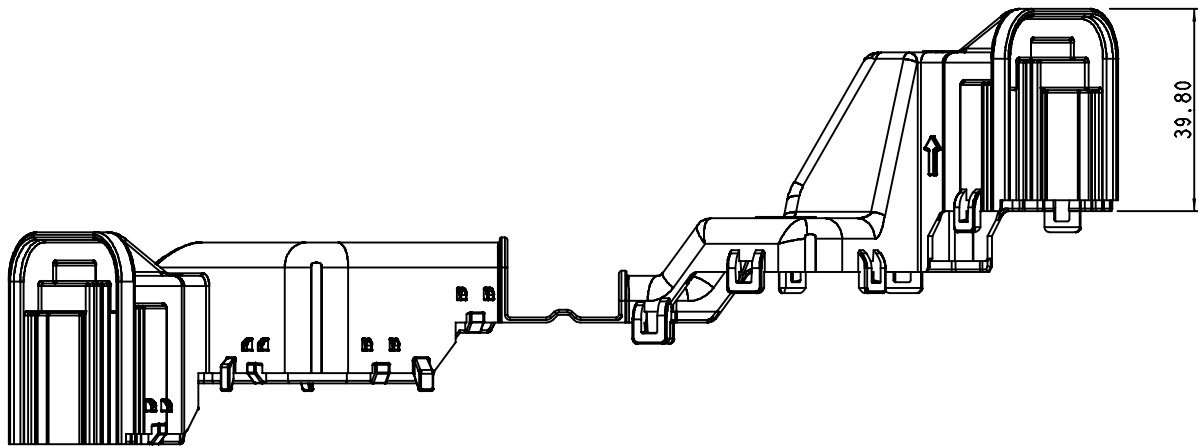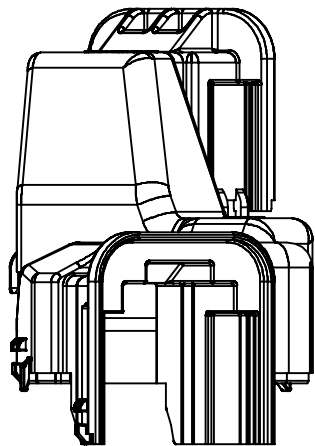

NO.	MATERIAL	COLOR
0	PP	NATURAL
1		RED
11		ORANGE
2		BLUE
22		JADE
3		YELLOW
4		GRAY
41		LIGHT GRAY
42		DARK GRAY
* 5		BLACK
61		LIGHT GREEN
62		DARK GREEN
7		BROWN
9		MAGENTA

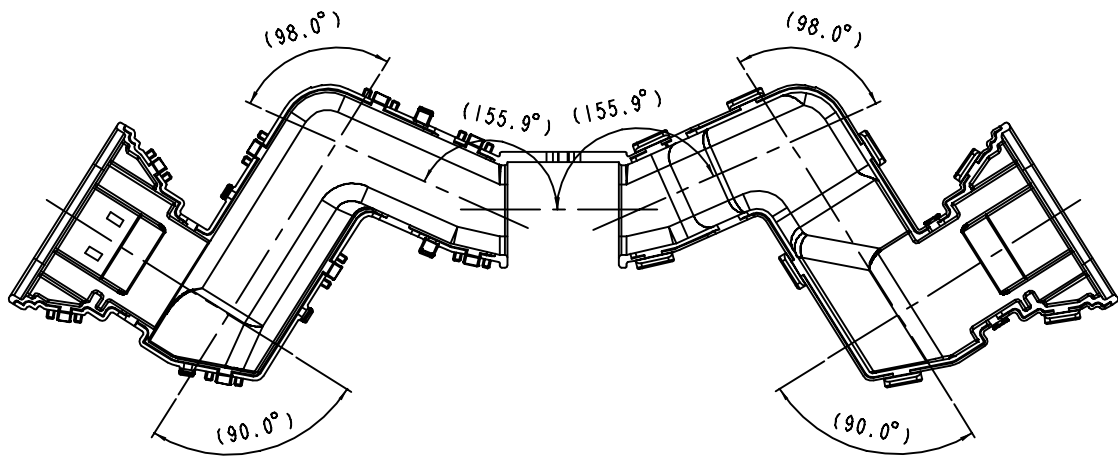

APPROVED
2021-10-20
KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.
ISSUE MARK

		MATERIAL		SEE TABLE	KET KOREA ELECTRIC TERMINAL CO., LTD.
		FINISH		SEE TABLE	
		WIRE RANGE			
		INSULATION			
△ 위험 식별 (재질-방향) ECO-2104-210 근거 포함 계획서		YCH	WDH	CMS	21.04.23
LTR	REVISION RECORD	DR	CHK	APP.	DATE
DR.	JY.K	2020.06.01	CHK.		
CHK.	WDH	2020.06.01	APP.	CMS	2020.06.01
		TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE 1/1
		PART NAME		025060110 FAKRA DOOR 57M REAR COVER_LH	
		PART NO.		MG636046	