
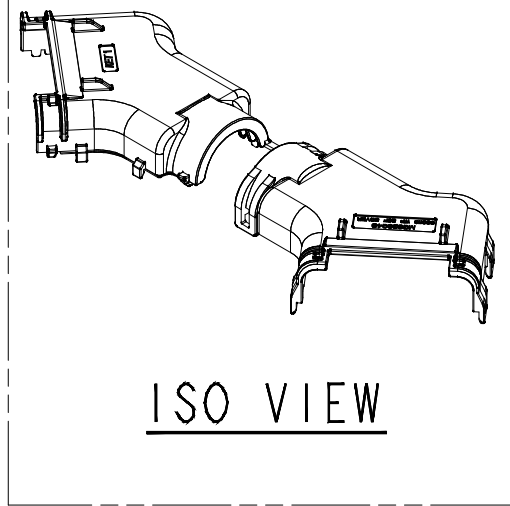
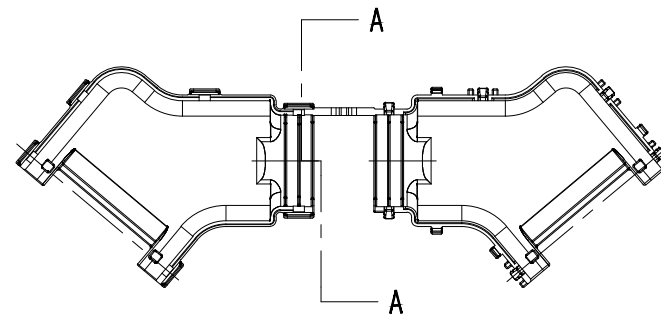
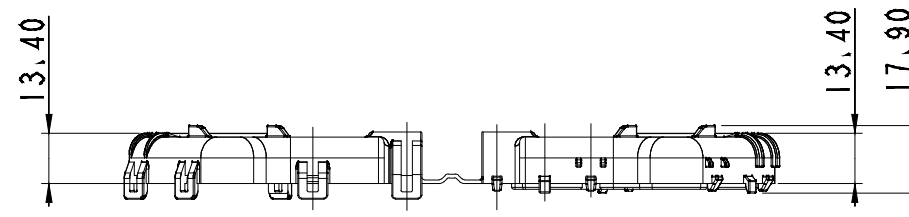


SECTION A-A

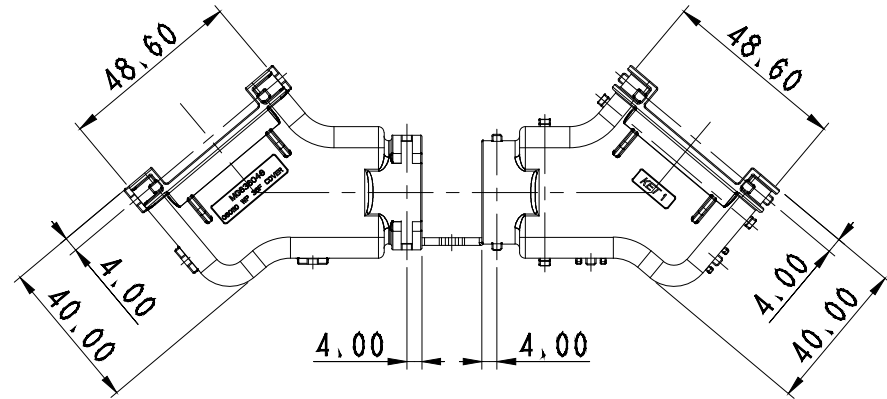

GENERAL TOLERANCE (HOUSING)										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

주기

- 1, 지시하지 않은 반경 R은 0, 3로 한다,
- 2, 지시하지 않은 모파기 C는 0, 3으로 한다,
- 3, 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
- 4, 적용 FEMALE CONNECTOR : MG657000-5
적용 CORRUGATED TUBE : $\phi 19$
- 5, 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE FEMALE CONNECTOR : MG657000-5
APPLICABLE CORRUGATED TUBE : $\phi 19$
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHOULD NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	MATERIAL	COLOR
0	PP	NATURAL
1		RED
11		ORANGE
2		BLUE
22		JADE
3		YELLOW
4		GRAY
41		LIGHT GRAY
42		DARK GRAY
* 5		BLACK
61		LIGHT GREEN
62		DARK GREEN
7	BROWN	
9	MEGENTA	

ISSUE MARK

					MATERIAL	SEE TABLE	KIET ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD. Korea Electric Terminal Co., Ltd.		
					FINISH	SEE TABLE			
					WIRE RANGE	-			
					INSULATION	-			
⚠ 모든 하판 (가방→형상) ECO-2010-212 기타 모든 제작성		KHE	AJH	CMS	20.11.06		CLASS	060/	
LTR	REVISION RECORD	DR,	CHK,	APP,	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/2	PART NO.	MG636048
DR, KHE 20.07.15		CHK, LJJ 20.07.15				PART_NAME			
CHK, AJH 20.07.15		APP, CMS 20.07.15				060110 WP 36F WIRE COVER (50°)			