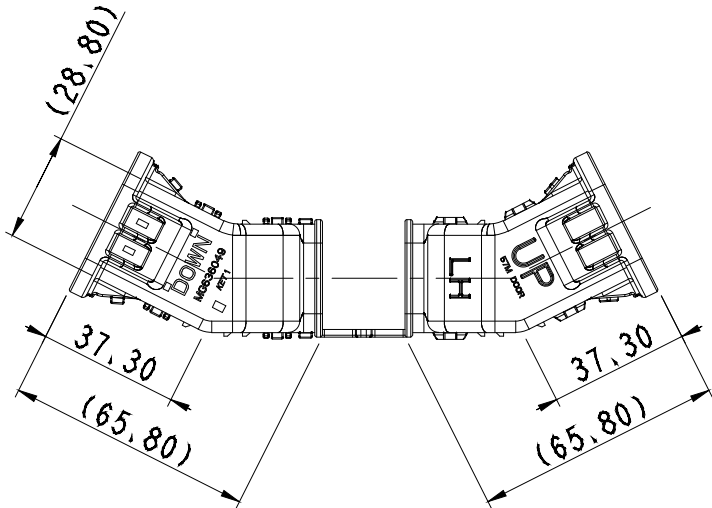
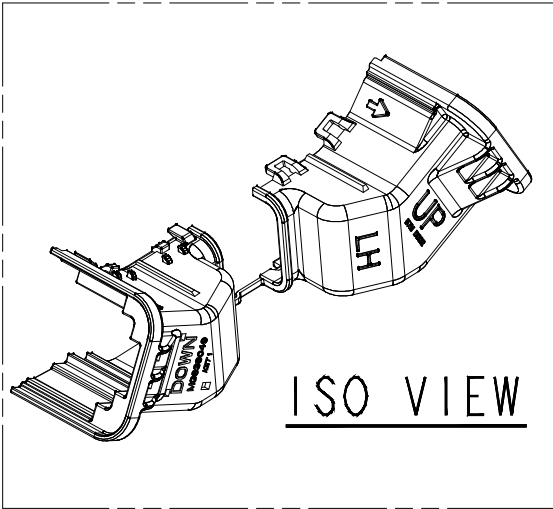


GENERAL TOLERANCE (HOUSING)

10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

주 기

- 1、 기능상 유해한 BURR 및 WELDLINE 등이 없을 것、
- 2、 적용 MALE ASSY: MG646394
- 3、 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다、

NOTE

- 1、 MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- 2、 APPLICABLE MALE ASSY: MG646394
- 3、 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	MATERIAL	COLOR
0	PP	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORAGNE

ISSUE MARK

						MATERIAL	SEE TABLE		KOREA ELECTRIC TERMINAL CO., LTD. 2024-10-22			
						FINISH	SEE TABLE					
						WIRE RANGE	-					
						INSULATION	-					
	도면 확인 (개별->별장) ECO-2104-270 전자 도면 제작실				YCH	WDH	CMS	21,04,23	CLASS	025/060/110 FAKRA		
LTR	REVISION RECORD				DR,	CHK,	APP,	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/2	PART NO.	MG636049
DR, YCH 2020,06,17		CHK,										
CHK, WDH 2020,06,17		APP, CMS 2020,06,17				PART_NAME 025060110 FAKRA DOOR 57M REAR COVER_LH-B						