
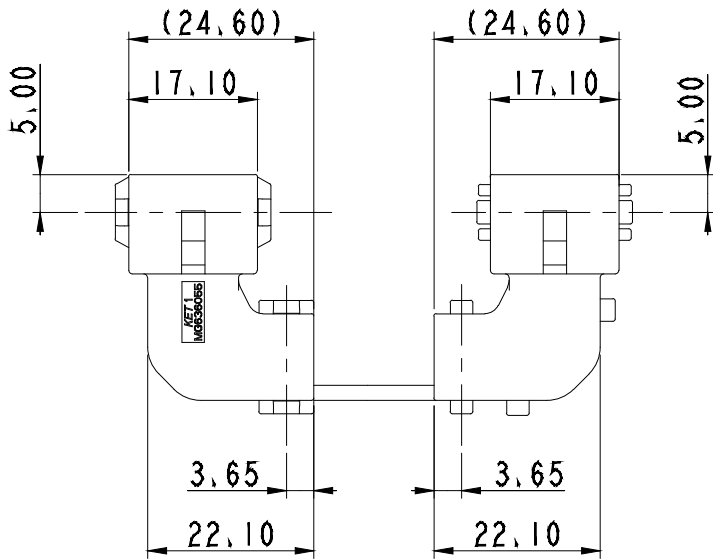

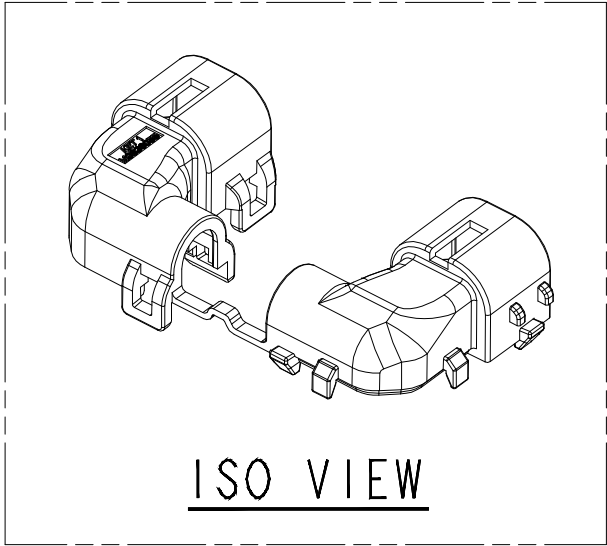
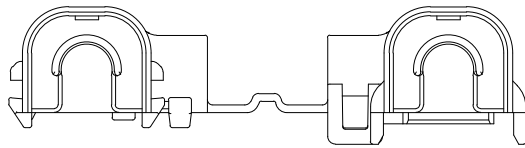


GENERAL TOLERANCE (HOUSING)

10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	USED ON
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.40	±30'	

- 주 기
- 1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
 - 2. 적용 FEMALE ASSY ; MG657138-11, MG657139-11
 - 3. 제품내 함유된 10대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs,DHEP,DBP,BBP,DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,
- NOTE
- 1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION,
 - 2. APPLICABLE CONNT ; MG657138-11, MG657139-11
 - 3. 10 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs,DEHP ,DBP,BBP,DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION,



NO.	MATERIAL	COLOR
0	P P	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
* 11		ORANGE

APPROVED

2021-10-18

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH SEE TABLE				
					WIRE RANGE			CLASS 방수	
					INSULATION			TYPE 280	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 1/1	PART NO.	MG636055-11
DR, KJH 20.07.15		CHK,							
CHK, YSW 20.07.15		APP, SSH 20.07.15				PART_NAME HVSC 280 2F PLUG WIRE COVER			