




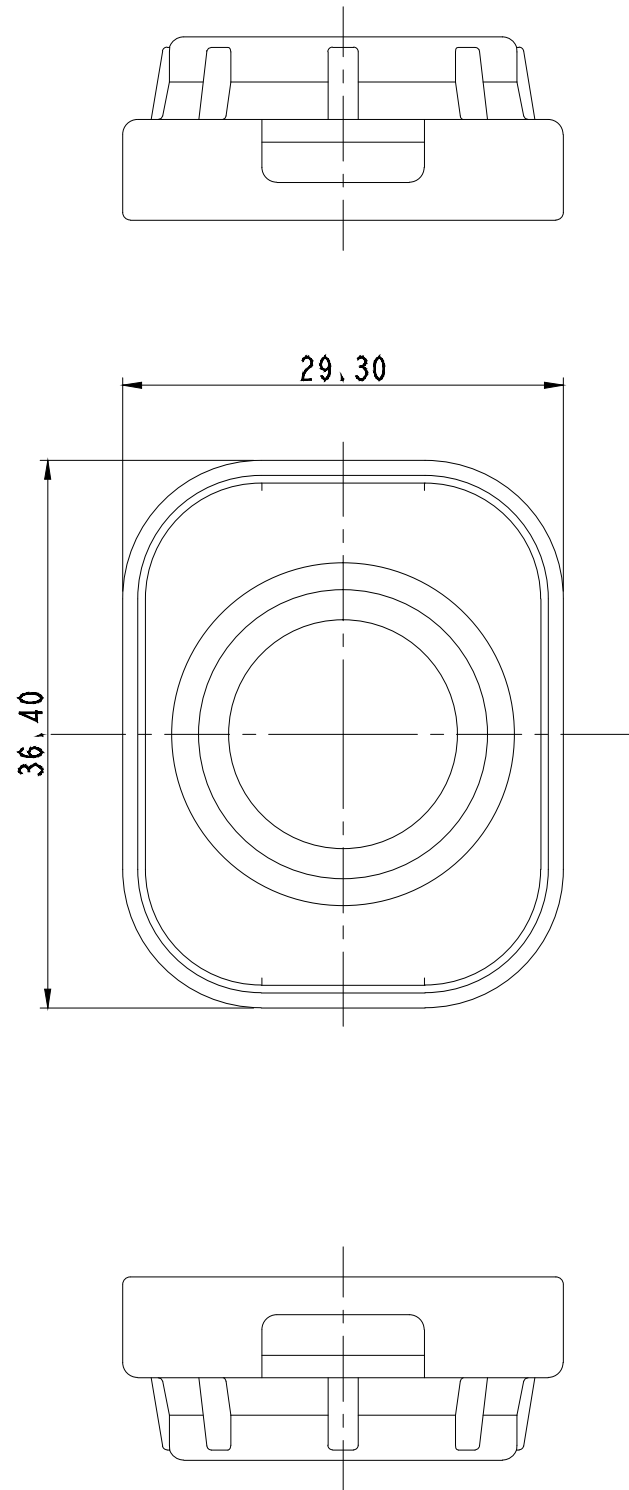

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1	

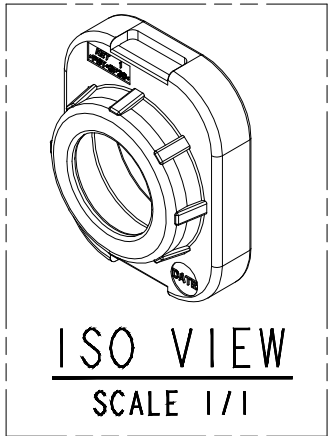

NO.	MATERIAL	COLOR
0	PBT+GF30	NATURAL
1		RED
2		BLUE
22		JADE
3		YELLOW
4		GRAY
42		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
62		DARK GREEN
7		BROWN
61		LIGHT GREEN
9		MAGENTA
11		ORANGE

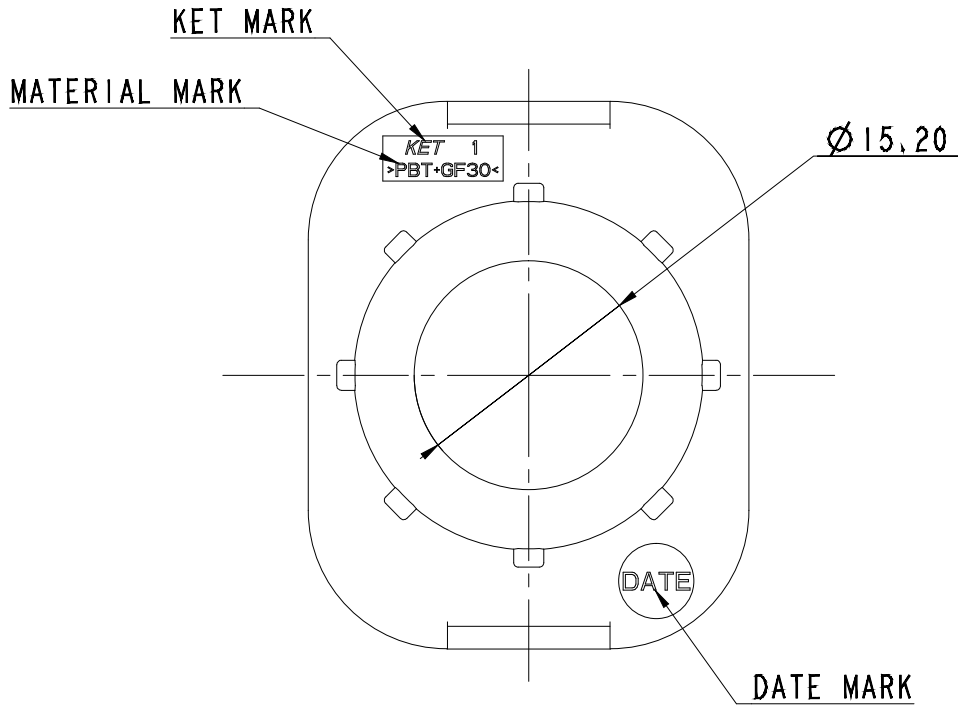

NOTE
1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE CONNECTOR ; MG657207-11, MG657208-11
3. 10 HAZARDOUS SUBSTANCES IN PARTS (Pb, Hg, Cd, Cr+6, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



				MATERIAL	SEE TABLE	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
				FINISH	SEE TABLE		
				WIRE RANGE	70SQ	CLASS	-
				INSULATION	-	TYPE	-
				TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG636059-5
				PART_NAME	HVSC 2800 2M PLUG WIRE REAR HOLDER_70		

				LCK	WDH	CMS	'21.07.16
LTR	REVISION RECORD			DR,	CHK,	APP,	DATE
DR,	LCK 2020.07.20			CHK,	WDH 2020.07.20		
CHK,				APP,	CMS 2020.07.20		