






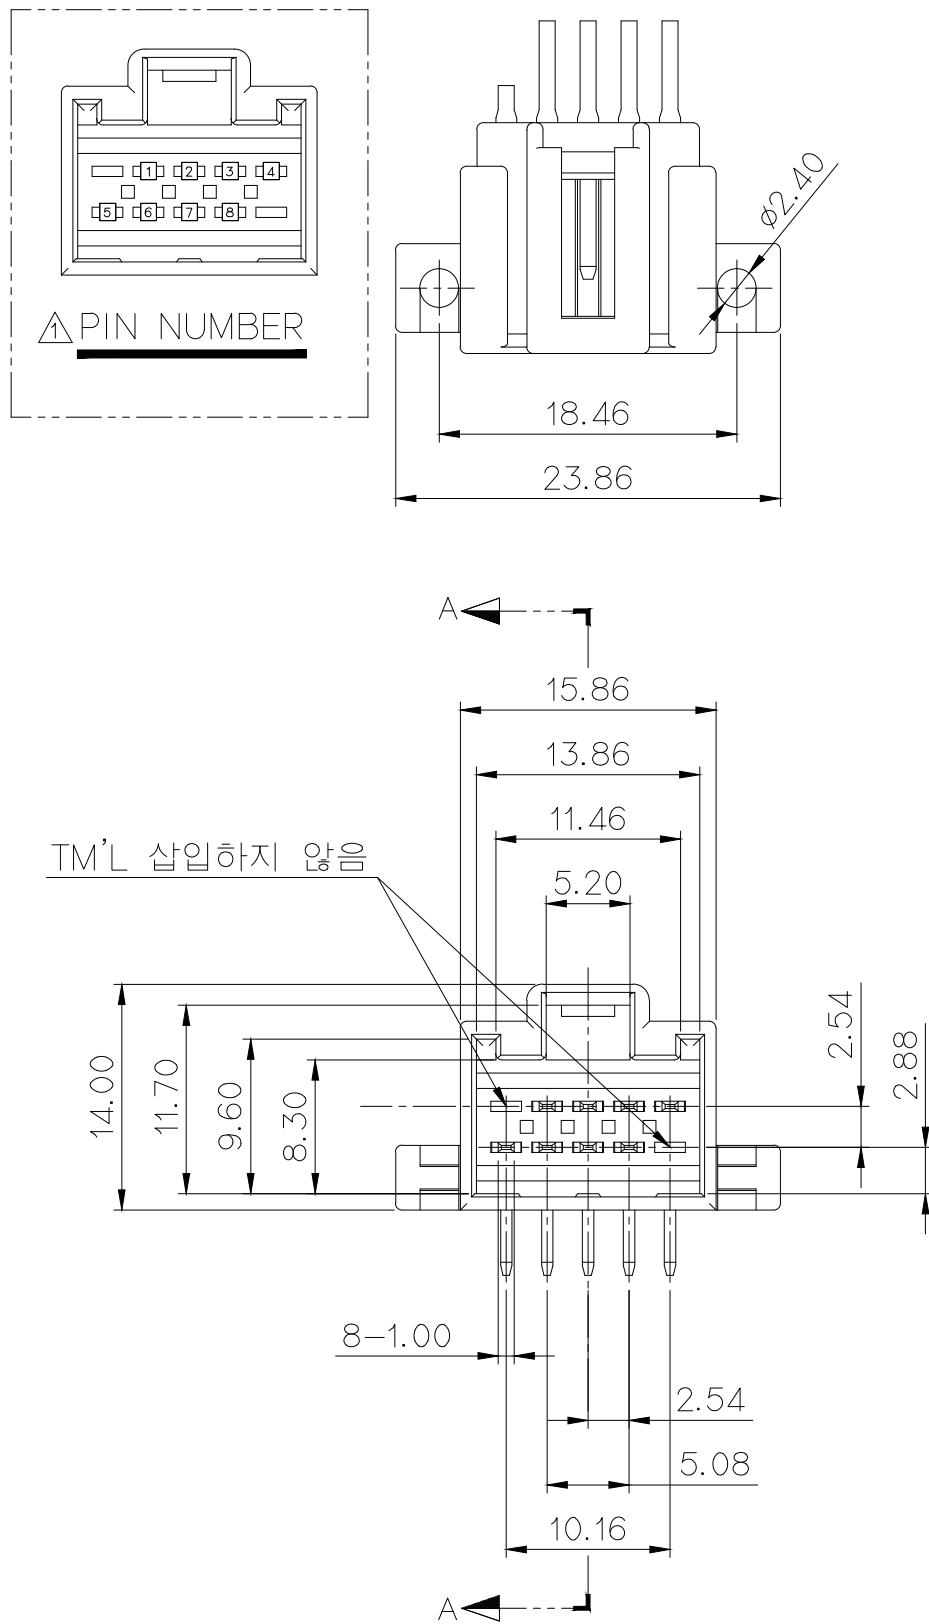


주 기

1. 지시하지 않은 변경 R은 0.4로 한다
2. 기능상 유해한 BURR 및 변형이 없을것.
3. 적용 HOUSING : MG610372
4. 적용 BOLT : M3 일반나사
5. TERMINAL 도금사양 : PRE-TIN + TIN-PLATE(SOLDER부)
Sn 후도금 : 5~10um, 동하지 : 3~5um
6. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

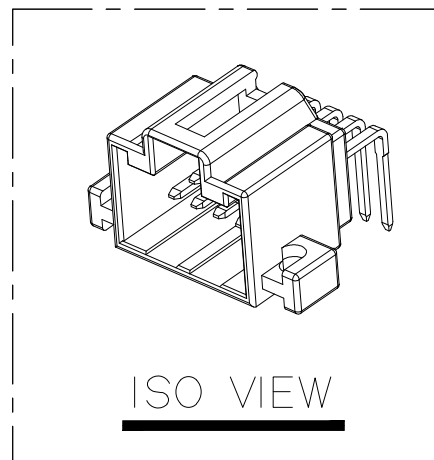

GENERAL TOLERANCE (TERMINAL)						GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

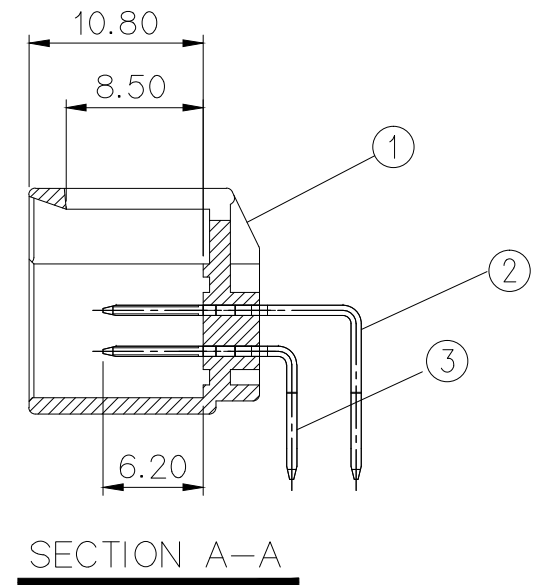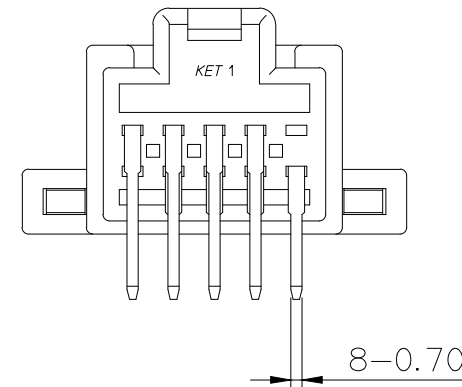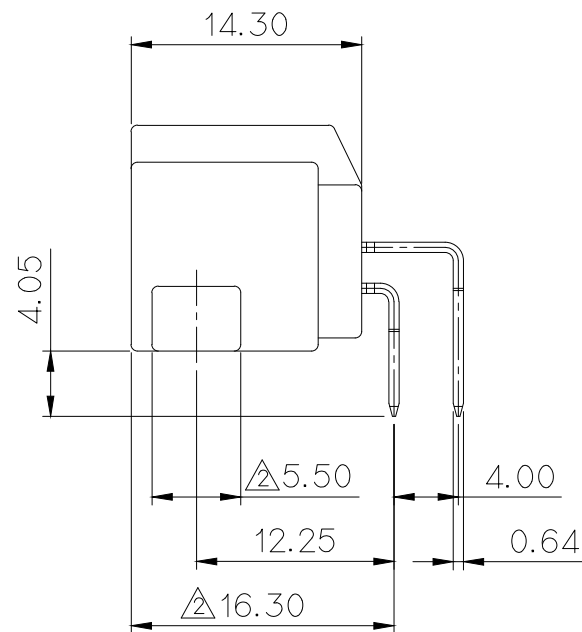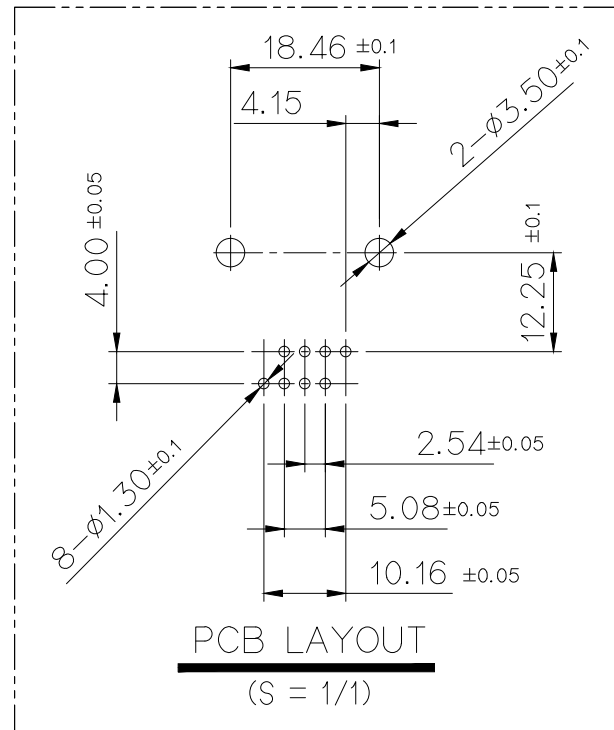

NO.	PART NO.	PART NAME	MATERIAL	FINISH	QT'Y
①	MG670373	SP 10M PCB HS'G (HZT)	PBT	NATURAL	1 EA
②	ST790461-2	SP PCB M TM'L (L)	Copper Alloy	TIN PLATE	4 EA
③	ST790462-2	SP PCB M TM'L (M)	Copper Alloy	TIN PLATE	4 EA

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH		SEE TABLE			
	ECO-1608-240 근거 도면 재작성	YTK	CJH	LSY	'16.08.23	WIRE RANGE		CLASS		SP	
	ECO-1607-192 근거 도면 재작성	KSJ	CJH	LSY	'16.07.14	INSULATION		TYPE			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	PART NO.	MG640374
DR.	H.S.KIM	09.01.19	CHK.	JYS	09.01.19	PART NAME					SP PCB 10M ASSY(8P-HZT)
CHK.	HSB	09.01.19	APP.	KKS	09.01.19						

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL R TO BE 0.4 RADIUS.
2. MUST BE FREE OF BURR AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICATION FEMALE HOUSING : MG610372
4. APPLICABLE MOUNTING SCREW : M3 SCREW
5. TERMINAL PLATING : PRE-TIN + TIN-PLATE(SOLDER AREA)
Sn PLATE : 5~10um, GROUND 'CU PLATE : 3~5um
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.