


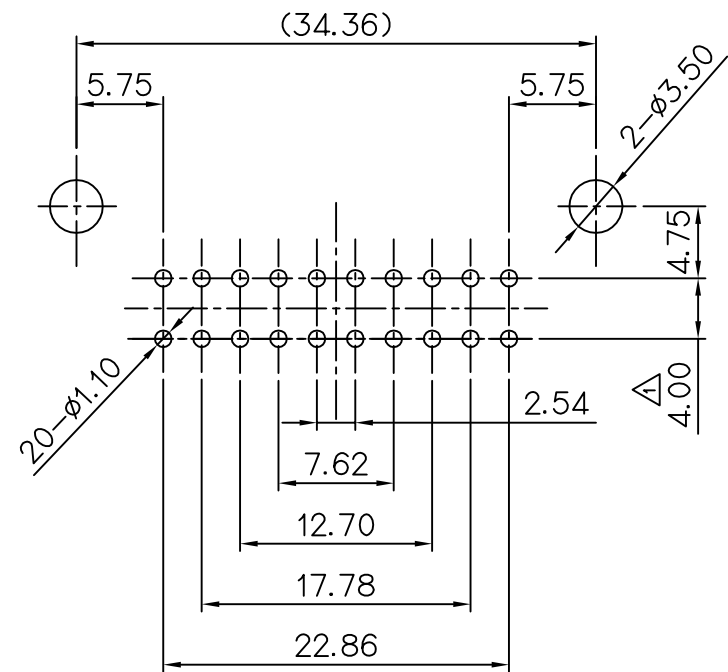
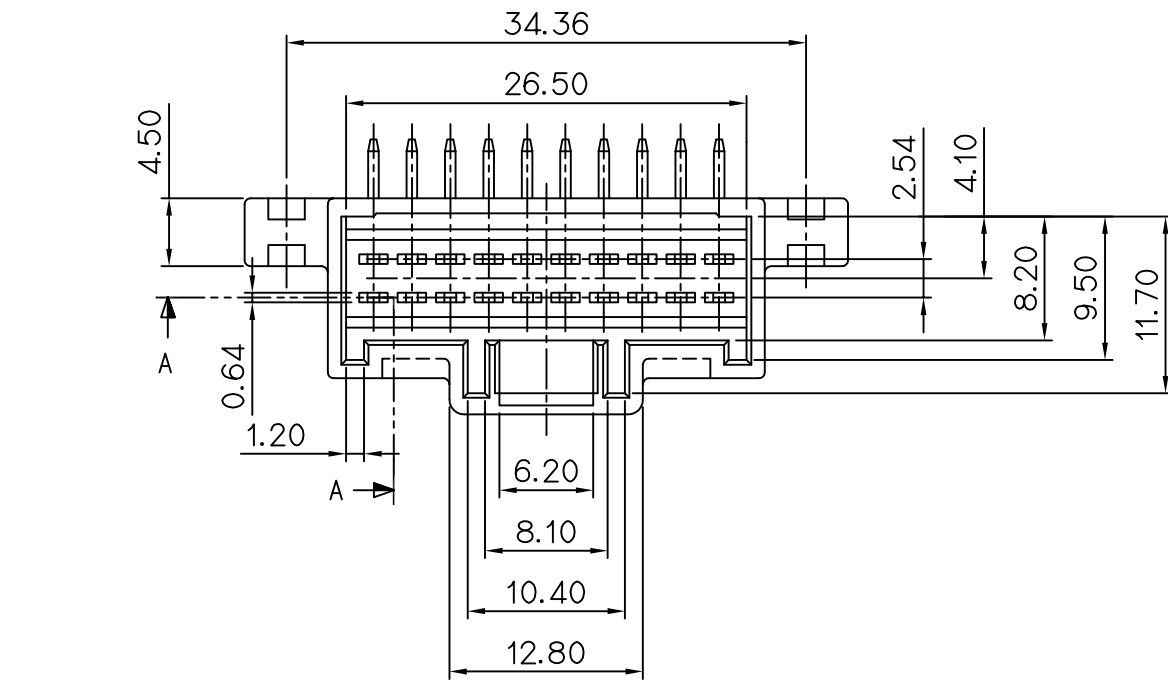


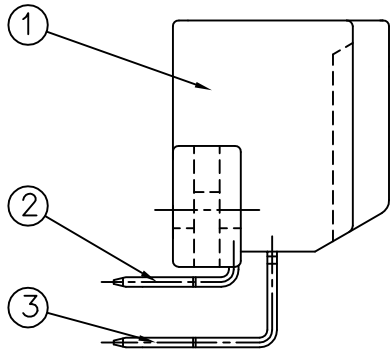


PRINT CIRCUIT BOARD PITCH  
(TOLERANCE ±0.1)

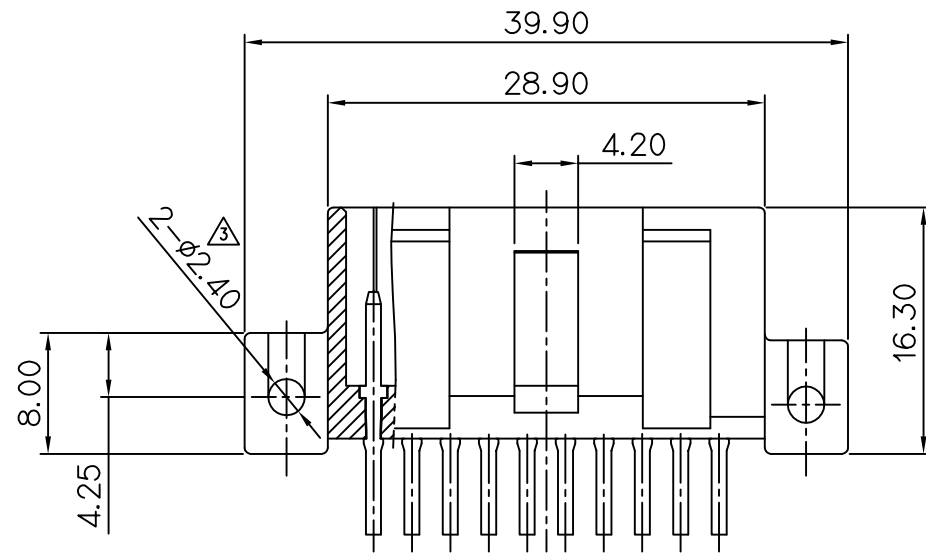

SECTION A-A

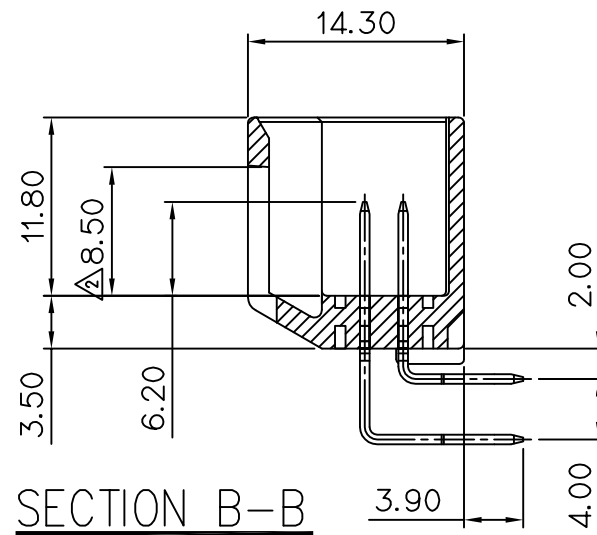

SECTION B-B

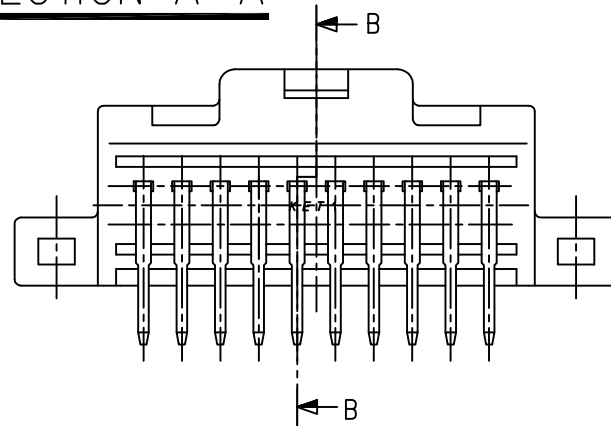

NOTE

- 기능상 유해한 "BURR", 변형 등이 없을것.
- 상대 적용 RECEP. TERMINAL : ST730517
- 적용 SCREW : M3 일반나사



ISSUE MARK

| NO. | PART NAME           | QT'Y  | METERIAL | FINISH  |
|-----|---------------------|-------|----------|---------|
| 1   | SP REC' HS'G 20P    | 1 EA  | PBT      | NATURAL |
| 2   | PCB TERMINAL-HZT(S) | 10 EA | BRASS    | PRE-TIN |
| 3   | PCB TERMINAL-HZT(L) | 10 EA | BRASS    | PRE-TIN |

|                                                                                       |                            |                 |          |           |                                |                                           |                                                                                                                            |                   |
|---------------------------------------------------------------------------------------|----------------------------|-----------------|----------|-----------|--------------------------------|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|-------------------|
|                                                                                       |                            |                 |          |           | MATERIAL SEE TABLE             |                                           |  KOREA ELECTRIC<br>TERMINAL CO., LTD. |                   |
|                                                                                       |                            |                 |          |           | FINISH SEE TABLE               |                                           |                                                                                                                            |                   |
|  | Mounting부 강도보강, 적용 Screw명시 | SHIN<br>K.J.KIM | C.H. KIM | 04.10.06  | WIRE RANGE                     |                                           | CLASS                                                                                                                      |                   |
|  | 접촉안정성 개선                   | SHIN<br>w/      | —        | 03.01.21  | INSULATION                     |                                           | TYPE 7222-1403                                                                                                             |                   |
|  | 치수기입오기 수정                  | SHIN<br>—       | —        | '02.12.27 | TOLERANCE EXCEPT AS NOTED ±0.2 |                                           | SCALE 2/1                                                                                                                  | PART NO. MG640380 |
| LTR                                                                                   | REVISION RECORD            | DR.             | CHK.     | APP.      | DATE                           | PART NAME                                 |                                                                                                                            |                   |
| DR.                                                                                   | WON. 95.01.05              | CHK.            | Sik      | '95.      | 1/5                            | SP - 20P RECEP. CONNECTOR(HZT TYPE) ASS'Y |                                                                                                                            |                   |
| CHK.                                                                                  | — 1/6 / 12/02/2004/4/6-LAF | APP.            |          |           |                                |                                           |                                                                                                                            |                   |