
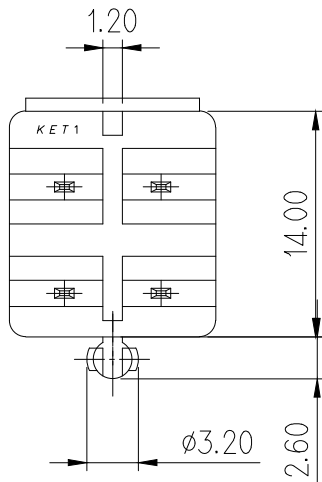
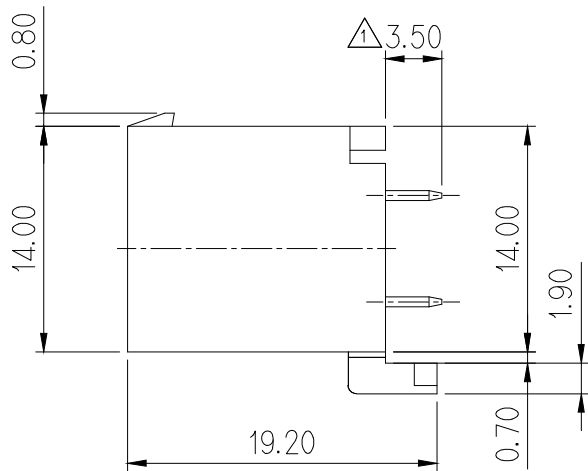
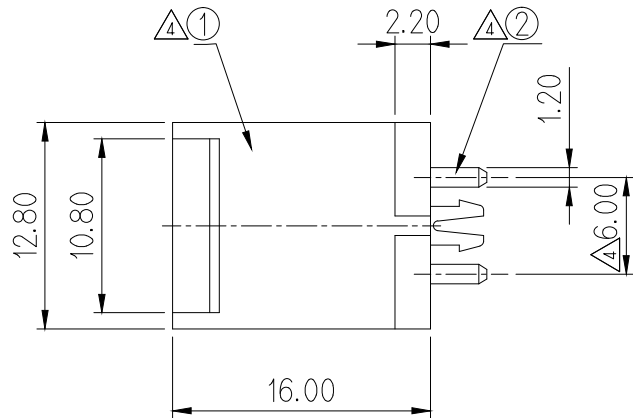


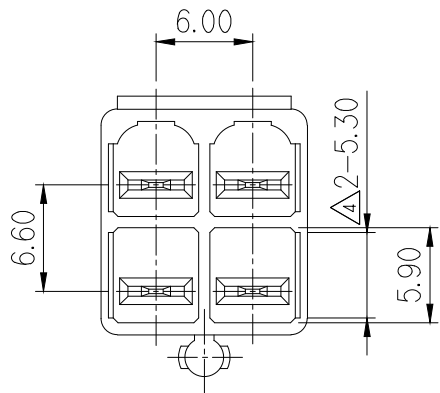

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

주 기

- 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을것.
- 적용 HOUSING: MG610476, 610476R
- 제품 내 함유된 10대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs, DEHP, DBP, BBP, DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

- MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG610476, 610476R
- 10 HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

PART	FLAME CLASS
640475	V-2
640475R	V-0

NO.	PART NAME	MATERIAL	FINISH	Q'TY
①	1806 4M PCB HOUSING	PA66	SEE TABLE	1 EA
②	1806 PCB TAB TERM'	BRASS	PRE-TIN	4 EA

MG640475			NO.	COLOR
5	4	3	0	NATURAL
*			1	RED
*			2	BLUE
			3	YELLOW
			4	GRAY
			5	BLACK
			6	GREEN

MG640475R			NO.	COLOR
5	4	3	0	NATURAL
*			1	RED
*			2	BLUE
			3	YELLOW
			4	GRAY
			5	BLACK
			6	GREEN

APPROVED

2021-10-20

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

5	ECO-2101-276 근거 도면 재작성	YHJ	PSH	KSH	'21.01.26	MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
4	ECO-1702-228 근거 도면 재작성	LYS	KSH	BUC	'17.02.14	FINISH	SEE TABLE	
3	ECO-1507-037 근거 도면 재작성	LCM	KSH	BUC	'15.07.09	WIRE RANGE		CLASS SAMSUNG
2	설계사양변경(S110128)근거 도면 재작성	433	433	433	'11.04.28	INSULATION		TYPE
1	설계사양변경(S070231)근거 도면수정	PJM	433		'07.10.18	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NO.	MG640475 MG640475R	
DR.	HAN.	'92.4.22	CHK.	433		PART NAME		
CHK.	S. w		APP.	433		1806 4M PCB CONN'T ASSY		