
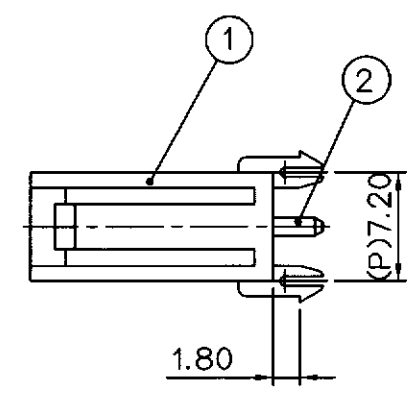
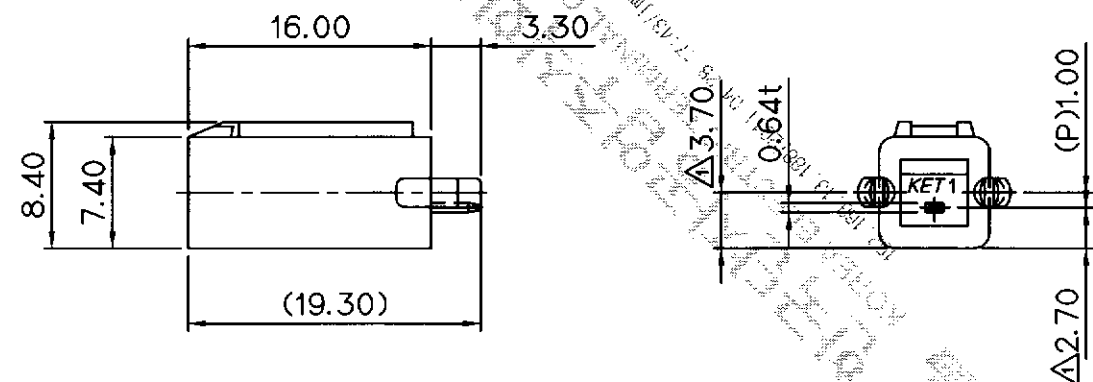



CUSTOMER DRAWING

PART NO. MG640595

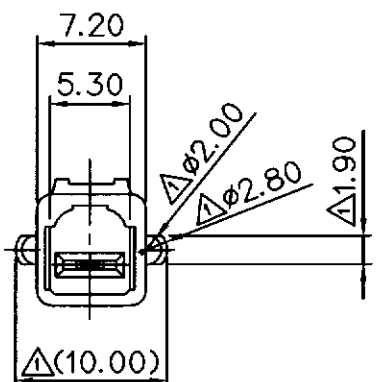

NO.	MATERIAL	COLOR
0	PA66 +GLASS	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

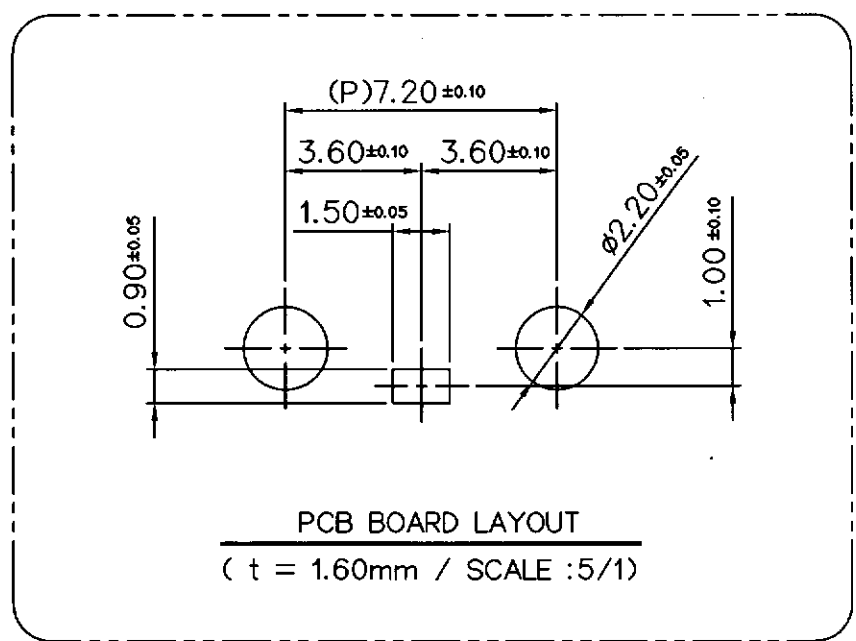

NO.	PART NAME	PART NO.	MATERIAL	Q'TY
1	1806 1M PCB HOUSING	MG670594	PA66/V2	1
2	1806 PCB MALE TERMINAL	ST790457-3	BRASS(0.64t)	1

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG610596
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 하우징 : MG610596
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

ISSUE MARK

						MATERIAL	SEE TABLE	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
②	설계사양변경서(S110128)근거 도면 재작성	PJM	ELV	32		'11.04.28	WIRE RANGE	CLASS	
①	DIMS 추가 및 삭제	HAN				'93.08.30	INSULATION	TYPE PCB	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG640595
DR. HAN '93.1.08		CHK.		APP.		PART NAME			
CHK. S. W		APP.		1806 PCB REC' 1P ASS'Y					

DIMENSIONS IN MM