


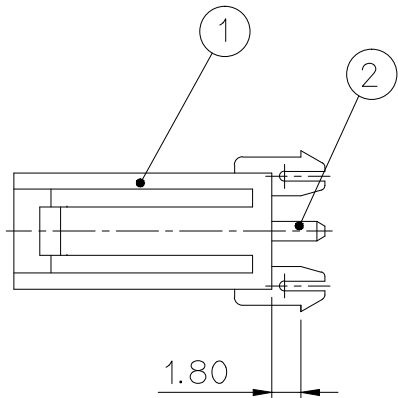
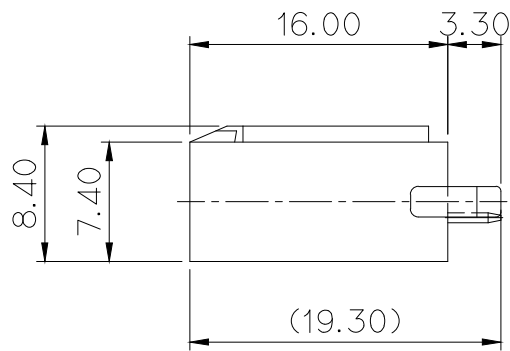


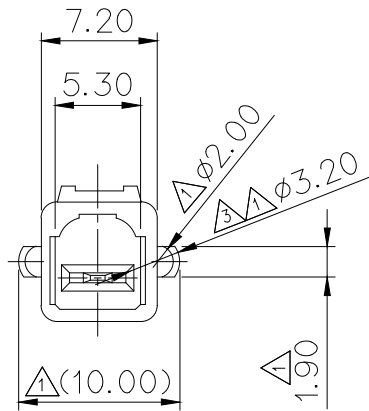

△3	NO.	MATERIAL	COLOR
*	0	PA66 +GLASS	NATURAL
*	1		RED
*	2		BLUE
*	3		YELLOW
*	5		BLACK
*	6		GREEN

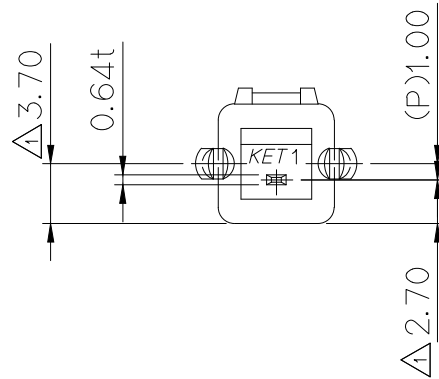

△3 GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

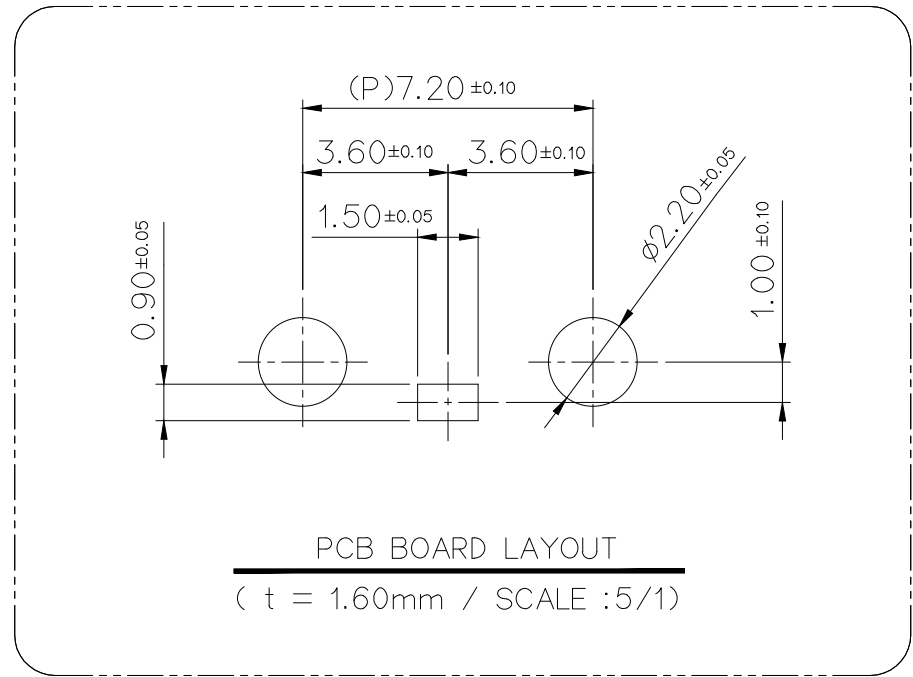

△3	NO.	PART NAME	MATERIAL	Q'TY
	1	1806 1M PCB HOUSING	PA66/V2	1
	2	1806 PCB MALE TERMINAL	BRASS(0.64t)	1

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG610596
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기


- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 하우징 : MG610596
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH SEE TABLE		
△3	ECO-1702-218 근거 도면 재작성	LYS	KSH	BUC	'17.02.14	WIRE RANGE		CLASS
△2	설계사양변경서(S110128)근거 도면 재작성	PJM	KSH	BUC	'11.04.28	INSULATION		TYPE PCB
△1	DIMS 추가 및 삭제	HAN			'93.08.30			PART NO. MG640595
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	
DR. HAN '93.1.08		CHK. 		PART NAME				
CHK. 		APP.		1806 PCB REC' 1P ASS'Y				