
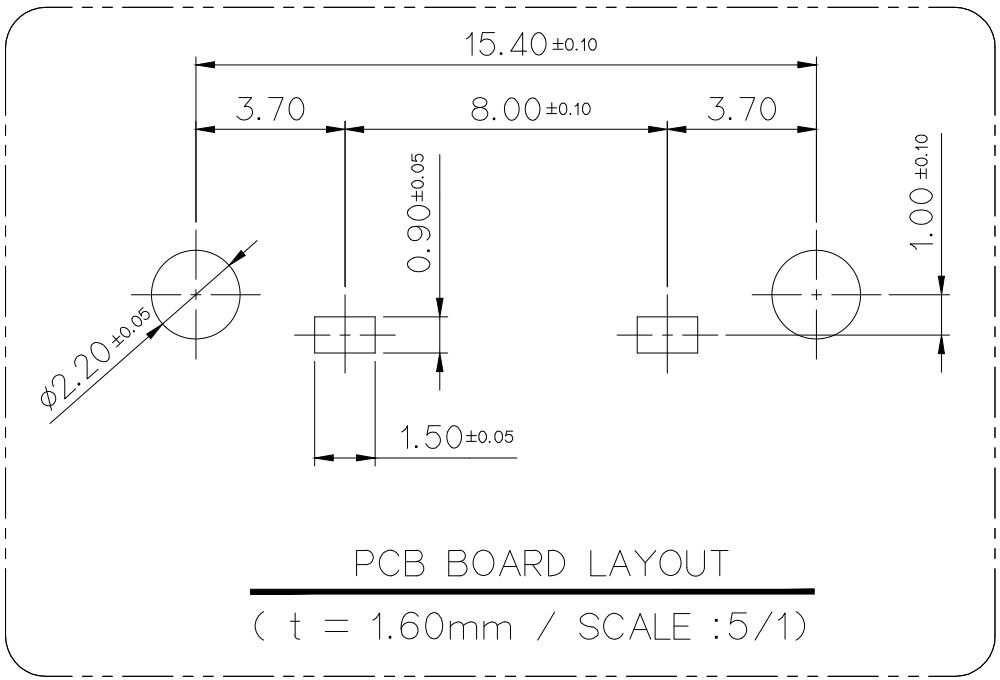


△GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

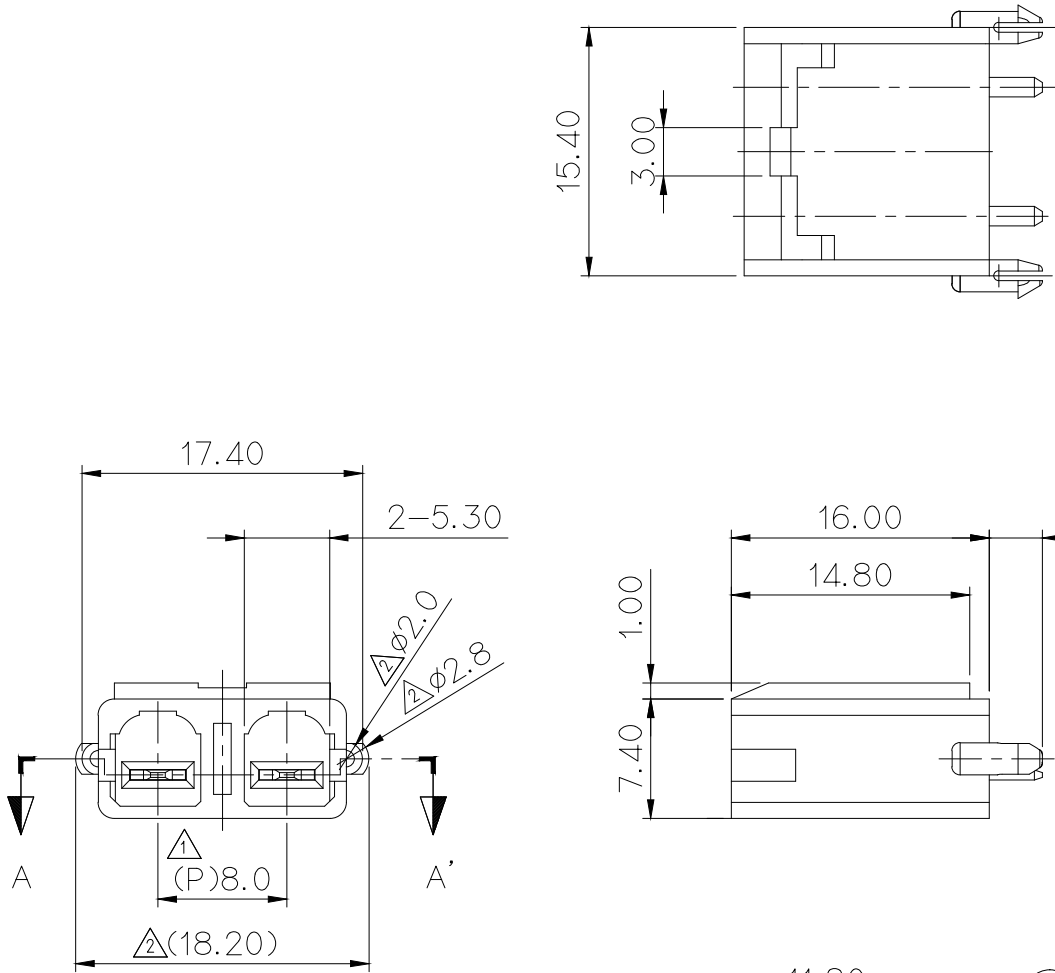


NO.	PART NAME	MATERIAL	Q'TY
1	1806 PCB 2M HSG	PA66/V2	1
		PA66/V0	
2	1806 PCB TAB TERMINAL	BRASS(0.64t)	2

△△ MG640598[PA66/V2]

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
4	GRAY
5	BLACK
6	GREEN

△△ MG640598R[PA66/V0]

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
4	GRAY
5	BLACK
6	GREEN

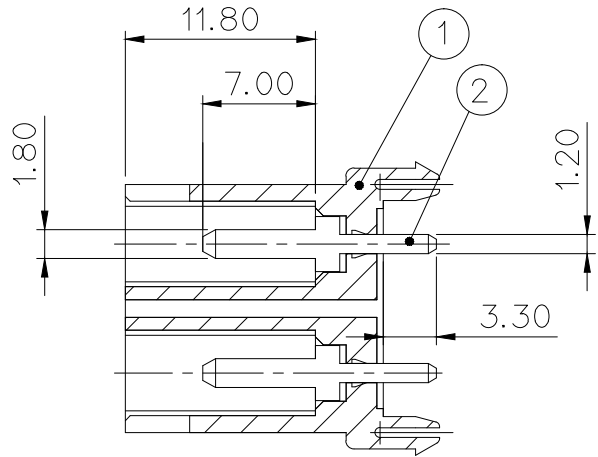

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG610599/MG610599R

△3.10 HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 하우징 : MG610599/MG610599R
- 제품 내 함유된 10대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs, DEHP, DBP, BBP, DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

△6	ECO-1907-441근거도면 재작성	YHJ	KSH	KHG	'19.07.30
△5	ECO-1803-158근거도면 재작성	LCM	KSH	BUC	'18.03.13
△4	설계사양변경(S110128)근거 도면 재작성	PJM		BUC	'11.04.28
△3	설계사양변경(S040114)근거 도면 재작성				'04.08.25
△2	DIMS 추가 및 삭제	HAN			'93.08.30
△1	PITCH 수정 (고려 요청)	HAN			'93.06.05

LTR	REVISION RECORD	DR.	CHK.	APP.	DATE

MATERIAL	SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD. Electronic Product Development Team
FINISH	SEE TABLE	
WIRE RANGE		CLASS
INSULATION		TYPE PCB
TOLERANCE EXCEPT AS NOTED	SEE TABLE	PART NO. △3 MG640598/MG640598R
SCALE	2/1	
PART NAME	1806 PCB REC. 2P ASS'Y	

APPROVED

2020-12-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK