
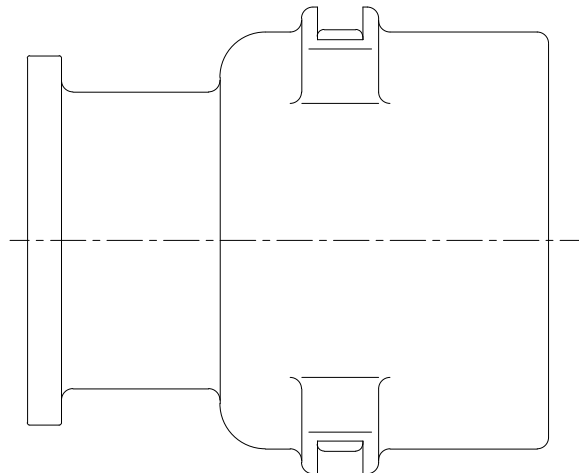
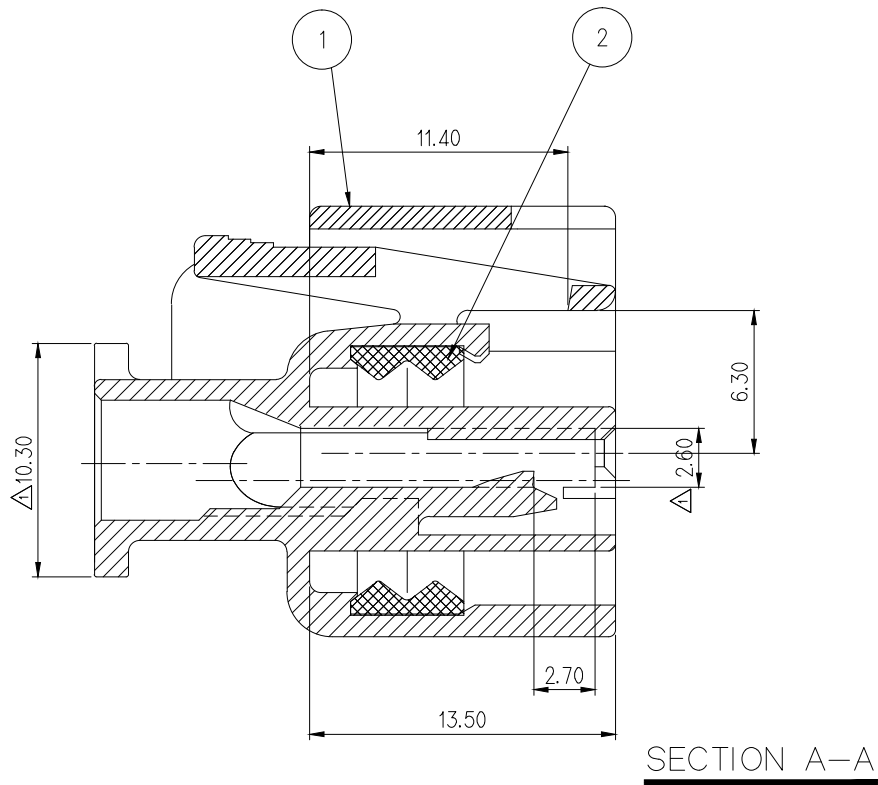
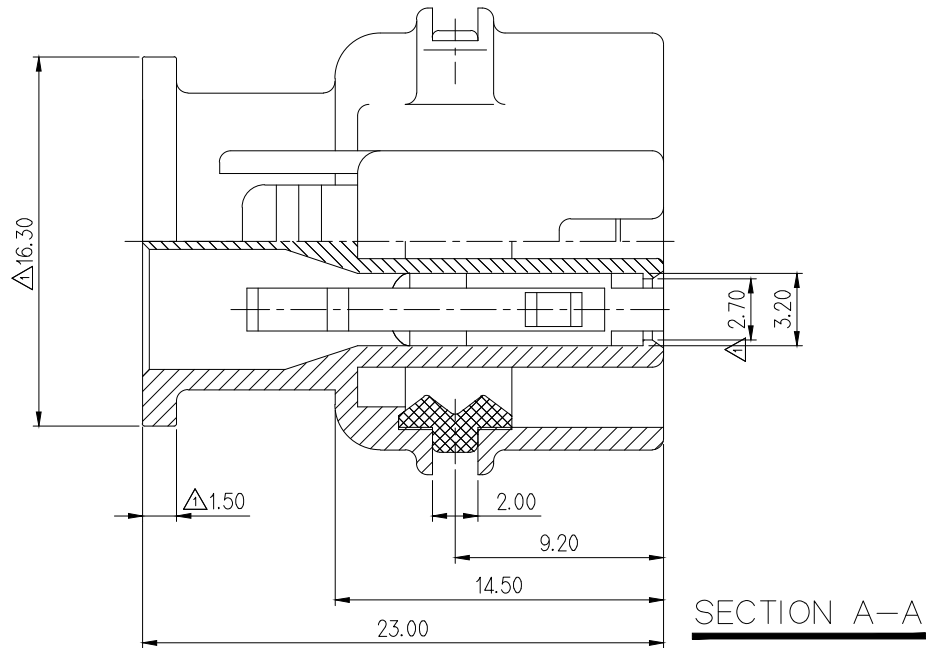



NOTE

1. MUST BE FREE OF FLASH, SINK
AND IMPERFECTION THAT AFFECT FUNCTION.
2. CONN'T ASSY INSERTION FORCE : MAX 5kgf
3. APPLICABLE TERMINAL NO. : ST730502, ST730554
WIRE SEAL : MG680604, MG680749
4. WATERPROOF PREFORMANCE : 0.5Kgf/cm ,30sec into Air
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,
MECURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs)
SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV
DIRECTIVE & RoHS REGULATION.

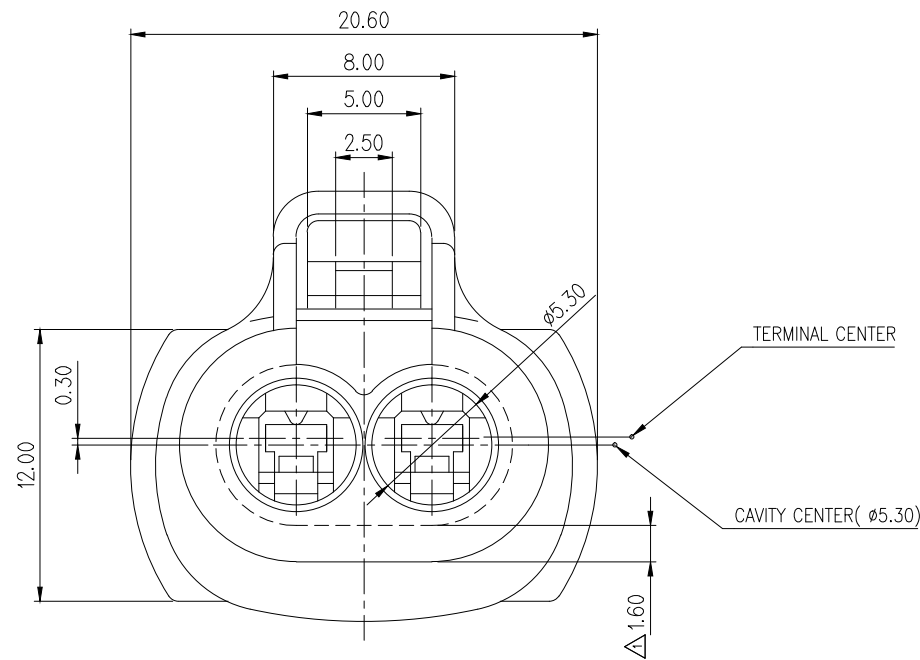

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	
GENERAL TOLERANCE (SILICONE RUBBER)					
50MAX	100MAX	250MAX	250OVR	ANGLE	ECCENT
±0.2	±0.3	±0.5	±0.75	±30'	0.1

NO	PART NAME	PART NO	MATERIAL	COLOR
1	WP 2P RECEP. HOUSING	MG670794	PBT	NATURAL
		MG670794-5		BLACK
2	INNER SEAL	P900569	SILICONE	BLUE

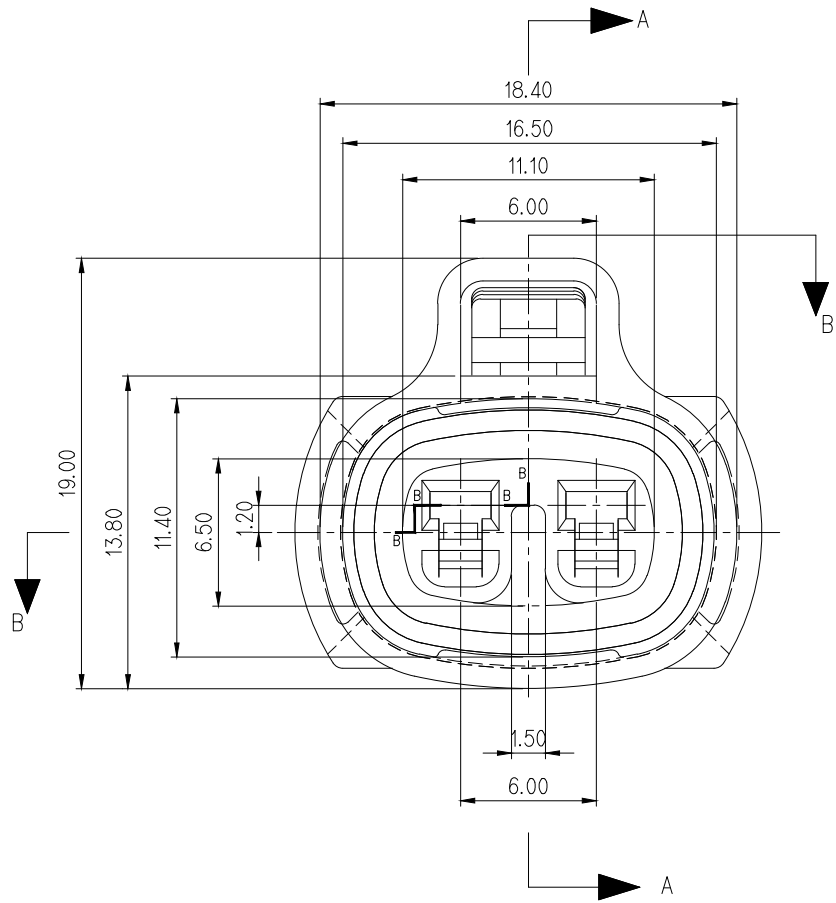

주 기

1. 기능상 유해한 BURR 및 변형등이 없을 것.
2. CONNECTOR 삽입력 : 5 Kgf 이하
3. 적용 TERMINAL : ST730502, ST730554
WIRE SEAL : MG680604, MG680749
4. 방수성능은 0.5Kgf/cm², 30sec into Air 에 만족할 것.
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL	SEE TABLE	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
					FINISH	SEE TABLE	
					WIRE RANGE		CLASS
					INSULATION		TYPE 7223-9327
	시행명령 040075 근거 도면 재 작성 (민자유치권 개편)	KYM			'04.06.21		
	REAR COVER LOCK 추가	WON KJK			'00.01.10		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	PART NO. MG640795
DR.	SIK 94.08.13	CHK.	KKJ		8.29	SCALE 4/1	
CHK.	CHOSH 8.29	APP.	Watanabe	8.29	PART NAME WP 090 2P CONNECTOR(PRESSURE S/W)		