

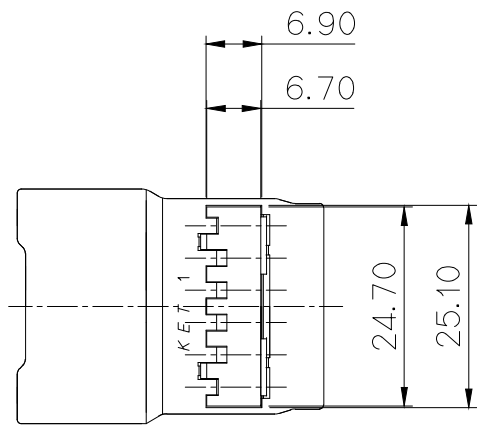
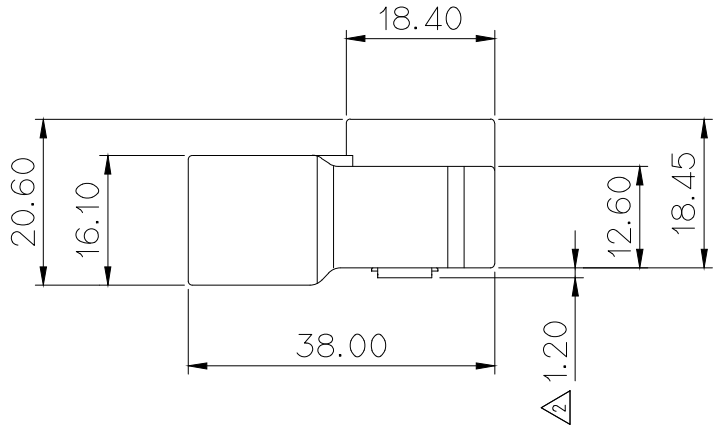
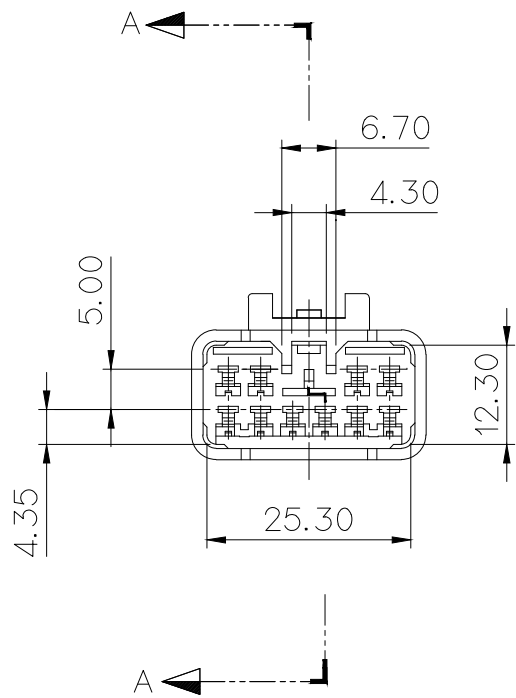
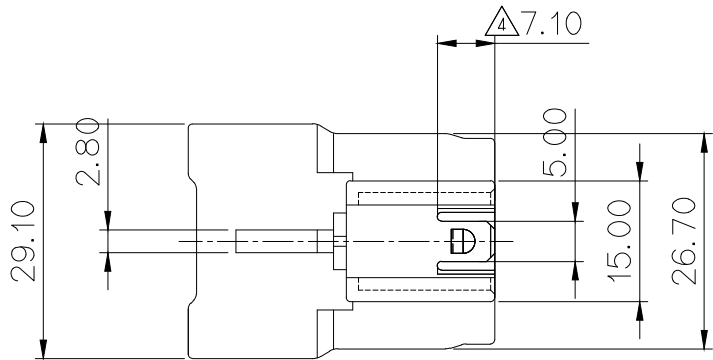


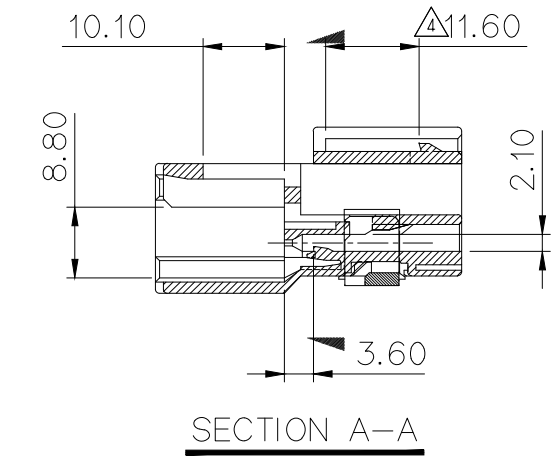

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

NO.	METERIAL	COLOR
0	P B T:	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
5		BLACK
6		W/GREEN
7		BROWN
8		GREEN

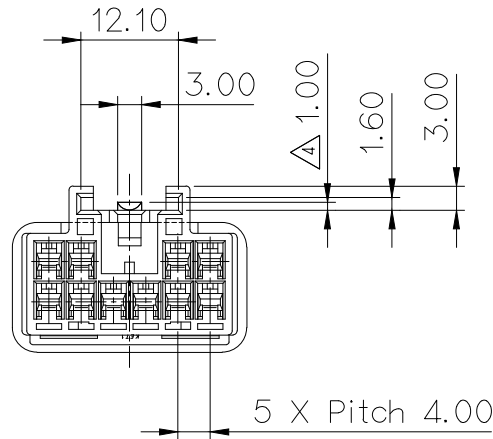

NOTE

- 제품기능상 유해한 BURR,변형 및 WELDLINE등이 없을것.
- 적용 TERMINAL: ST7406672, 673, 674
- 적용 HOUSING: MG651056
- SPACER는 본 도면과 같이 1차 LOCK'G상태로 유지, 공급할 것.

NO.	PART NO.	PART NAME	MATERIAL	COLOR
1	MG671057	.090 II 10P REC. HOUSING	SEE TABLE	NATURAL
2	MG671058	.090 II 10P REC. SPACER		NATURAL

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
4	시방변경(030018)근거 수정	CCW		'03.02.10	FINISH	SEE TABLE	
3	시방변경(990101)근거 수정	WON		'99.06.26	WIRE RANGE		CLASS .090 II
2	치수변경(1곳)	WON		'98.01.12	INSULATION		TYPE 7282-1100
1	CLIP 고착력 보강(1곳)	yun		'97.03.24	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 1/1
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NO. MG641059	
DR.	JANG 96.06.03	CHK.	H:\SHEET\SIGN\sign-2.GIF		6.07	PART NAME .090 II 10P REC. HOUSING ASSEMBLY	
CHK.	H:\SHEET\SIGN\sign-k.GIF	6.07	APP.	H:\SHEET\SIGN\sign-w.GIF		6.07	



ISSUE MARK