

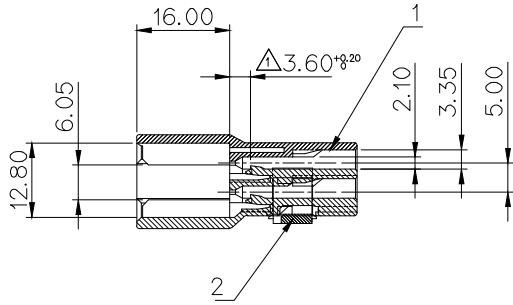


NO.	PART NO.	PART NAME	MATERIAL
1	MG671081	090 II 20M HOUSING	SEE TABLE
2	MG671082	090 II 20M SPACER	

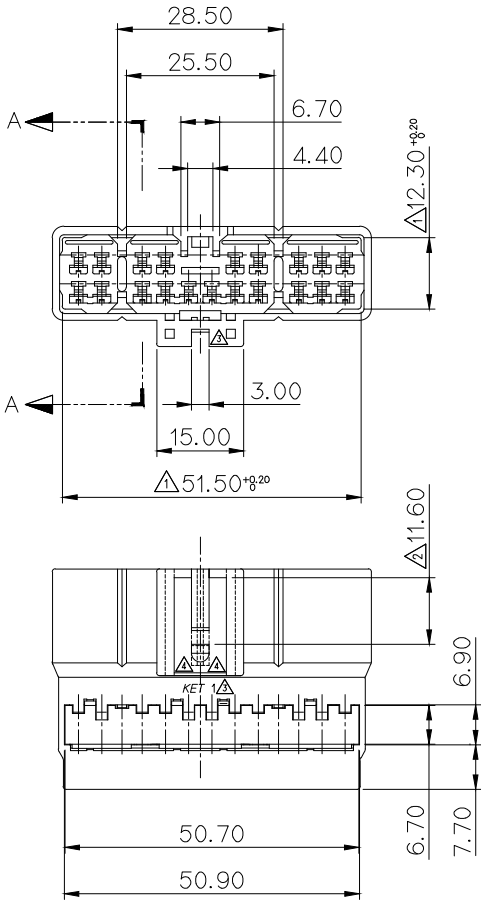

SECTION A-A



DETAIL B
(S= 5/1)

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL NO. : ST7406672, 673, 674
3. APPLICABLE HOUSING NO. : MG651080
4. SPACER MUST BE KEEP AND SUPPLY FIRST LOCKING CONDITION AS THIS DRAWING
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	MATERIAL	COLOR
0	PBT	NATURAL
1		RED
2		BLUE
3		YELLOW
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

*"는 현재 사용중인 COLOR임.

주 기

1. 제품기능상 유해한 BURR, 변형 및 WELDLINE 등이 없을 것.
2. 적용 TERMINAL : ST7406672, 673, 674
3. 적용 HOUSING : MG651080
4. SPACER는 본 도면과 같이 1차 LOCK'G 상태로 유지, 공급할 것.
5. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

5	설계시양변경(S090112)근거 도면 재작성	CDH		2009.05.07	MATERIAL	SEE TABLE		
4	설계시양변경(S070017)근거 도면 재작성	KBS	HSK	KKJ	2007.01.23	FINISH		SEE TABLE
3	설계시양변경통보서(S050246)에 의거 수정	JYS	HSK	KKJ	2005.10.20	WIRE RANGE		
2	시방변경서(030018)의거 CLIP부 수정	CCW	KKJ	JJH	2003.02.07	INSULATION		
1	고객요청에의한 치수추가	INO	KKJ	JJH	2000.11.11	TOLERANCE EXCEPT AS NOTED		SEE TABLE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	SCALE	PART NO.	MG641083
DR.	WON. 1997.03.27	CHK.	KKJ			1/1		
CHK.		APP.	CHOSH				090 II 20M ASSY	