
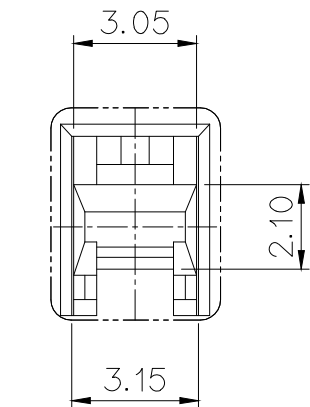
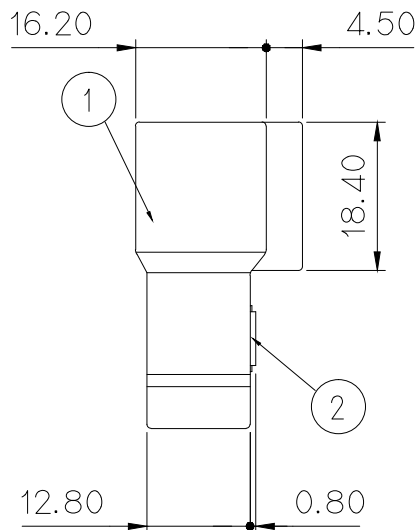
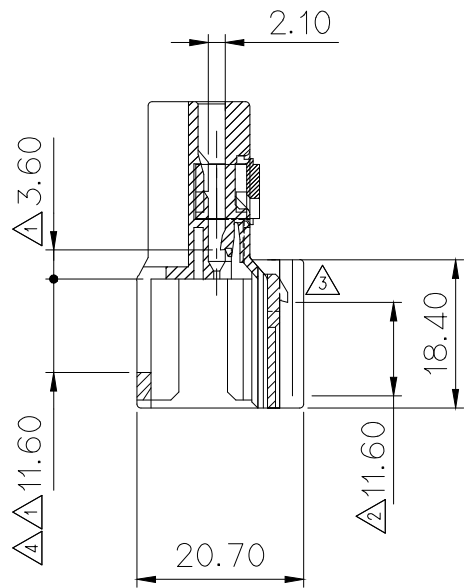
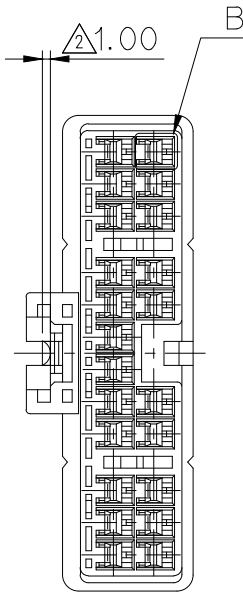
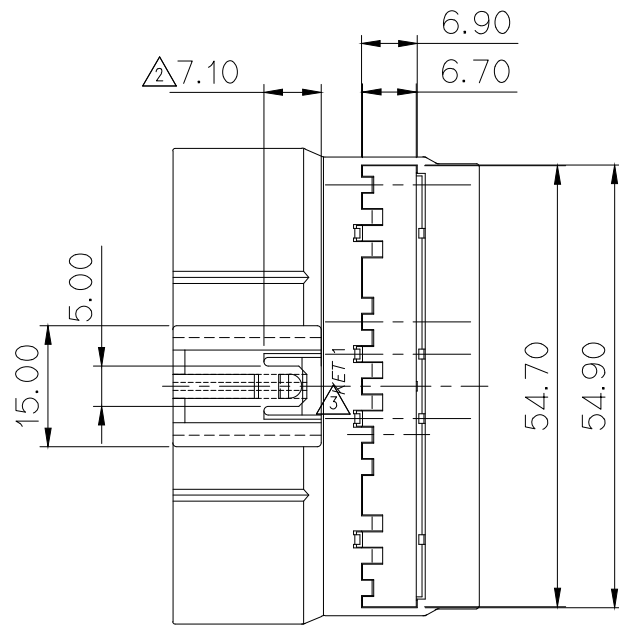
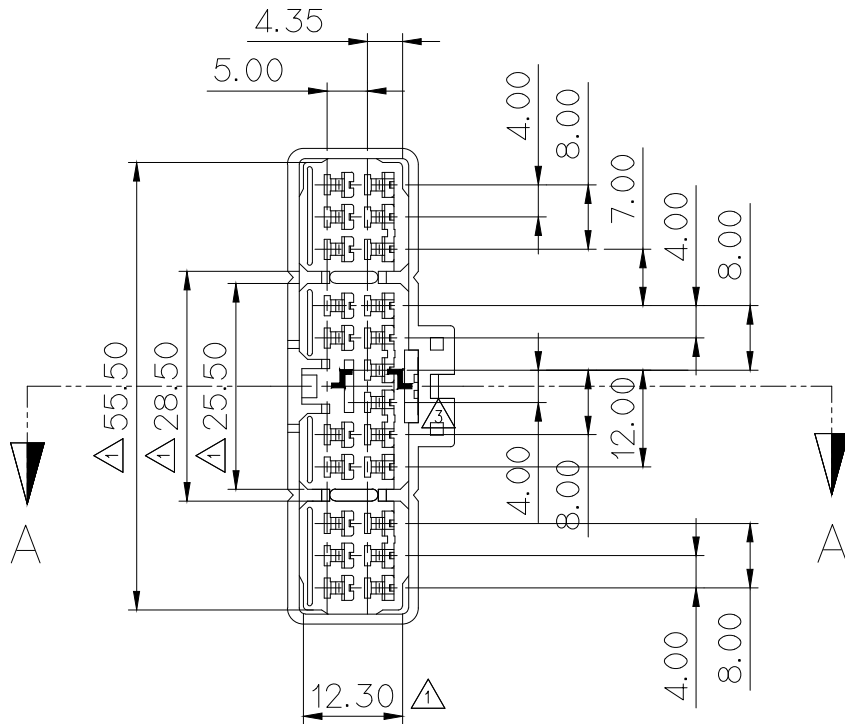


NO	P / NO	P / NAME	MATERIAL	FINISH
1	MG671087	.090II 22P MAIL HS'G	PBT	NATURAL
2	MG671088	.090II 22P MAIL SPACER	PBT	NATURAL

NOTE

1. MUST BE FREE OF FLASH, SINK
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL NO. : ST740672,673,674
3. APPLICABLE TERMINAL NO. : MG651086
4. SPACER MUST BE KEEP AND SUPPLY
FIRST LOCKING CONDITION AS THIS DRAWING
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,
MECURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs)
SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV
DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

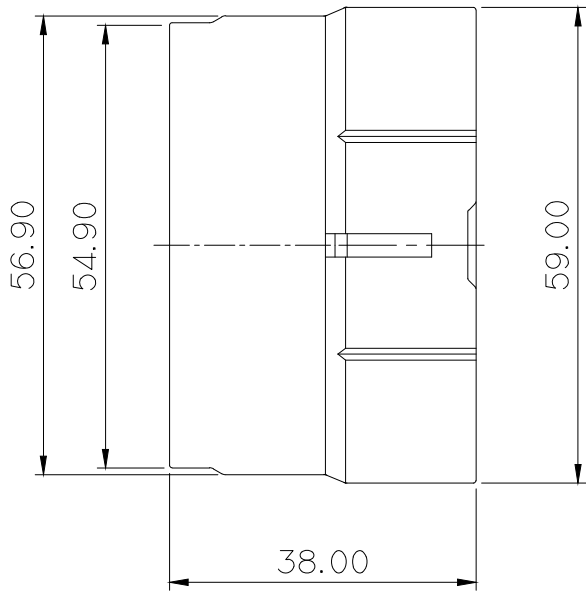

DETAIL B
(S= 5/1)

주 기

1. 제품기능상 유해한 BURR,변형 및 WELDLINE등이 없을것.
2. 적용 TERMINAL: ST740672,673,674
3. 적용 HS'G : MG651086
4. SPACER는 본 도면과 같이 1차 LOCK'G 상태에서 유지, 공급할 것.
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs,
PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를
초과해서는 안된다.

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.
4	설계사양변경(S090305) 근거 도면재작성 (LOCK 거리 증가)	BJG			'09.10.22	FINISH SEE TABLE		
3	설계사양변경통보서(050219)에 의거 수정	JYS	HSH	KKJ	'05.09.14	WIRE RANGE		
2	시방변경서(030018)의거 CLIP부 수정	CCW	KKJ	JJH	'03.02.10	INSULATION		
1	고객요청에의한 치수추가	INO	KKJ	JJH	'00.11.11	TYPE		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG641089
DR. JANG 98.03.24		CHK. KKJ			PART NAME			
CHK. JJH		APP.			.090II 22P MAIL HS'G ASS'Y			