
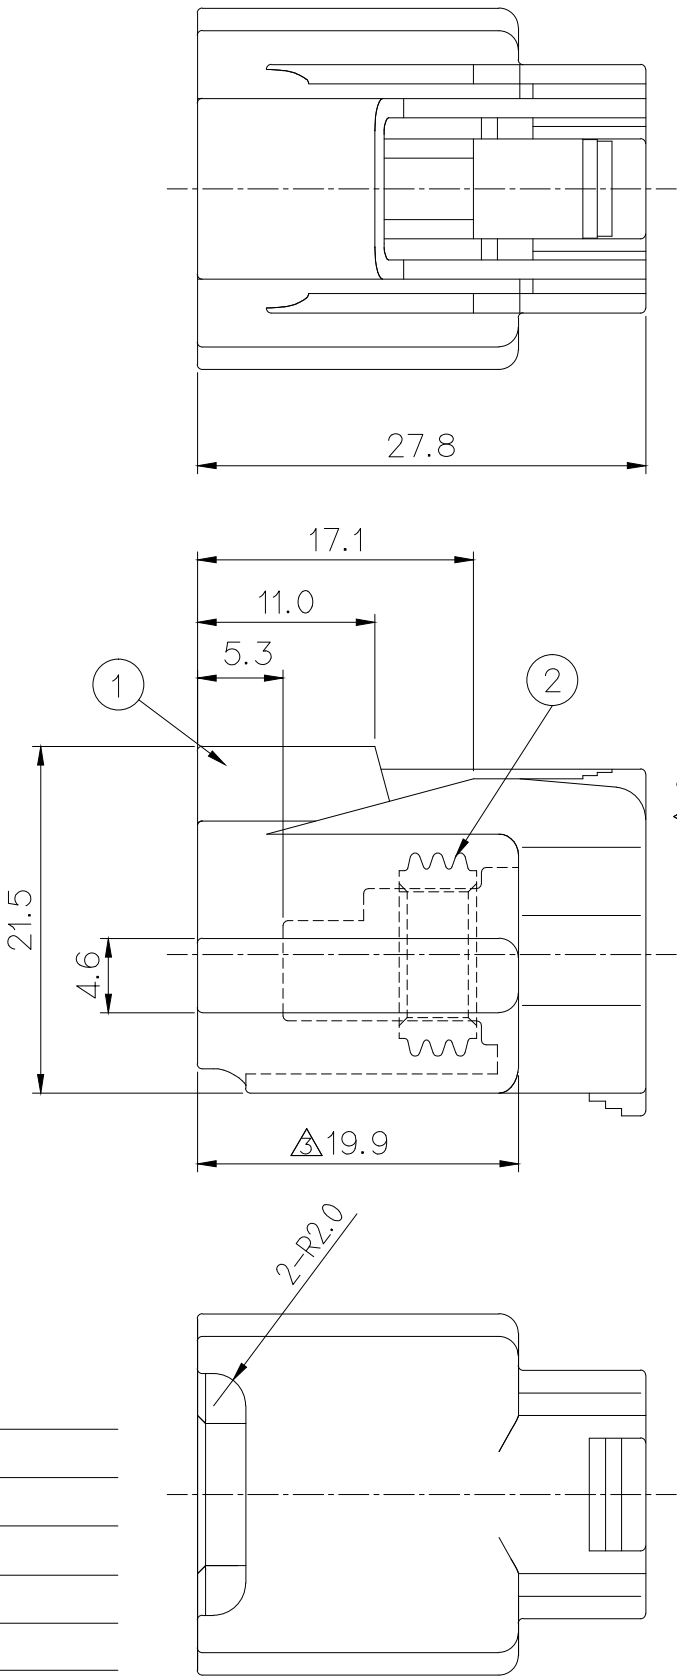


GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±1.4	±30'	0.1	

주 기

1. 기능상 유해한 BURR 및 미성형 등이 없을 것.
2. 적용 PLUG HOUSING : 1) HORN S/W
2) WIRE SEAL: MG680952,604,749
△MG682507
3. 적용 TAB TERMINAL : ST730502-3, 554-3
4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬
PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

△NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
* 4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

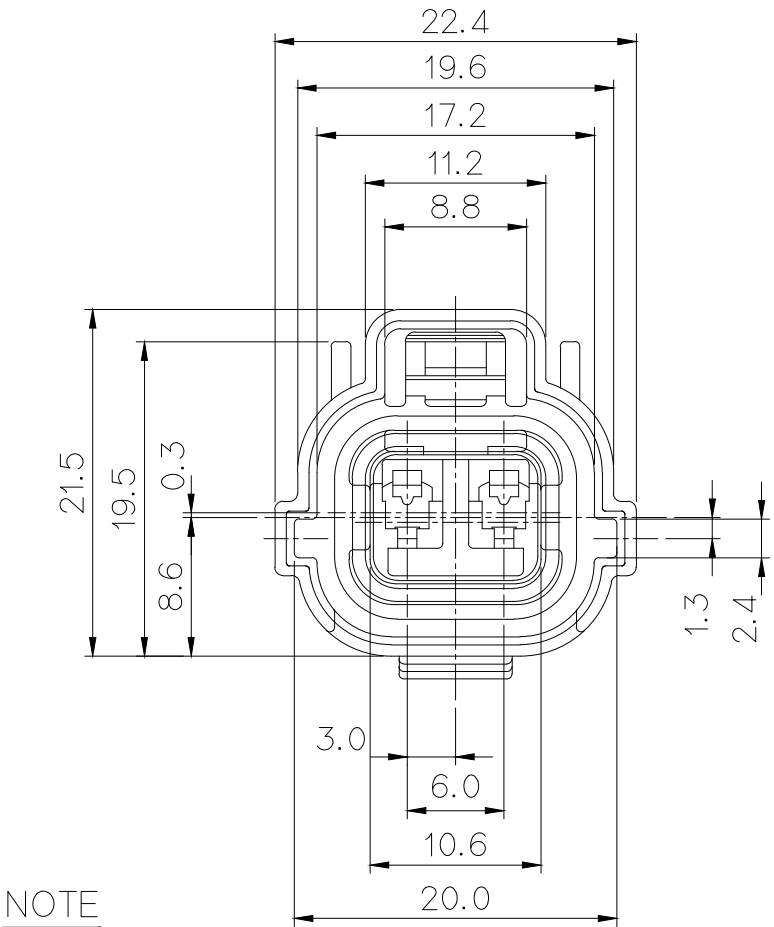

NOTE

1. MUST BE FREE OF FLASH, SINK
AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE PLUG HOUSING : 1) HORN S/W
2) WIRE SEAL: MG680952,604,749
△MG682507
4. APPLICABLE TAB TERMINAL: ST730502-3,554-3
5. HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,
CADMIUM, HEXAVALENT CHROMIUM,PBBs,PBDEs)
SHALL NOT EXCEED THE MAXIMUMPERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE
& RoHS REGULATION.

NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG671155	090WP 2P REC HORN HSG	—	—
2	△R600061	090WP 2P REC HORN INNER SEAL	SILICONE	BLACK

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
④	ECO-2002-267 근거 도면 재작성	KSC	—	CJH	'20.02.24	FINISH SEE TABLE			
③	ECO-1503-279 근거 재작성	CHW	HYJ	LSY	'15.03.12.	WIRE RANGE		CLASS	
②	시방변경(000035) 근거 재작성	LKJ	KKJ	CJH	'00.01.24.	INSULATION		TYPE	
①	시방변경(970056) 근거 재작성	MAN	KKJ	CJH	'97.10.23.				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG641156
DR. MAN '96.05.15.		CHK. CHOSH				PART NAME			
CHK. S.I.SANG		APP. Watanabe				090WP 2P REC HORN ASS'Y			

APPROVED

2020-12-09

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK