


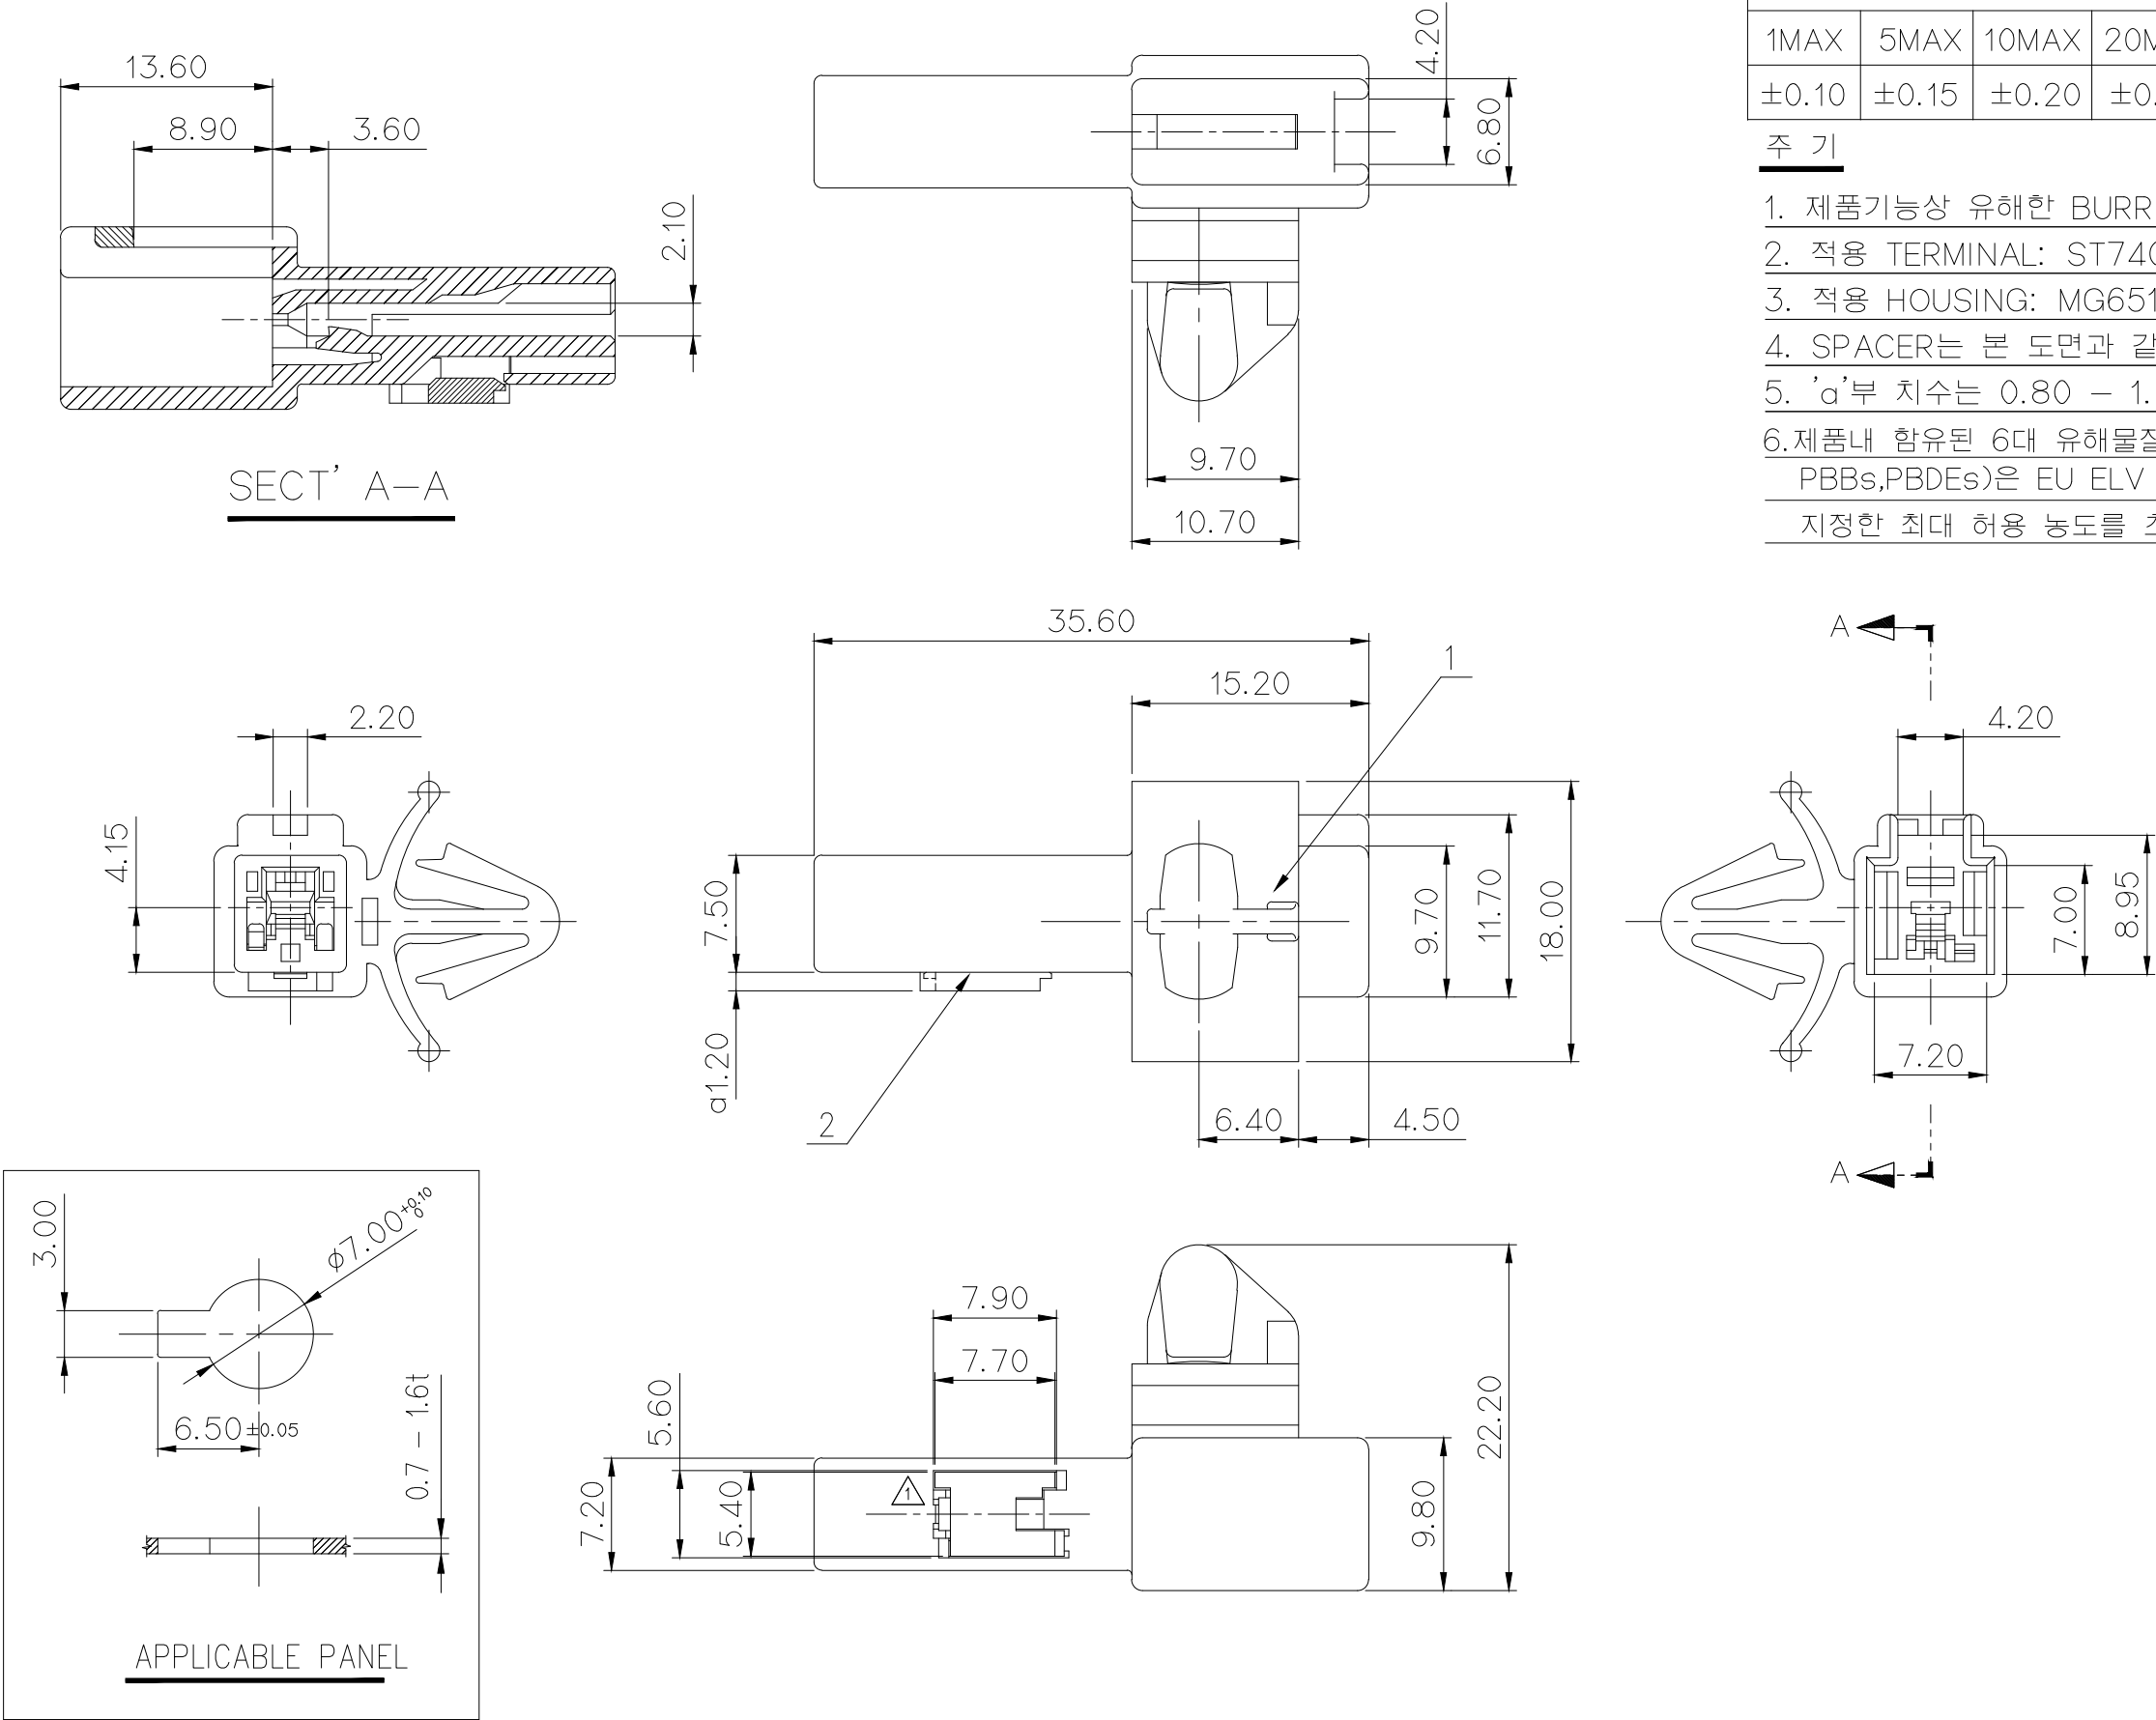

GENERAL TOLERANCE (HOUSING)							USED ON
1MAX	5MAX	10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.10	±0.15	±0.20	±0.25	±0.30	±30'	0.10	
주 기							
1. 제품기능상 유해한 BURR,변형 및 WELDLINE등이 없을것.							
2. 적용 TERMINAL: ST740672, ST740673, ST740674							
3. 적용 HOUSING: MG651194							
4. SPACER는 본 도면과 같이 1차 LOCK'G상태로 유지, 공급할 것.							
5. 'a'부 치수는 0.80 — 1.40까지 관리한다							
6.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서							
지정한 최대 허용 농도를 초과해서는 안된다.							

NO.	METERIAL	COLOR
0	P B T:	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
5		BLACK
6		W /GREEN
7		BROWN
8		GREEN

NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG671198	.090Ⅱ 1P REC. HS'G(CLIP)	SEE TABLE	NATURAL
2	MG671196	.090Ⅱ 1P REC. SPACER		NATURAL

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		SEE TABLE		
						WIRE RANGE		CLASS		.090 II
						INSULATION		TYPE		7282-1012
	ECO-1604-266 큰거 도면 재작성 (도면 형상 현실화)		LJJ	CKY	LSY	16.04.22				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO.	MG641199
DR. WON. '97.03.07			CHK. KKJ _{3/17}			CJH _{3/17}	PART NAME			
CHK. S.I.JANG 3/17			APP. Watanabe			3/18	.090 II 1P REC. HOUSING ASS'Y(CLIP)			