

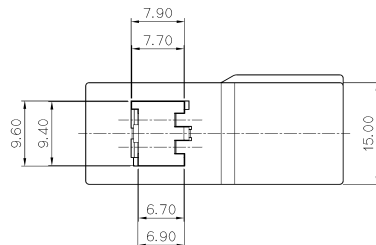
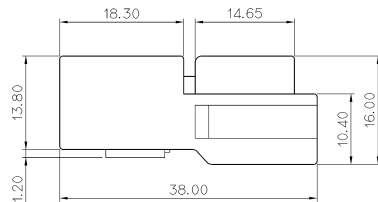

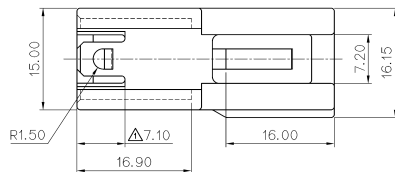


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

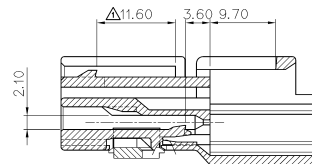

NOTE

- 제품기능상 유해한 BURR, 변형 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL: ST740672, 673, 674
- 적용 HOUSING: MG651205
- SPACER는 보 도면과 같이 1차 LOCK'G상태로 유지, 공급할 것.



SECT' A-A

NO.	MATERIAL	COLOR
0	P B T:	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
5		BLACK
6		W/GREEN
7		BROWN
8		GREEN



NO.	PART NO.	PART NAME	MATERIAL
1	MG671026	.090 II 2P REC. HS'G (RIGHT)	SEE TABLE
2	MG671028	.090 II 2P REC. SPACER	

		MATERIAL		SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD.
		FINISH		SEE TABLE	
		WIRE RANGE			CLASS .090 II
		INSULATION			TYPE 7282-1028
△ 시험변경시(0330018)에 따라 CLIP부 수정 LTR REVISION RECORD DR CHK APP DATE TOLERANCE EXCEPT AS NOTED SCALE 2/1		SEE TABLE		PART NO.	MG641207
DR. WON. '97.03.07 CHK. S.I.M. 9.09		APP. 9.09 DATE 9.11		PART NAME .090 II 2P REC. HOUSING ASS'Y(RIGHT)	