



GENERAL TOLERANCE (HOUSING)							USED ON
1MAX	5MAX	10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.10	±0.15	±0.20	±0.25	±0.30	±30′	0.10	
GENERAL TOLERANCE (TERMINAL)							
10MAX	50MAX	100MAX	250MAX	ANGLE	ECCENT		
±0.15	±0.20	±0.30	±0.50	±30′	0.10		

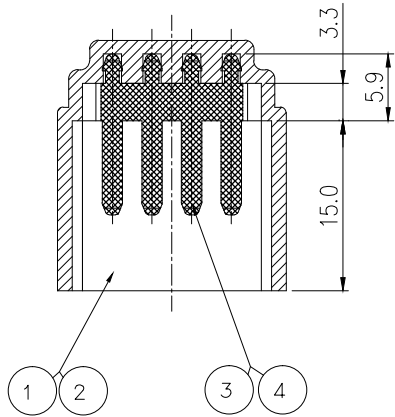


SECTION B-B

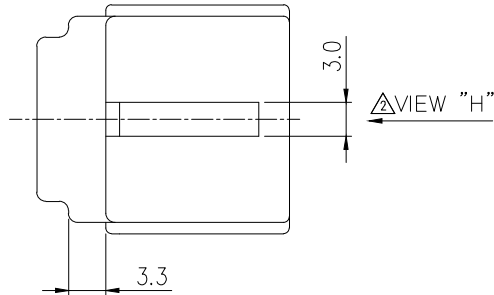




$\triangle_2$ VIEW "H"

5 NOTE

- | |
|--|
| 1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3-0.5 RADIUS. |
| 2. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION. |
| 3. APPLICABLE PRODUCT: (1) PLUG HS'G : MG610750
PLUG R/HOLDER: MG630751-7
(2) SDL/SWP CLIP Ø7.0: MG630418
SDL/SWP CLIP Ø9.0 : MG630559
SDL/SWP CLIP II Ø7.0 (HOLE TYPE)
: MG630922 |
| 4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,
MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs)
SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION
PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION. |

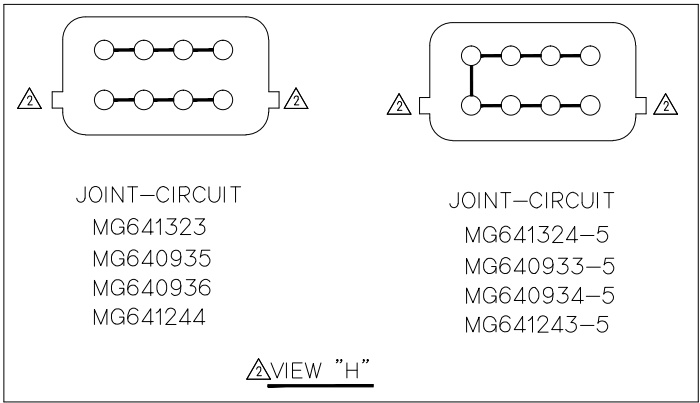


△VIEW "H"

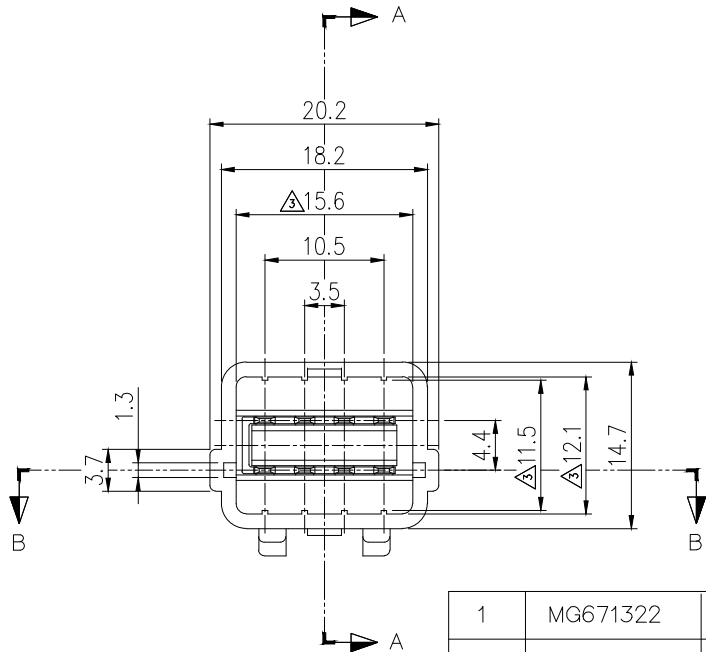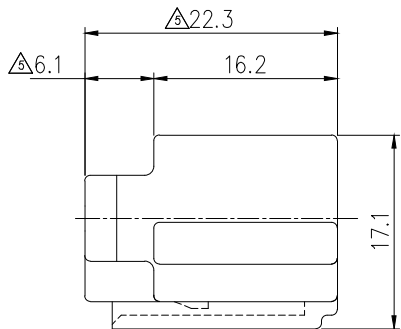


ASS'Y P/NO	MG641244									
ASS'Y P/NO	MG641243-5									
ASS'Y P/NO	MG640936									
ASS'Y P/NO	MG640935									
ASS'Y P/NO	MG640934-5									
ASS'Y P/NO	MG640933-5									
ASS'Y P/NO	MG641323									
ASS'Y P/NO	MG641324-5									

S'G 8P	Nylon66		1			1	1		1	NATURAL
S'G 8P	Nylon66	1		1	1			1		BLACK
TAB TM'L 8P	BRASS	1		1	1			1		PRE-TIN
TAB TM'L 4P	BRASS		2			2	2		2	PRE-TIN
CLIP Ø7	Nylon66			1		1				NATURAL
CLIP Ø9	Nylon66				1		1			NATURAL
II Ø7 CLIP (HOLE)	Nylon66							1	1	NATURAL
T NAME	MATERIAL	Q'TY							FINISH	



SECTION A-A

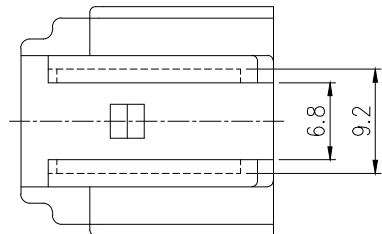

주 기

1. 지시없는 R은 0.3~0.5으로 한다.
2. 기능상 유해한 BURR, 변형등이 없을 것.
3. 적용제품 : (1) PLUG HS'G : MG610750
PLUG R/HOLDER: MG630751-7
(2) SDL/SWP CLIP Ø7.0 : MG630418
SDL/SWP CLIP Ø9.0 : MG630559
SDL/SWP CLIP II Ø7.0 (HOLE TYPE)
: MG630922
4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

△	ECO-2008-165	근거 도면	작성성	SKM	—	HYJ	'20.08.18	MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.		
△	ECO-1609-301	근거 도면	작성성	KSJ	CJH	LSY	'16.09.29	PINISH	SEE TABLE			
△	ECO-1608-260	근거 도면	작성성	KSJ	CJH	LSY	'16.08.24	WIRE RANGE	CLASS			
△	시방변경	970106	근거	HEO	JJH	KKJ	'97.12.27	INSULATION	TYPE			
△	도면	작성성		HEO	JJH	KKJ	'97.01.23					
LTR	REVISION RECORD			DR	CHK	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.	SEE TABLE
DR.	WON	'96.12.29		CHK.	JJH	'96.12.29		PART NAME				
CHK.	KKJ	'96.12.29		APP.	WAT	'96.12.30		JOINT 8P REC' HS'G ASS'Y(CLIP)				

APPROVED
2020-12-09
KOREA ELECTRIC TERMINAL CO., LTD. Korea Electric Te rminal Co., LTD.

ISSUE MARK

IKET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

CLASS

TYPE

PART NO. SEE TABLE

JOINT 8P REC' HS'G ASS'Y(CLIP)