

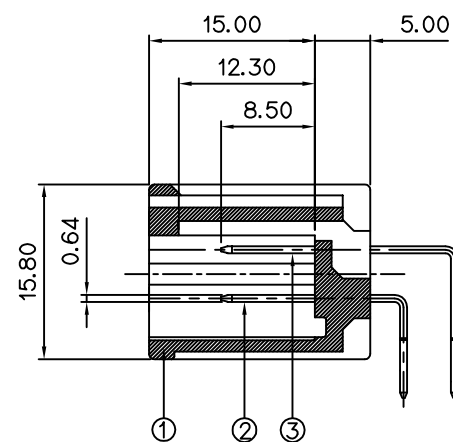
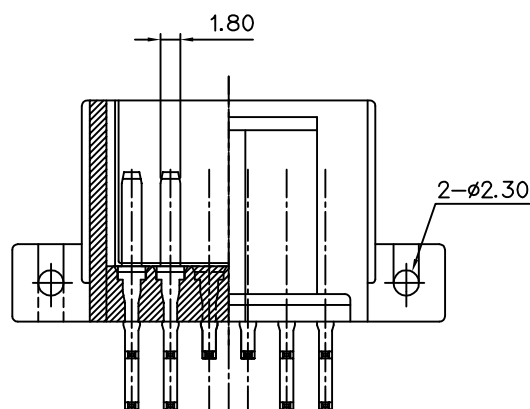


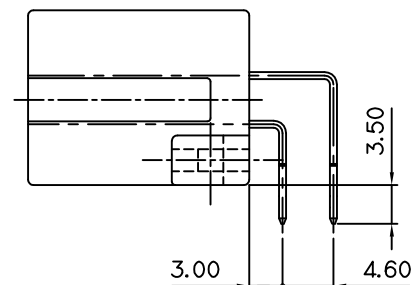

SECTION A-A

GENERAL TOLERANCE (TERMINAL)						GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	ANGLE	ECCENT	1MAX	5MAX	10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.15	±0.20	±0.30	±0.50	±30°	0.10	±0.10	±0.15	±0.20	±0.25	±0.30	±30°	0.10	

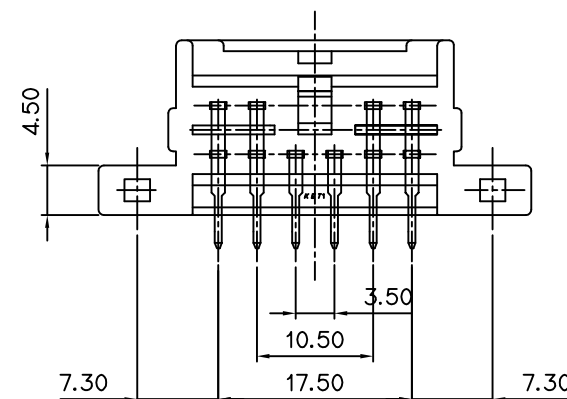

	NO.	METERIAL	COLOR
*	0	P B T	NATURAL
	1		RED
	2		BLUE
	3		YELLOW
	4		GRAY
Δ*	5		BLACK
	6		W/GREEN
	7		BROWN
	8		GREEN

“*”는 현재 사용중인 COLOR임.

NO.	PART NAME	PART NO	MATERIAL	FINISH
1	SDL PCB 10P HS'G (H2T)	MG671480	PBT	SEE ^Δ TABLE
2	TAB TERMINAL SHORT	P900722	BRASS	PRE-TIN
3	TAB TERMINAL LONG	P900723	BRASS	PRE-TIN

NOTE

- 1.지시하지 않은 반경 R은 0.5로 한다
- 2.기능상 유해한 BURR 및 변형등이 없을 것
- 3.적용 PLUG HOUSING : MG610404

										KOREA ELECTRIC	
										TERMINAL CO., LTD.	
										KINET	
										ENGINEERED	
										CLASS	
										TYPE	
시방변경 980093 근거 제작형		HEO		98.4.10							
LTR		REVISION RECORD		DR.		CHK.		DATE		TOLERANCE EXCEPT AS NOTED	
DR.		HEO 97.08.08		CHK.		4/13		SCALE		PART NO.	
CHK.		4/14		APP.		4/15		2/1		MG641481	
										SDI PCB 10P REC. HS'G ASS'Y (HZT)	