

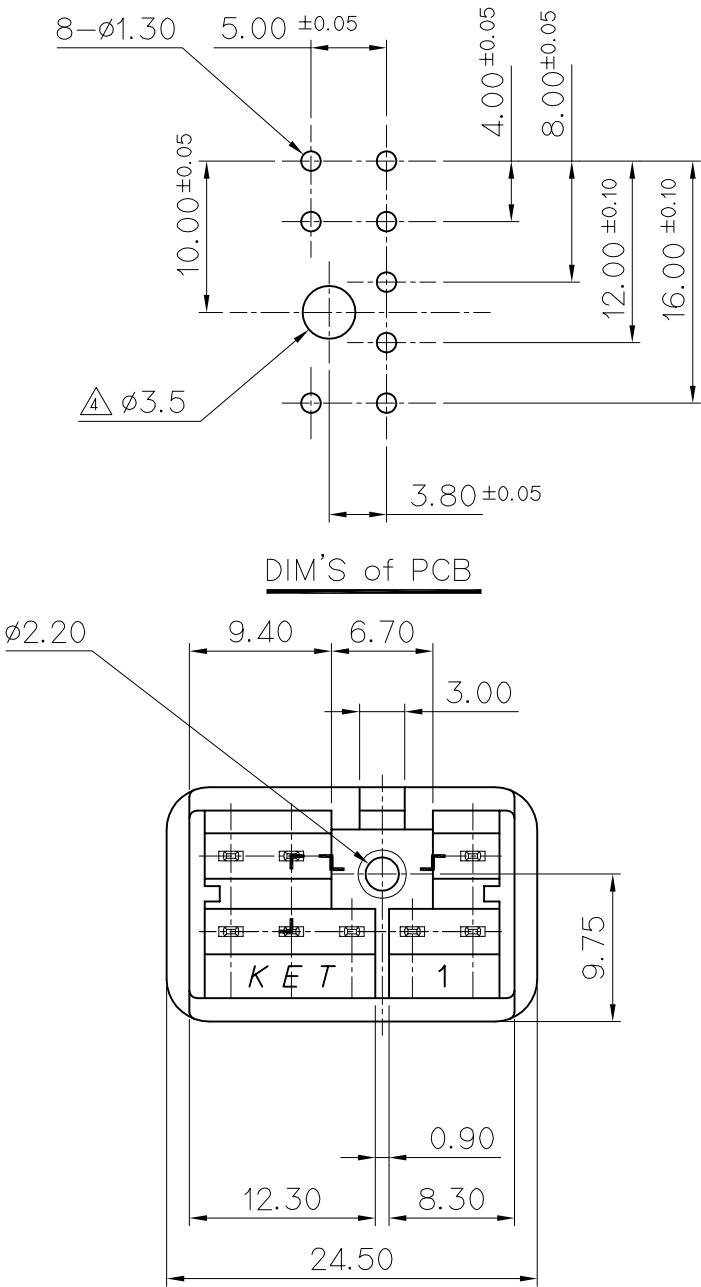


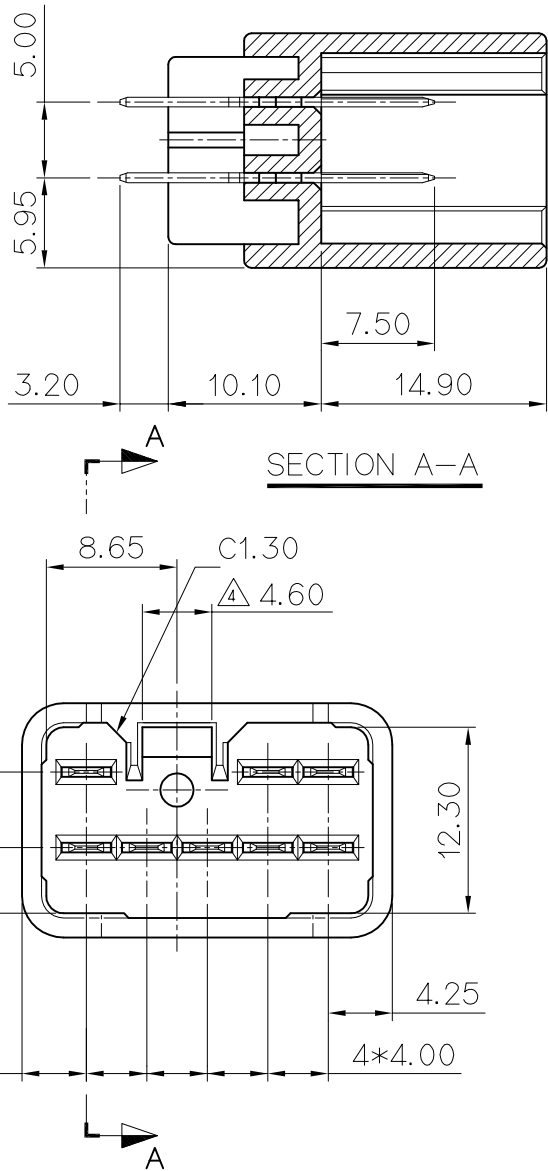

GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)								USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT		
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		

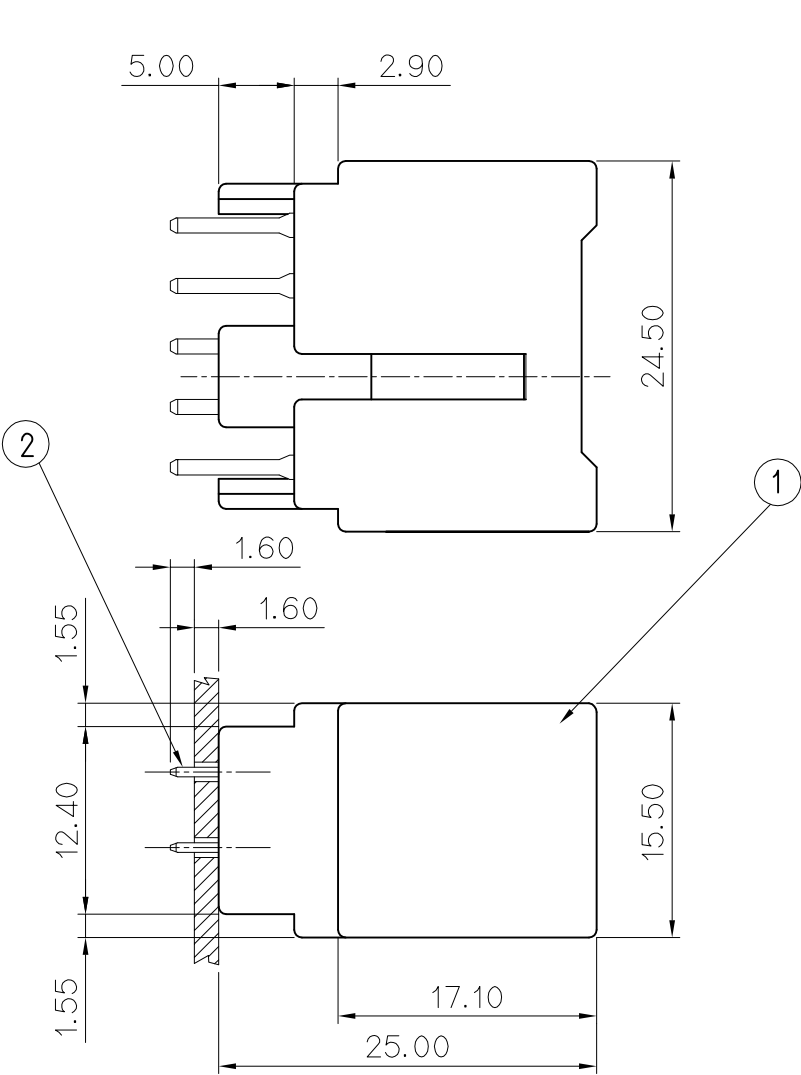

NOTE

- 
1. 지시하지 않는 R은 전부 0.5로 할것.

2. 제품기능상 유해한 BURR,변형 및 WELDLINE 등이 없을것.

3. 적용 HOUSING : MG651050

4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHER SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.

2. MUST FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.

3. APPLICATION HOUSING: MG651050

4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

	NO.	PART NAME	PART NO.	MATERIAL	Q'TY	FINISH
	①	.090Ⅱ PCB 8P HS'G(VRT)	MG671484	PBT	1	NATURAL
	②	PCB TAB TERMINAL(VRT)	ST790215-3	BRASS	8	PRE-TIN

	NO.	PART NAME	PART NO.	ASSEMBLY
	1	.090Ⅱ 11M PCB ASSY (VRT)	MG641485	① + ②

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.		
④	설/변(ECO-1105-313)오기 수정	LSY		'11.04.29	FINISH	SEE TABLE			
③	설/변(S100234)근거	CYJ			'10.09.20	WIRE RANGE	CLASS .090 II		
②	설/변(S100195)근거	CYJ			'10.07.28				
①	적용 PLUG HS'G 변경	SHIN			03.12.15	INSULATION	TYPE		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	±0.2	SCALE 2/1	PART NO.  MG641485
DR.	WON. 97.04.07	CHK.		12/1		12/2	PART NAME .090 II PCB 8P ASS'Y(VRT TYPE)		
CHK.	S.I. 	12/2	APP.		12/4				

ISSUE MARK