
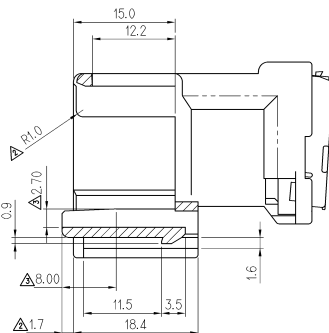


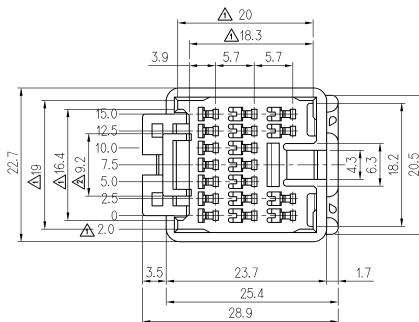




SECT. A-A

주 기

1. 제품기능상 유해한 FLASH, 변형 및 WELDLINE 등이 없을 것.
2. 적용 TERMINAL : ST740753
3. 적용 HOUSING : MG651575
4. R/HOLDER는 본 도면과 같이 1차 LOCK'G상태로 유지, 공급할 것.

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST740753
3. APPLICABLE HOUSING : MG651575
4. R/HOLDER MUST BE KEEP AND SUPPLY FIRST LOCKING CONDITION AS THIS DRAWING.

NO.	PART NO.	PART NAME	MATERIAL	COLOR
1	MG671570	050 18P REC. HS'G	PBT	NATURAL
2	MG671571	050 18P REC. R/HOLDER		NATURAL

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	



ISSUE MARK

				MATERIAL SEE TABLE		SEE TABLE		KET KOREA ELECTRIC TERMINAL CO., LTD.	
				FINISH		SEE TABLE		CLASS	
				WIRE RANGE		INSULATION		TYPE 050	
				LTR		REVISION RECORD		PART NO. MG641572	
				DR. WK CHOI '99.05.12		CHK. 5/13		SCALE 2/1	
				CHK.		APP. 5/13		PART NAME 050 18P REC. HS'G ASS'Y	