


NO.	PART NO.	PART NAME	MATERIAL	COLOR
①	MG671593	050 15P REC. HS'G	PBT	NATURAL
②	MG671594	050 15P REC. R/HOLDER		NATURAL

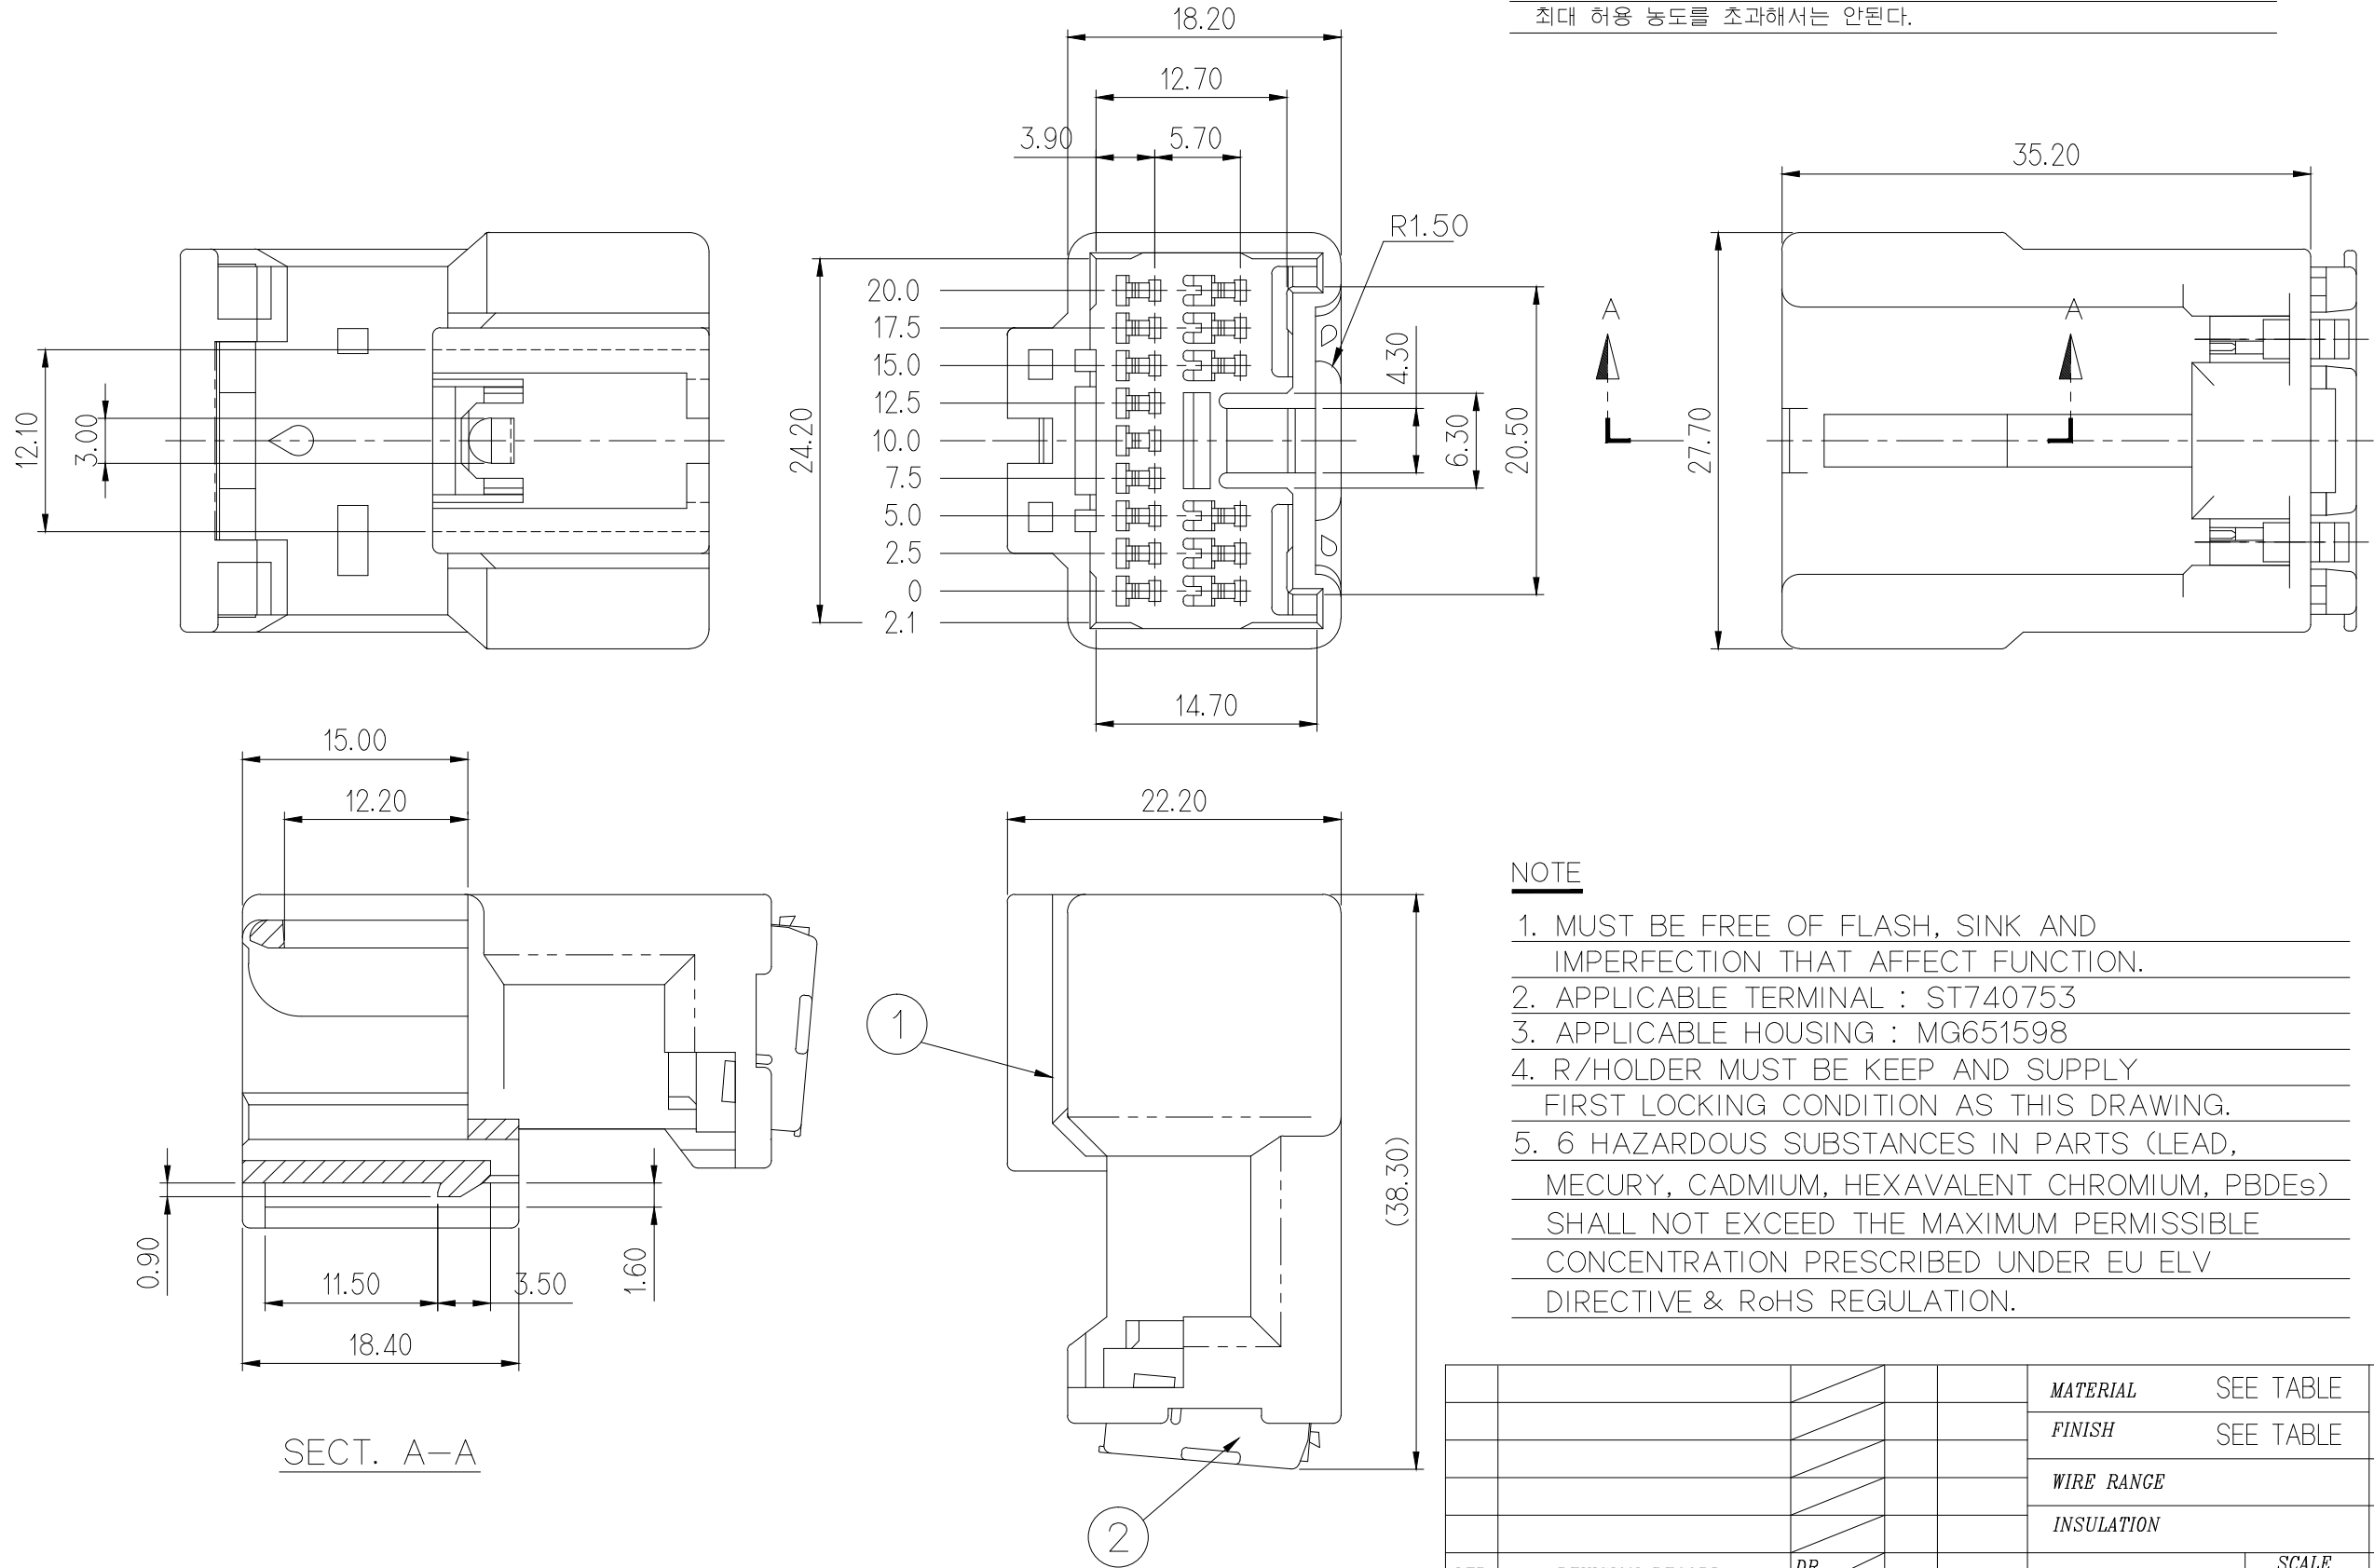

- 주 기
- 제품기능상 유해한 FLASH, 변형 및 WELDLINE등이 없을것.
 - 적용 TERMINAL : ST740753
 - 적용 HOUSING : MG651598
 - R/HOLDER는 본 도면과 같이 1차 LOCK'G상태로 유지, 공급할 것.
 - 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

- NOTE
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
 - APPLICABLE TERMINAL : ST740753
 - APPLICABLE HOUSING : MG651598
 - R/HOLDER MUST BE KEEP AND SUPPLY FIRST LOCKING CONDITION AS THIS DRAWING.
 - 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MECURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

					MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH		SEE TABLE		
					WIRE RANGE		CLASS		
					INSULATION		TYPE 050		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG641595
DR.			CHK. K K J			5/13	PART NAME		
CHK.			APP. CHOSH			5/13	050 15P REC. HS'G ASS'Y		

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK