

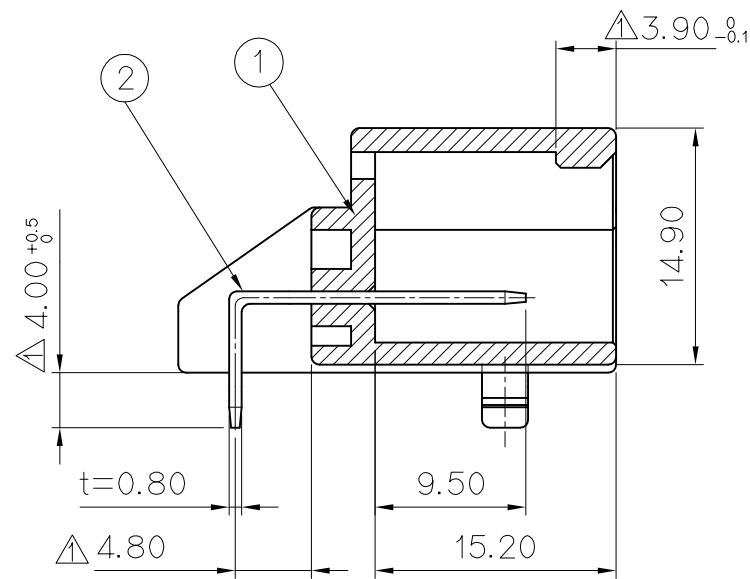
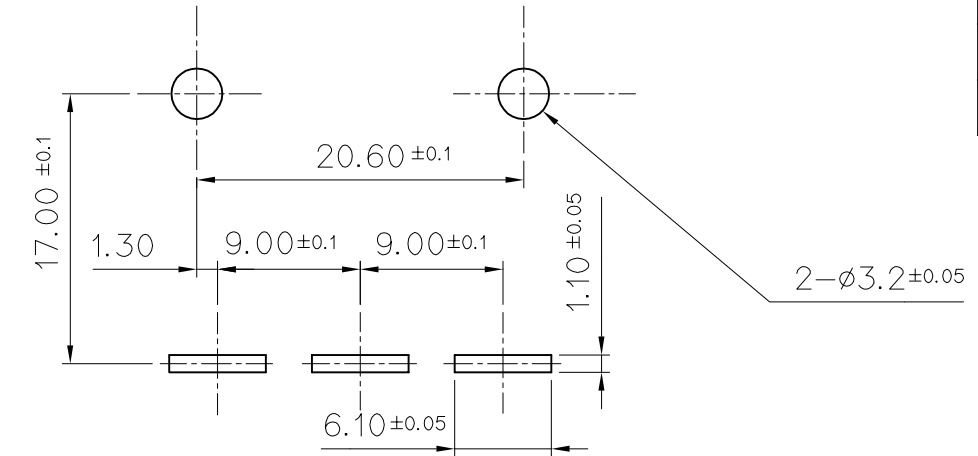
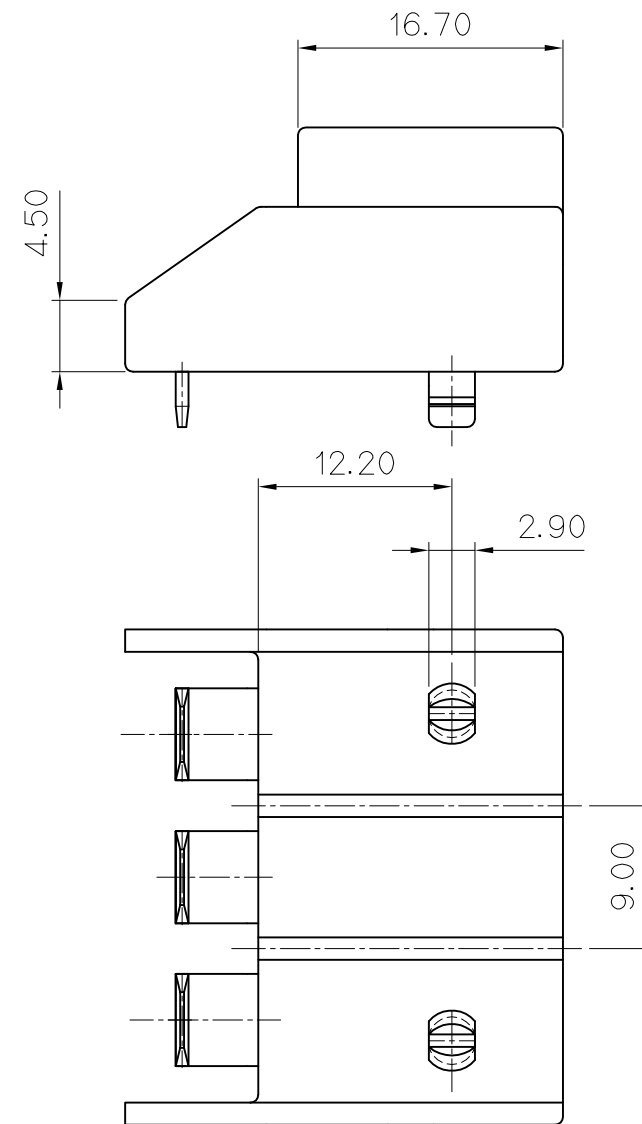


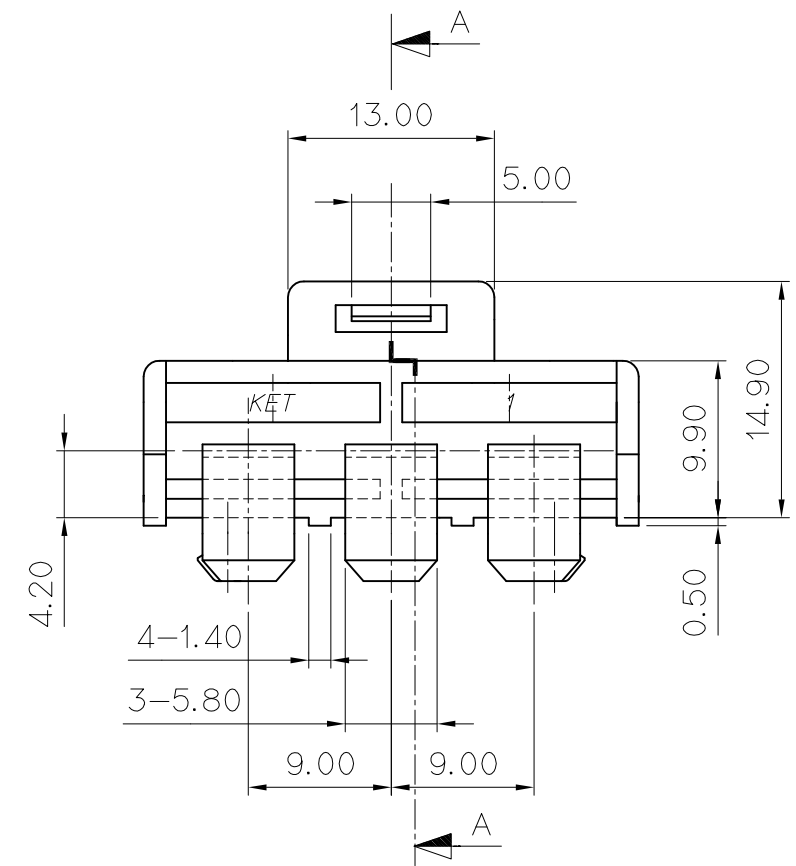


SECTION A-A

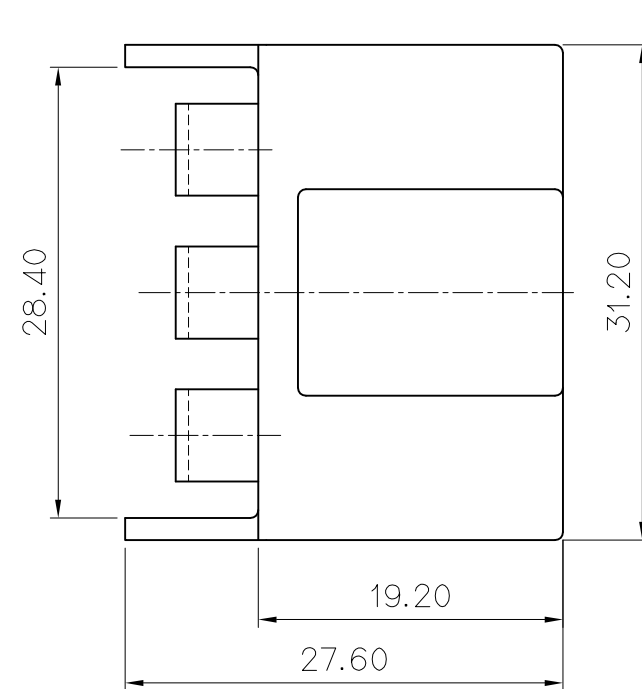

PCB BOARD LAYOUT (t=1.6mm)

NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG671658	.250 D/L 3P REC. HS'G(PCB)	NYLON66	NATURAL
2	P900712	.250 D/L TAB TM'L	BRASS	PRE-TIN

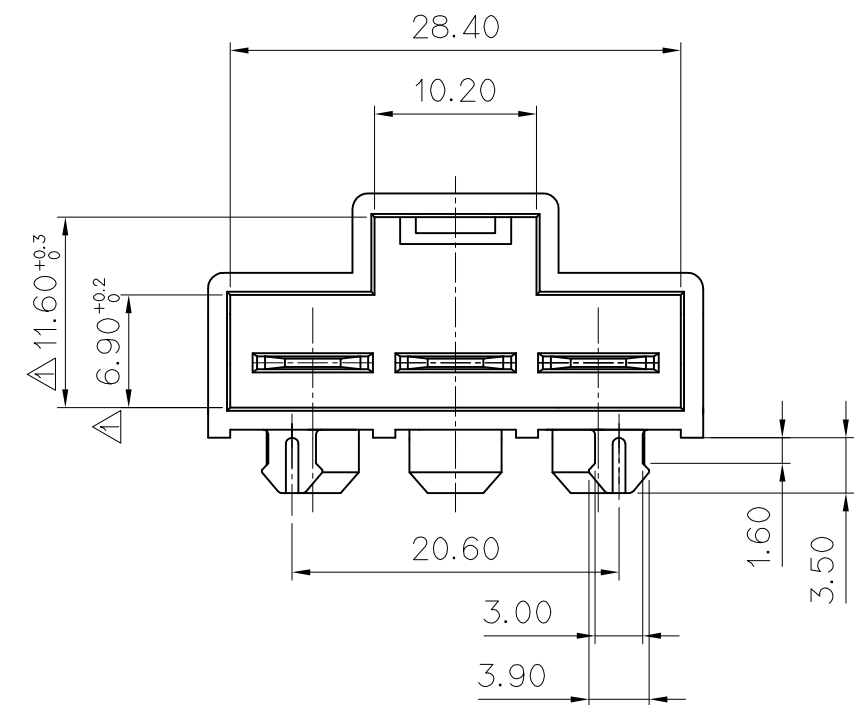

NOTE

1.적용 HS'G : MG611657



ISSUE MARK

GENERAL TOLERANCE (TERMINAL)					
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT
±0.2	±0.25	±0.3	±0.5	±30'	0.1

GENERAL TOLERANCE (HOUSING)						
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

					MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD		
					FINISH NATURAL				
					WIRE RANGE			CLASS	
					INSULATION			TYPE	
	도면 변경 누락으로 인한 재작성		INO	KO		'01.10.17			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG641659
DR.	HEE. '98.03.26		CHK.	H:\SHEET\SIGN\sign-12.DWG			PART NAME .250 D/L-3P PCB ASS'Y(HZT TYPE)		
CHK.	H:\SHEET\SIGN\sign-j.DWG		03.27	APP.	H:\SHEET\SIGN\sign-w.DWG		03.27		