

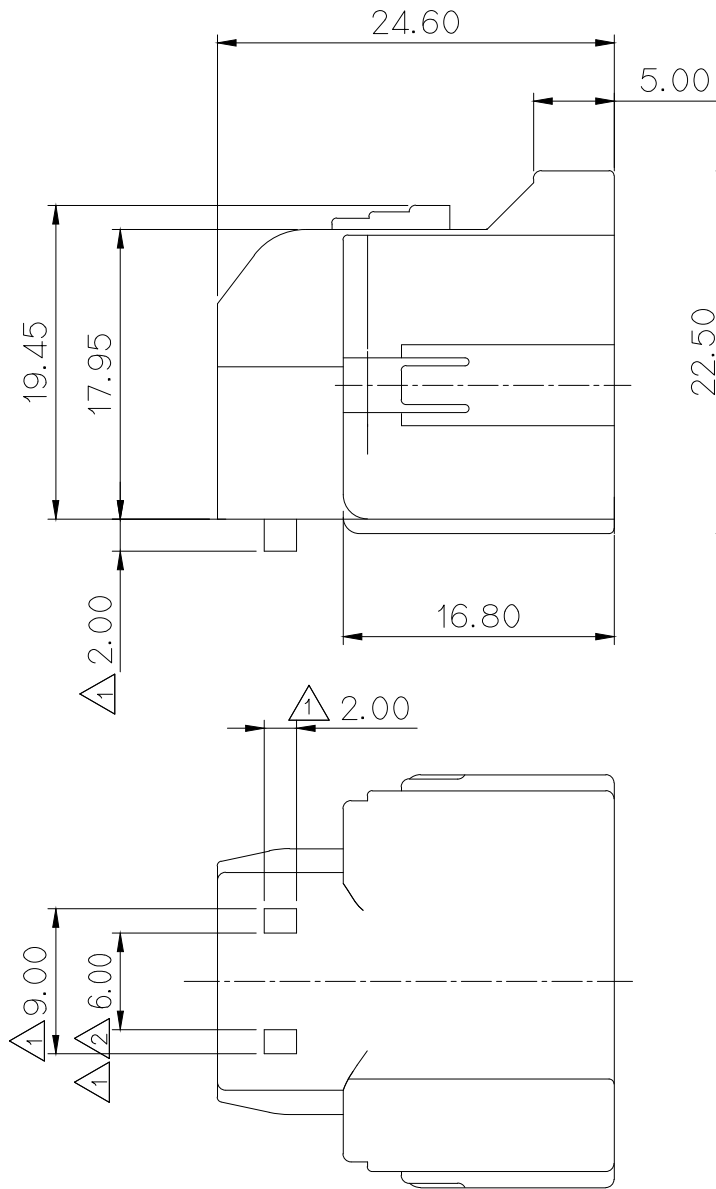


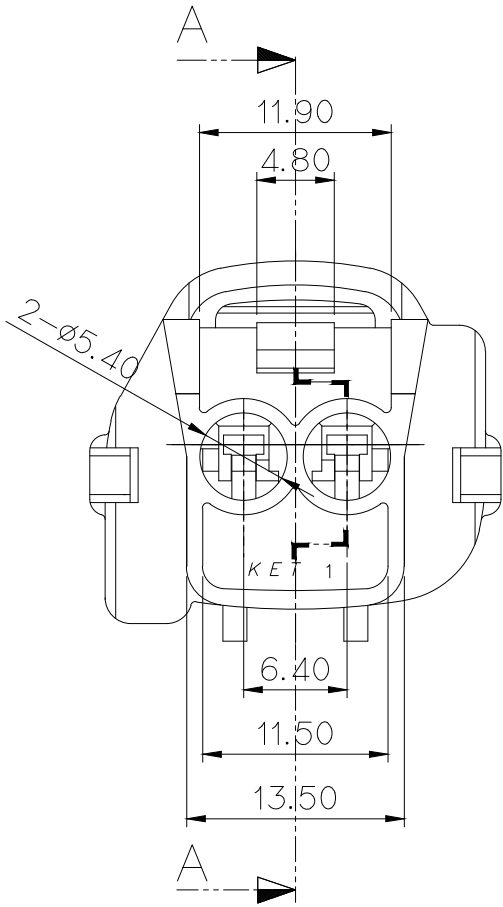

주 기

1. 제품기능상 유해한 BURR,변형 및 WELDLINE등이 없을 것.
2. 적용 TERMINAL: ST730623, 624, 625
3. 적용 WIRE SEAL: MG681114,1115,1119,1116
- △ 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

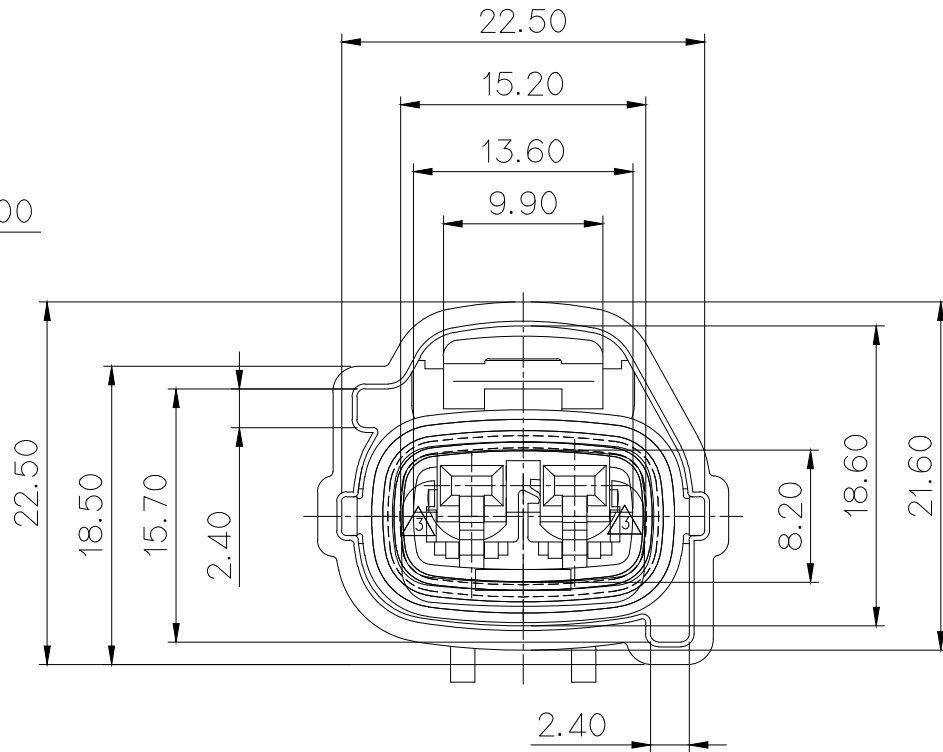


NOTE

1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL: ST730623, 624, 625
3. APPLICABLE WIRE SEAL: MG681114,1115,1119,1116
- △ 4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.20	±0.25	±0.30	±30'	0.10	

NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

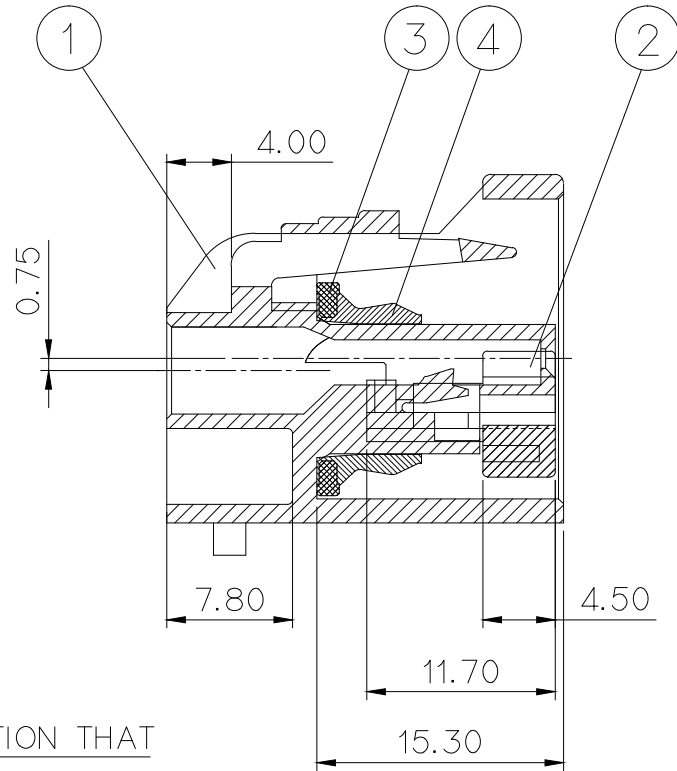

SECTION A-A

NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG671788	090 II W/P 2P REC. HS'G(IGN-LH)	SEE TABLE	SEE TABLE
2	MG671636	090 II W/P 2P REC. FRONT HOLDER		NATURAL
3	MG671638	090 II W/P 2P REC. I/SEAL STOPPER	PBT	BLACK
4	P900781	090 II W/P 2P INNER SEAL	SILICONE	RED

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH SEE TABLE		
	설계사양변경(S080310)근거 재작성 (SPACER 1차 LOCK 부 형상변경)	KMH			08.12.15	WIRE RANGE		CLASS
	시방변경 000091근거 (유진전장 요청)	HEO	---	---	000504	INSULATION		TYPE Y7283-7021-10
	시방변경 000005근거 재작성 (REAR COVER 관련 수정)	HEO	---	---	000224	SCALE 2/1		PART NO. MG641789
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE		
DR. HEO '98.10.23		CHK. 10/23				PART NAME 090 II WP 2P REC. ASS'Y (IGN COIL용 : LH)		
CHK. 10/27		APP. 10/28						

APPROVED

2016-02-26

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 1

ISSUE MARK