


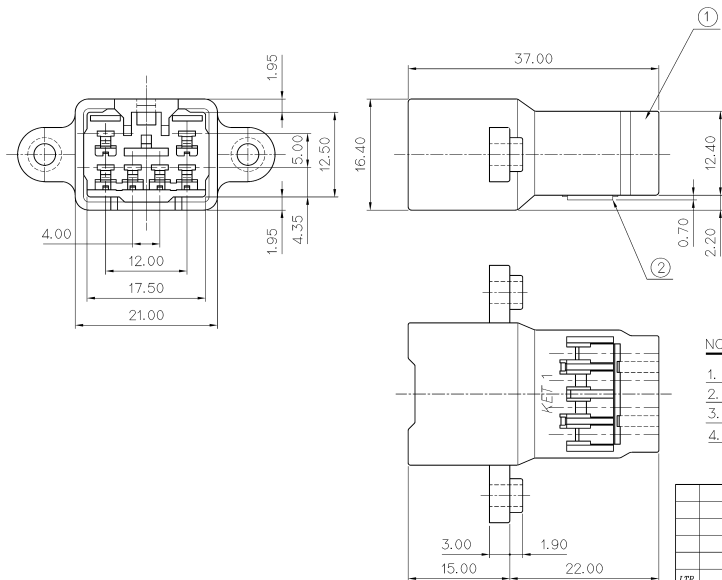

GENERAL TOLERANCE (HOUSING)							USED ON
1MAX	5MAX	10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.10	±0.15	±0.20	±0.25	±0.30	±30'	0.10	

NO	P / NO	P / NAME	MATERIAL	COLOR
1	MG671795	.090II B/M 6P REC' HS'G	PBT	NATURAL
2	MG671046	.090II 6P REC'- SPACER	PBT	NATURAL

NOTE

- 제품기능상 유해한 BURR, 변형 및 WELDLINE등이 없을것.
- 적용 TERMINAL : ST740672, 673, 674(090II TAB TM'L)
- 적용 HS'G : MG651044 (090II 6P PLUG HS'G ASS'Y)
- SPACER는 본 도면과 같이 1차 LOCK'G 상태여서 유지, 공급할 것.



ISSUE MARK

						MATERIAL	PBT	KET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.					
						FINISH	NATURAL							
						WIRE RANGE				CLASS	T, V, J-100, J150			
						INSULATION				TYPE	090 II			
LTR	REVISION RECORD				DR	CHK	APP	DATE	THROWING OFFSET IN NOTES	SEE TABLE	SCALE	2/1	PART NO.	MG641796
DR	CHANG '98.05.20				CHK	9/	5/20	PART NAME	090 II B/M 6P REC. HS'G ASS'Y					
CHK	CHANG 5/20				APP	5/20	5/20							