
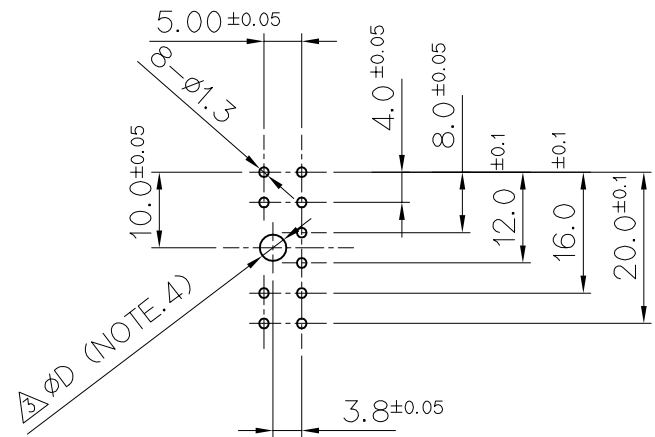

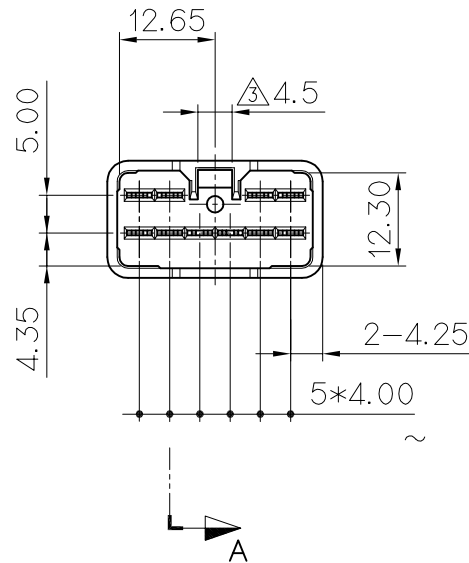
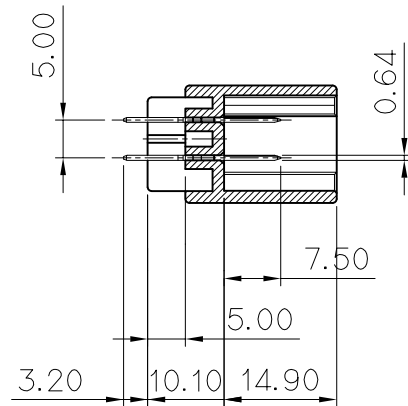
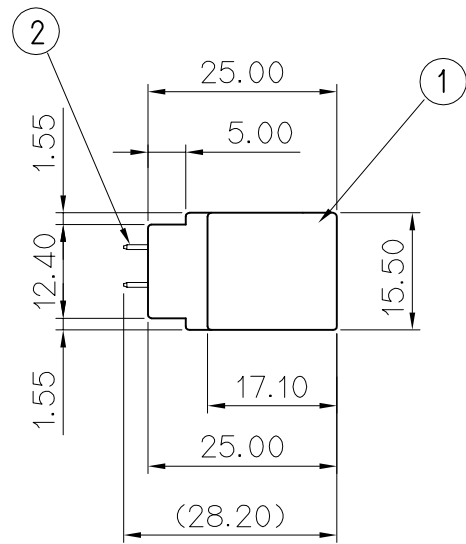
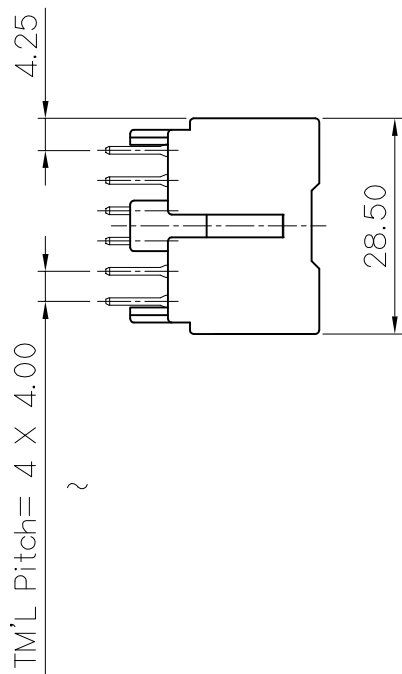

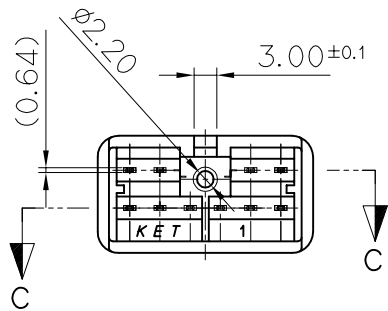


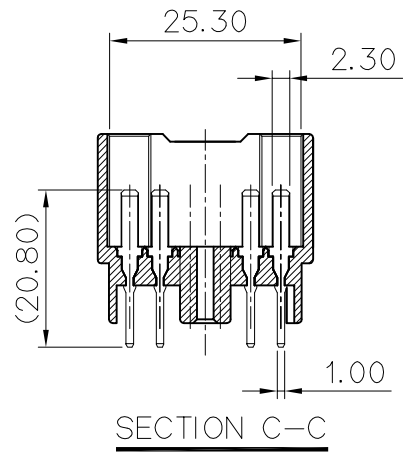

NOTE

- 지시하지 않는 R은 전부 0.5로 할것.
- 제품기능상 유해한 BURR,변형 및 WELDLINE등이 없을것.
- 적용 HOUSING: MG651056
- ØD=SCREW 직경 +0.5
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.


DIM'S of PCB

NOTE

- UNLESS OTHER SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
- MUST FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICATION HOUSING: MG651056
- ØD=SCREW DIAMETER +0.5
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	PART NAME	PART NO.	ASSEMBLY
1	090II 10M PCB ASSY(VRT)	MG641854	① + ②
2		MG641854T	① + ③

NO.	PART NAME	PART NO.	MATERIAL	Q'TY	FINISH
①	090 II 10M PCB HOUSING (VRT)	MG671853	PBT	1	NATURAL
②	PCB MALE TERMINAL(VRT)	ST790215-3	BRASS	10	PRE-TIN
③		ST792347-2			TIN

						MATERIAL	SEE TABLE	 KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
						FINISH	SEE TABLE	
③	설/변(ECO-1105-313)오기 수정	LSY			'11.04.29	WIRE RANGE		CLASS .090 II
②	설/변(S100234) 근거	CYJ			'10.09.20	INSULATION		TYPE
①	품명체제 변경에 따른 도면 재작성	PSH			'07.10.10	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE			
DR.	KO.98.05.12	CHK.	KO.		3/20	①090II 10M PCB ASSY(VRT TYPE)		
CHK.		APP.			3/20			

ISSUE MARK

△ MG641854,1854T